
pyPESTO Documentation

Release 0.2.9

The pyPESTO developers

Nov 05, 2021

USER'S GUIDE

1	Install and upgrade	3
1.1	Requirements	3
1.2	Install from PIP	3
1.3	Install from GIT	3
1.4	Upgrade	4
1.5	Install optional packages and external dependencies	4
2	Examples	5
2.1	Rosenbrock banana	5
2.2	Conversion reaction	19
2.3	Fixed parameters	25
2.4	AMICI Python example “Boehm”	28
2.5	Model import using the Petab format	36
2.6	Storage	43
2.7	A sampler study	53
2.8	MCMC sampling diagnostics	81
2.9	Optimization with Synthetic Data	91
2.10	Standard Optimization	92
2.11	Synthetic Optimization	93
2.12	Definition of Priors:	95
2.13	Save and load results as HDF5 files	98
2.14	Download the examples as notebooks	103
3	Storage	105
3.1	pyPESTO Problem	105
3.2	Parameter estimation	105
3.3	Sampling	107
3.4	Profiling	107
4	API reference	109
4.1	pyPESTO	109
4.2	Objective	133
4.3	Problem	155
4.4	Prediction	162
4.5	PEtab	165
4.6	Optimize	169
4.7	Profile	175
4.8	Sample	181
4.9	Result	187
4.10	Visualize	188

4.11	Engines	206
4.12	Startpoint	208
4.13	Storage	209
4.14	Logging	213
4.15	Ensemble	213
5	Contribute	225
5.1	Workflow	225
5.2	Environment	225
5.3	GitHub Actions	226
5.4	Documentation	226
5.5	Unit tests	226
5.6	PEP8	227
6	Deploy	229
6.1	Versions	229
6.2	Create a new release	229
6.3	Upload to PyPI	230
7	Release notes	231
7.1	0.2 series	231
7.2	0.1 series	237
7.3	0.0 series	238
8	Authors	243
9	Contact	245
10	License	247
11	Logo	249
12	Indices and tables	251
	Python Module Index	253
	Index	255

Version: 0.2.9

Source code: <https://github.com/icb-dcm/pypesto>

INSTALL AND UPGRADE

1.1 Requirements

This package requires Python 3.7 or later. It is tested on Linux using Travis continuous integration.

1.1.1 I cannot use my system's Python distribution, what now?

Several Python distributions can co-exist on a single system. If you don't have access to a recent Python version via your system's package manager (this might be the case for old operating systems), it is recommended to install the latest version of the [Anaconda Python 3 distribution](#).

Also, there is the possibility to use multiple virtual environments via:

```
python3 -m virtualenv ENV_NAME
source ENV_NAME/bin/activate
```

where ENV_NAME denotes an individual environment name, if you do not want to mess up the system environment.

1.2 Install from PIP

The package can be installed from the Python Package Index PyPI via pip:

```
pip3 install pypesto
```

1.3 Install from GIT

If you want the bleeding edge version, install directly from github:

```
pip3 install git+https://github.com/icb-dcm/pypesto.git
```

If you need to have access to the source code, you can download it via:

```
git clone https://github.com/icb-dcm/pypesto.git
```

and then install from the local repository via:

```
cd pypesto
pip3 install .
```

1.4 Upgrade

If you want to upgrade from an existing previous version, replace `install` by `install --upgrade` in the above commands.

1.5 Install optional packages and external dependencies

- pyPESTO includes multiple convenience methods to simplify parameter estimation for models generated using the toolbox [AMICI](#). To use AMICI, install it via pip:

```
pip3 install amici
```

or, in case of problems, follow the full instructions from the [AMICI](#) documentation.

- This package inherently supports optimization using the dlib toolbox. To use it, install dlib via:

```
pip3 install dlib
```

- All external dependencies can be installed through [this shell script](#).

EXAMPLES

We provide a collection of example notebooks to get a better idea of how to use pyPESTO, and illustrate core features. The notebooks can be run locally with an installation of jupyter (`pip install jupyter`), or online on Google Colab or nbviewer, following the links at the top of each notebook. At least an installation of pyPESTO is required, which can be performed by

```
# install if not done yet
!pip install pypesto --quiet
```

Potentially, further dependencies may be required.

The following examples cover typical use cases and should help get a better idea of how to use this package:

2.1 Rosenbrock banana

Here, we perform optimization for the Rosenbrock banana function, which does not require an AMICI model. In particular, we try several ways of specifying derivative information.

```
[ ]: # install if not done yet
# %pip install pypesto --quiet

[1]: import pypesto
import pypesto.visualize as visualize
import numpy as np
import scipy as sp
import matplotlib.pyplot as plt
from mpl_toolkits.mplot3d import Axes3D

%matplotlib inline
```

2.1.1 Define the objective and problem

```
[2]: # first type of objective
objective1 = pypesto.Objective(fun=sp.optimize.rosen,
                               grad=sp.optimize.rosen_der,
                               hess=sp.optimize.rosen_hess)

# second type of objective
def rosen2(x):
    return (sp.optimize.rosen(x),
```

(continues on next page)

(continued from previous page)

```
        sp.optimize.rosen_der(x),
        sp.optimize.rosen_hess(x))
objective2 = pypesto.Objective(fun=rosen2, grad=True, hess=True)

dim_full = 10
lb = -5 * np.ones((dim_full, 1))
ub = 5 * np.ones((dim_full, 1))


problem1 = pypesto.Problem(objective=objective1, lb=lb, ub=ub)
problem2 = pypesto.Problem(objective=objective2, lb=lb, ub=ub)
```

Illustration

```
[3]: x = np.arange(-2, 2, 0.1)
y = np.arange(-2, 2, 0.1)
x, y = np.meshgrid(x, y)
z = np.zeros_like(x)
for j in range(0, x.shape[0]):
    for k in range(0, x.shape[1]):
        z[j,k] = objective1([x[j,k], y[j,k]], (0,))
```

```
[4]: fig = plt.figure()
fig.set_size_inches(*(14,10))
ax = plt.axes(projection='3d')
ax.plot_surface(X=x, Y=y, Z=z)
plt.xlabel('x axis')
plt.ylabel('y axis')
ax.set_title('cost function values')

[4]: Text(0.5, 0.92, 'cost function values')
```

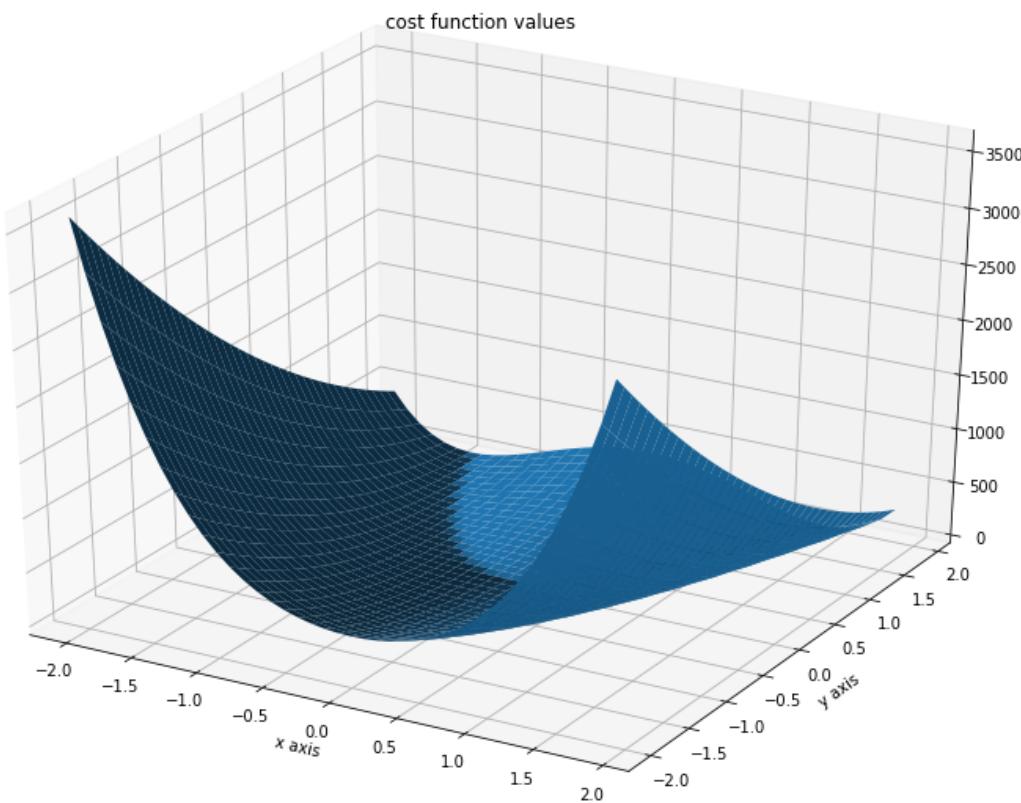

2.1.2 Run optimization

```
[5]: import pypesto.optimize as optimize

[6]: %time

# create different optimizers
optimizer_bfgs = optimize.ScipyOptimizer(method='l-bfgs-b')
optimizer_tnc = optimize.ScipyOptimizer(method='TNC')
optimizer_dogleg = optimize.ScipyOptimizer(method='dogleg')

# set number of starts
n_starts = 20

# save optimizer trace
history_options = pypesto.HistoryOptions(trace_record=True)

# Run optimizaitons for different optimizers
result1_bfgs = optimize.minimize(
    problem=problem1, optimizer=optimizer_bfgs,
    n_starts=n_starts, history_options=history_options)
result1_tnc = optimize.minimize(
    problem=problem1, optimizer=optimizer_tnc,
    n_starts=n_starts, history_options=history_options)
```

(continues on next page)

(continued from previous page)

```

result1_dogleg = optimize.minimize(
    problem=problem1, optimizer=optimizer_dogleg,
    n_starts=n_starts, history_options=history_options)

# Optimize second type of objective
result2 = optimize.minimize(
    problem=problem2, optimizer=optimizer_tnc, n_starts=n_starts)

Function values from history and optimizer do not match: 2.685929315976887, 2.
→9820162443657527
Parameters obtained from history and optimizer do not match: [ 9.81668828e-01  9.
→70664899e-01  9.44081691e-01  8.86185728e-01
 7.98866760e-01  6.27503392e-01  3.49193984e-01  1.00863999e-01
 1.18119992e-02 -4.83096174e-04], [0.98232811  0.9607169   0.93006041  0.86376905  0.
→72679074  0.51464422
 0.25715153  0.03390018  0.0134388   0.00224348]
Function values from history and optimizer do not match: 2.932320470464073, 3.
→104833804292291
Parameters obtained from history and optimizer do not match: [9.85695690e-01  9.
→66998320e-01  9.34405532e-01  8.72211105e-01
 7.61716907e-01  5.82160864e-01  2.90132686e-01  5.88015713e-02
 1.02493152e-02  1.44786818e-04], [9.76820249e-01  9.49203293e-01  9.03611145e-01  8.
→32711736e-01
 6.92021069e-01  4.71244784e-01  2.26981271e-01  1.93600745e-02
 9.06285841e-03  3.00716108e-04]
Function values from history and optimizer do not match: 7.128857018893593, 7.
→737539574292646
Parameters obtained from history and optimizer do not match: [-9.74521002e-01  9.
→48916364e-01  8.98382180e-01  7.95485807e-01
 6.32334509e-01  3.95389632e-01  1.55262583e-01  2.24615758e-02
 9.92812211e-03  4.70538835e-05], [-0.95137113  0.92287756  0.85600385  0.74220324 ↴
→0.53469862  0.25223695
 0.05388462  0.01175751  0.01035533  0.00121333]
Function values from history and optimizer do not match: 4.047666500407507, 4.
→8092850089870245
Parameters obtained from history and optimizer do not match: [9.57097378e-01  9.
→15272882e-01  8.35583627e-01  6.92924153e-01
 4.69156347e-01  1.98916115e-01  2.87951418e-02  1.21495892e-02
 1.14276335e-02  2.48487865e-04], [9.37837181e-01  8.73541886e-01  7.61292462e-01  5.
→64720865e-01
 2.84119482e-01  6.17767487e-02  1.53662912e-02  1.54992154e-02
 1.49513982e-02  2.98560604e-04]
Function values from history and optimizer do not match: 4.760963749486806, 5.
→255690010134404
Parameters obtained from history and optimizer do not match: [-0.98990379  0.98886801 ↴
→ 0.98189121  0.96587616  0.93451723  0.87262109
 0.75889559  0.56883791  0.31364781  0.07883034], [-0.99248035  0.99162316  0.
→97889433  0.95364865  0.91078502  0.8261375
 0.68236478  0.45820395  0.17444197  0.01383626]
Function values from history and optimizer do not match: 1.8159939922237558, 2.
→5425135960926237
Parameters obtained from history and optimizer do not match: [9.90583524e-01  9.
→80917081e-01  9.63072632e-01  9.30325108e-01
 8.61713989e-01  7.40678602e-01  5.38268550e-01  2.71328618e-01
 5.43996813e-02  7.89698144e-04], [9.89162276e-01  9.78043570e-01  9.51094059e-01  9.
→02211862e-01
 8.07645490e-01  6.35406055e-01  3.75384767e-01  1.11075371e-01

```

(continues on next page)

(continued from previous page)

```

1.30319964e-02 2.11963742e-04]
Function values from history and optimizer do not match: 2.2546577084566284, 2.
↪988463828057193
Parameters obtained from history and optimizer do not match: [9.86890406e-01 9.
↪73738159e-01 9.51089323e-01 9.02086672e-01
8.09027663e-01 6.46629154e-01 4.04671023e-01 1.51442890e-01
1.94187285e-02 2.45054194e-04], [9.81148194e-01 9.60640784e-01 9.21690034e-01 8.
↪55030060e-01
7.31180374e-01 5.23069013e-01 2.44624625e-01 3.39441804e-02
1.03741576e-02 2.45306769e-05]
Function values from history and optimizer do not match: 0.3545683077008359, 0.
↪5906121485206447
Parameters obtained from history and optimizer do not match: [0.99668472 0.99262575 0.
↪98945665 0.98129911 0.96532923 0.93081497
0.86315388 0.74328951 0.53910453 0.2736718 ], [0.9963228 0.99215562 0.98514259 0.
↪97132273 0.94683482 0.89670025
0.80300196 0.64224614 0.40061592 0.14210795]
Function values from history and optimizer do not match: 1.442951465698237, 2.
↪117657844069939
Parameters obtained from history and optimizer do not match: [0.99253701 0.98698288 0.
↪97438388 0.94864025 0.89249411 0.79343394
0.62110958 0.37154848 0.12142293 0.00337751], [9.85576055e-01 9.72515609e-01 9.
↪52500598e-01 9.14984751e-01
8.40282960e-01 7.07108893e-01 4.93844010e-01 2.19299261e-01
1.80684261e-02 2.39353088e-04]
Function values from history and optimizer do not match: 0.4310215367360306, 0.
↪7200757805862191
Parameters obtained from history and optimizer do not match: [0.99728801 0.99265292 0.
↪98655945 0.97724776 0.95330363 0.91375386
0.83290125 0.68949822 0.4687524 0.21461214], [0.99666432 0.99530499 0.9871224 0.
↪96976884 0.94230384 0.89383977
0.79420195 0.62752848 0.3793222 0.11129682]
Function values from history and optimizer do not match: 6.33997905147026, 7.
↪069668392692864
Parameters obtained from history and optimizer do not match: [7.84450616e-01 6.
↪10188497e-01 3.64032562e-01 1.19476022e-01
1.25200919e-02 9.74166479e-03 1.00503247e-02 8.51949533e-03
9.92120699e-03 1.97235559e-04], [ 7.13358486e-01 4.93846146e-01 2.05601150e-01 2.
↪46828697e-02
1.00531820e-02 8.83759494e-03 9.93584452e-03 1.16356575e-02
1.00772170e-02 -9.19777874e-05]
Function values from history and optimizer do not match: 1.080010188007246, 1.
↪638996874292531
Parameters obtained from history and optimizer do not match: [0.99354151 0.98796198 0.
↪97743947 0.96147507 0.92290179 0.84825176
0.71159467 0.49318554 0.223647 0.03035961], [0.99093761 0.98310117 0.96952353 0.
↪94165684 0.88399848 0.77718421
0.59296742 0.3287277 0.08605952 0.00216266]
Function values from history and optimizer do not match: 6.334069745693479, 7.
↪027921368861192
Parameters obtained from history and optimizer do not match: [-0.98264119 0.97390376_
↪ 0.94694027 0.8905699 0.79188661 0.62198099
0.37540054 0.12148722 0.01380672 0.00504649], [-0.97385408 0.95844934 0.
↪9257917 0.85697013 0.71970238 0.49533252
0.21270446 0.03011495 0.00979574 -0.00651404]



```


```
CPU times: user 2.74 s, sys: 37.7 ms, total: 2.78 s
Wall time: 2.74 s
```

Visualize and compare optimization results

```
[7]: # plot separated waterfalls
visualize.waterfall(result1_bfgs, size=(15, 6))
visualize.waterfall(result1_tnc, size=(15, 6))
visualize.waterfall(result1_dogleg, size=(15, 6))
```

```
[7]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb3be1ba0d0>
```

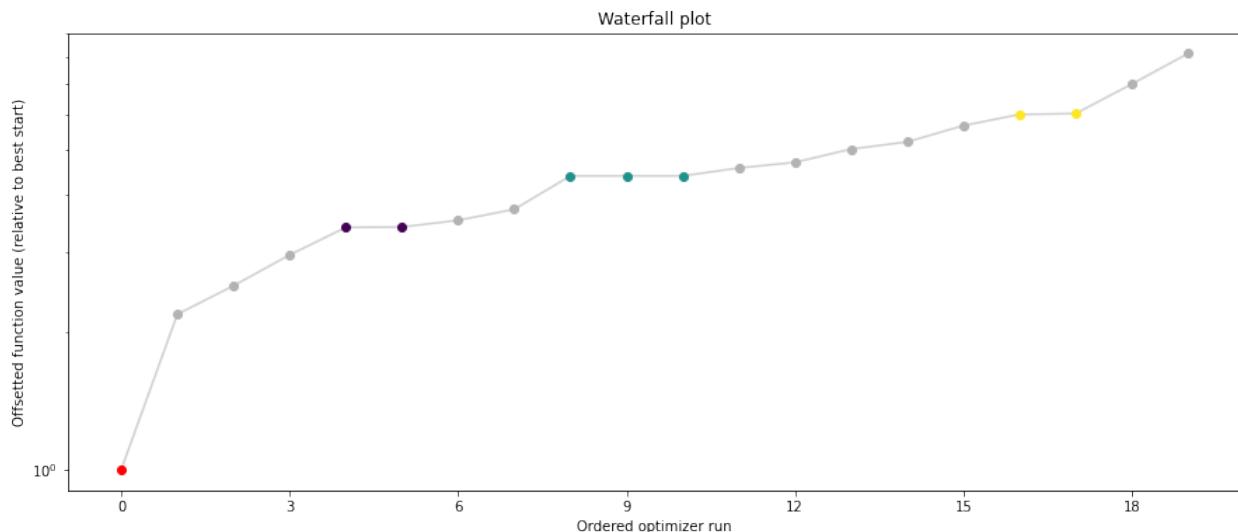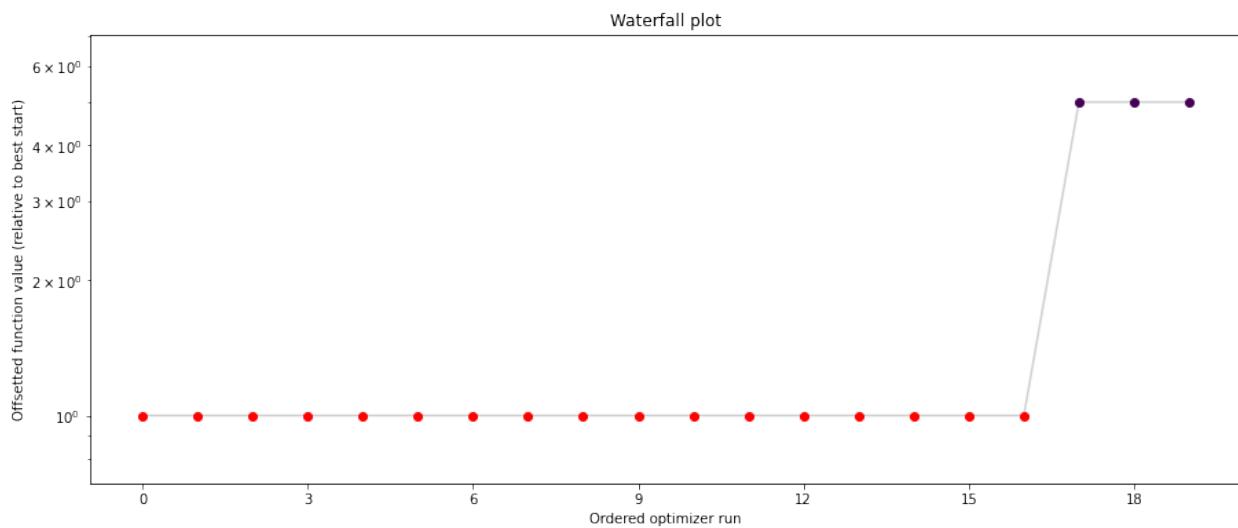


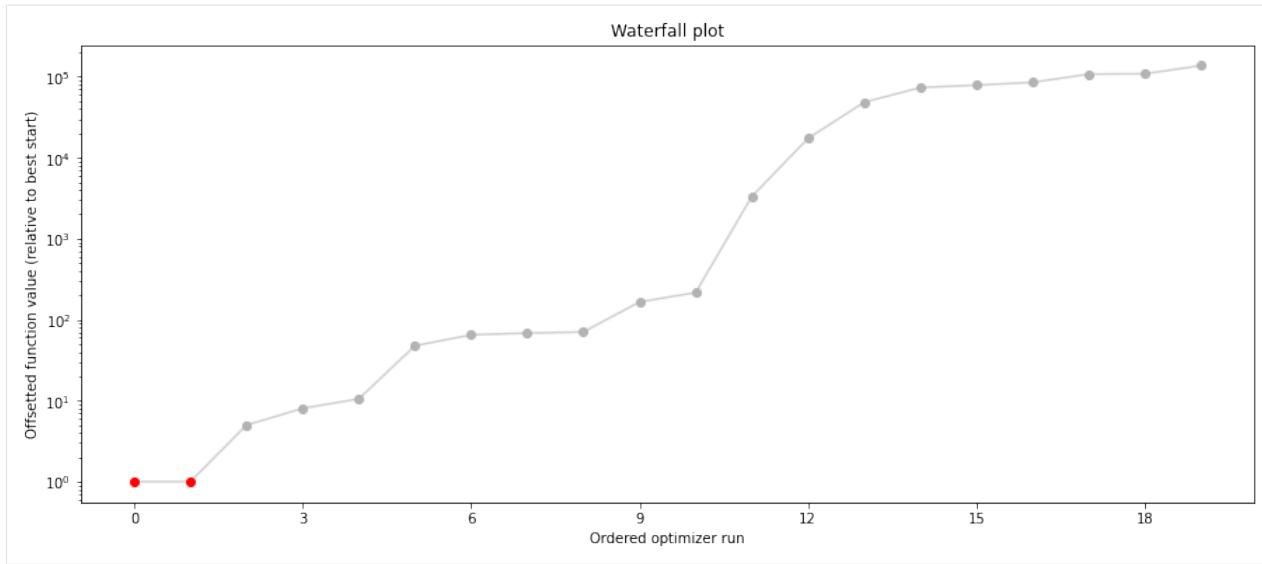

We can now have a closer look, which method performed better: Let's first compare bfgs and TNC, since both methods gave good results. How does the fine convergence look like?

```
[8]: # plot one list of waterfalls
visualize.waterfall([result1_bfgs, result1_tnc],
                    legends=['L-BFGS-B', 'TNC'],
                    start_indices=10,
                    scale_y='lin')
```

[8]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb3bf463760>

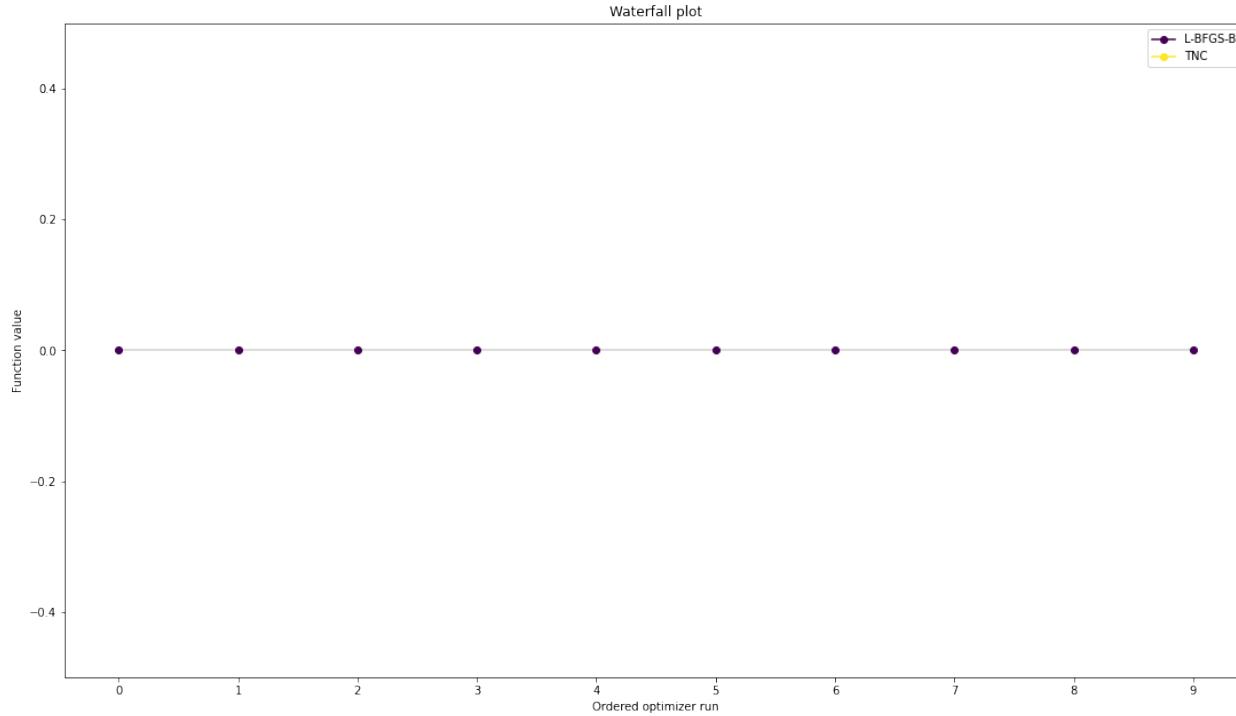

```
[9]: # retrieve second optimum
```

(continues on next page)

(continued from previous page)

```

all_x = result1_bfgs.optimize_result.get_for_key('x')
all_fval = result1_bfgs.optimize_result.get_for_key('fval')
x = all_x[19]
fval = all_fval[19]
print('Second optimum at: ' + str(fval))


# create a reference point from it
ref = {'x': x, 'fval': fval, 'color': [
    0.2, 0.4, 1., 1.], 'legend': 'second optimum'}
ref = visualize.create_references(ref)

# new waterfall plot with reference point for second optimum
visualize.waterfall(result1_dogleg, size=(15, 6),
                     scale_y='lin', y_limits=[-1, 101],
                     reference=ref, colors=[0., 0., 0., 1.])

```

Second optimum at: 3.9865791142048876

[9]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb3bde83940>

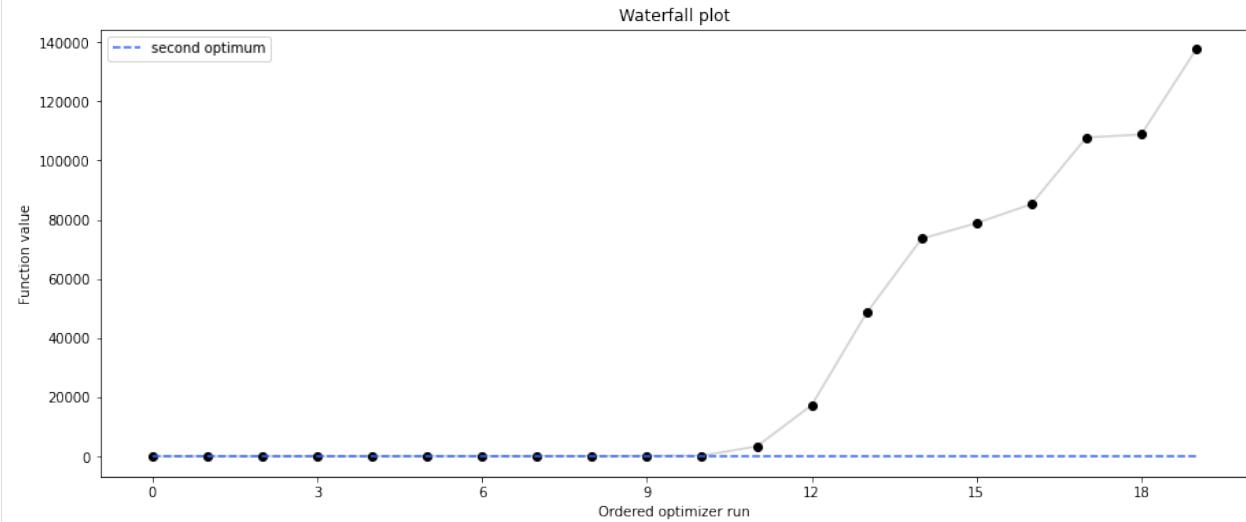

2.1.3 Visualize parameters


There seems to be a second local optimum. We want to see whether it was also found by the dogleg method

```

[10]: visualize.parameters([result1_bfgs, result1_tnc],
                        legends=['L-BFGS-B', 'TNC'],
                        balance_alpha=False)
visualize.parameters(result1_dogleg,
                     legends='dogleg',
                     reference=ref,
                     size=(15, 10),
                     start_indices=[0, 1, 2, 3, 4, 5],
                     balance_alpha=False)

```

[10]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb3bdd5b430>

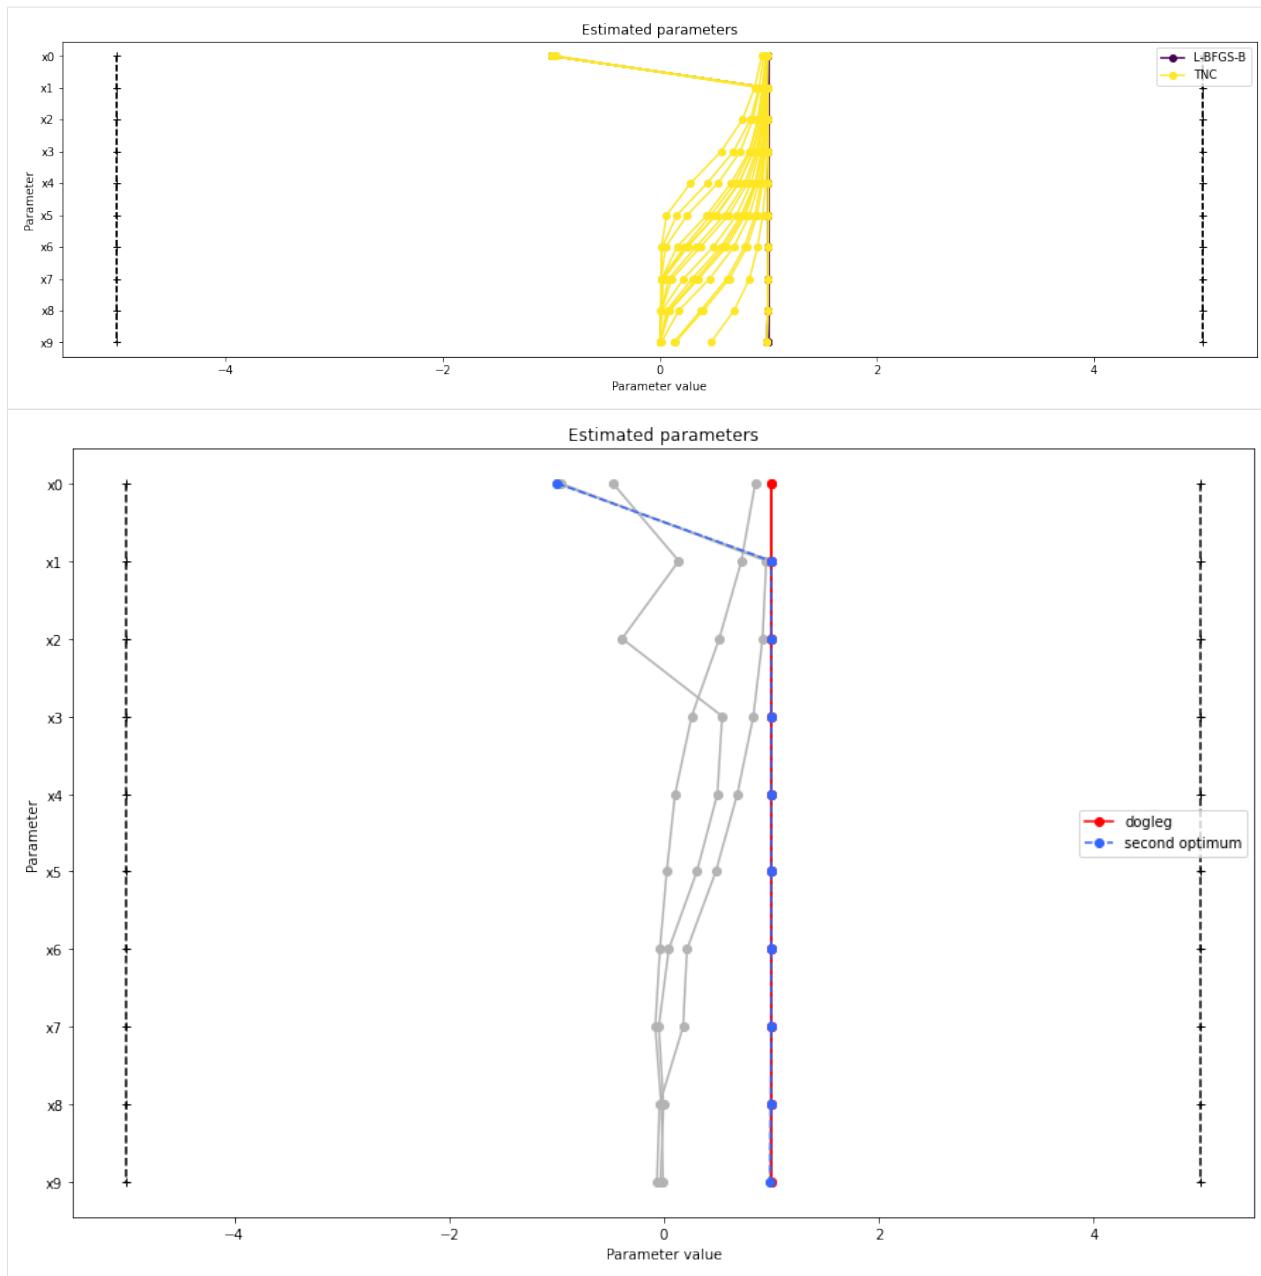

If the result needs to be examined in more detail, it can easily be exported as a pandas.DataFrame:

```
[11]: df = result1_tnc.optimize_result.as_dataframe(
    ['fval', 'n_fval', 'n_grad', 'n_hess', 'n_res', 'n_sres', 'time'])
df.head()

[11]:      fval  n_fval  n_grad  n_hess  n_res  n_sres     time
0  0.590612      101      101       0       0       0  0.052775
1  1.779748      101      101       0       0       0  0.049476
2  2.117658      101      101       0       0       0  0.039615
3  2.542514      101      101       0       0       0  0.064188
4  2.982016      101      101       0       0       0  0.024157
```


Optimizer history


Let's compare optimizer progress over time.

```
[12]: # plot one list of waterfalls
visualize.optimizer_history([result1_bfgs, result1_tnc],
                           legends=['L-BFGS-B', 'TNC'],
                           reference=ref)

# plot one list of waterfalls
visualize.optimizer_history(result1_dogleg,
                           reference=ref)
```

[12]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb3bdbcc820>

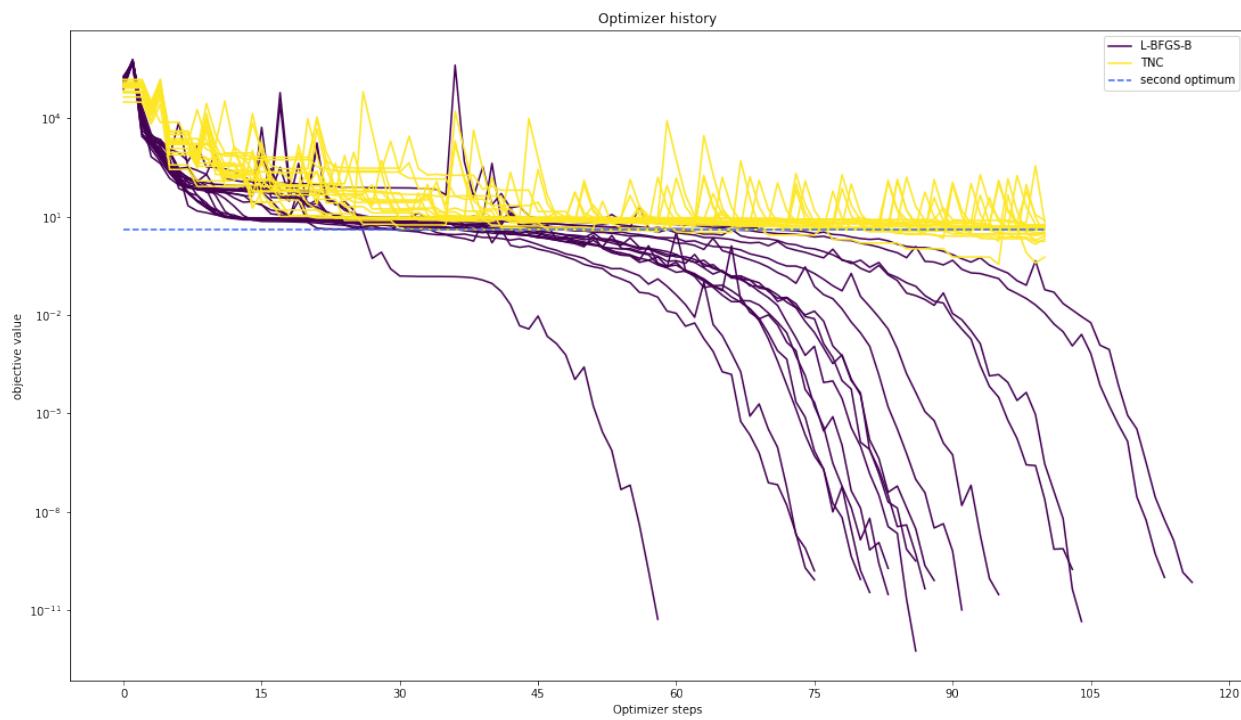

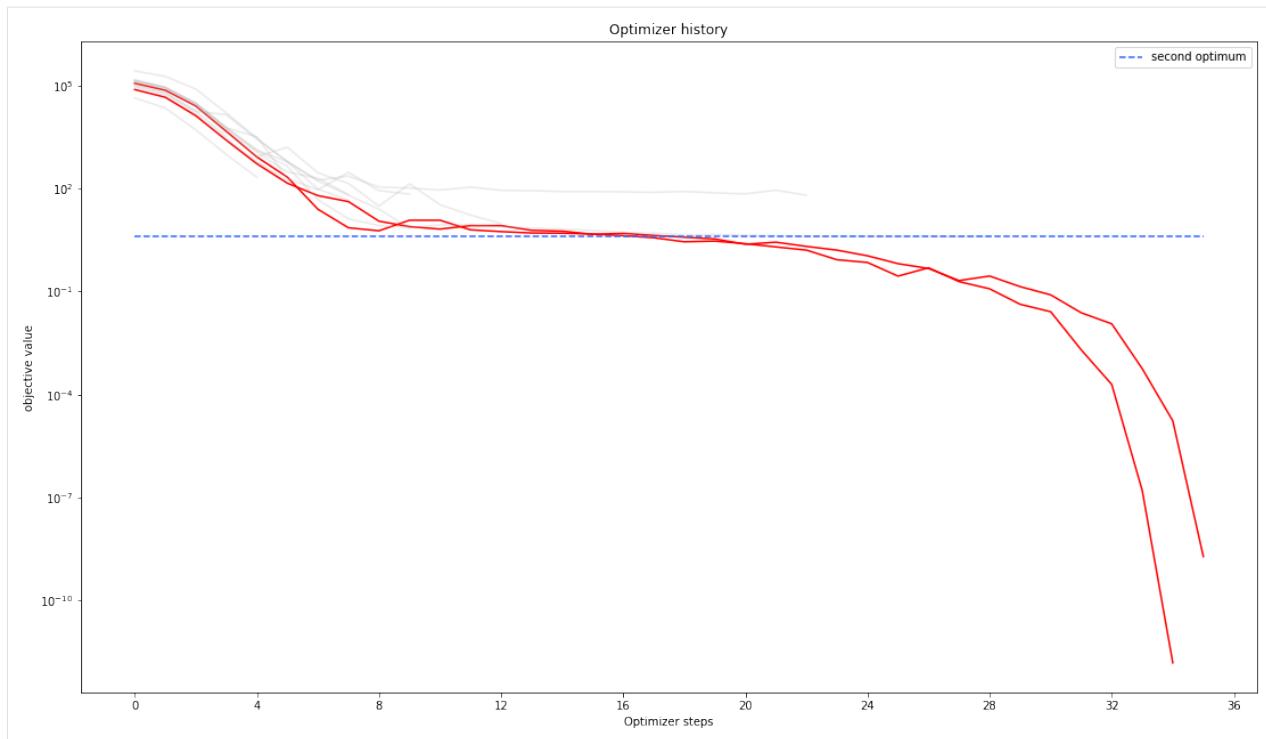


We can also visualize this using other scalings or offsets...

```
[13]: # plot one list of waterfalls
visualize.optimizer_history([result1_bfgs, result1_tnc],
                           legends=['L-BFGS-B', 'TNC'],
                           reference=ref,
                           offset_y=0.)

# plot one list of waterfalls
visualize.optimizer_history([result1_bfgs, result1_tnc],
                           legends=['L-BFGS-B', 'TNC'],
                           reference=ref,
                           scale_y='lin',
                           y_limits=[-1., 11.])
```

```
[13]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb3be01d130>
```

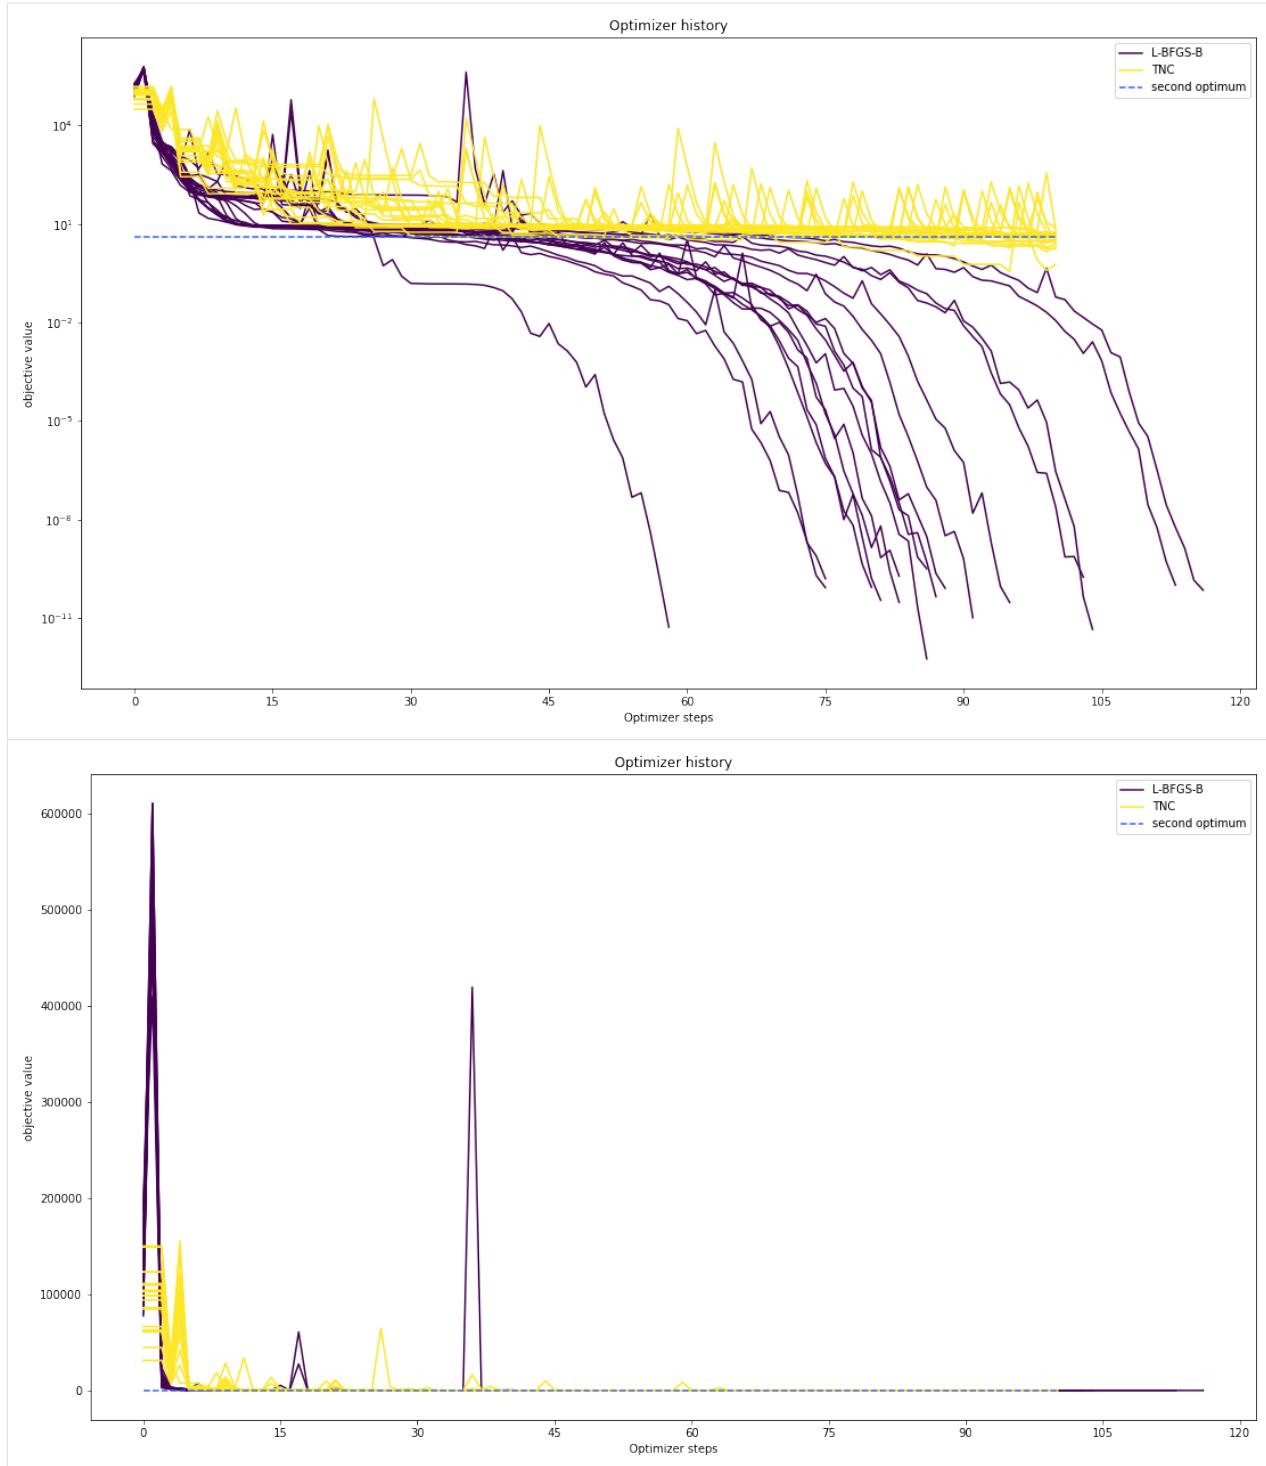

2.1.4 Compute profiles

The profiling routine needs a problem, a results object and an optimizer.

Moreover it accepts an index of integer (profile_index), whether or not a profile should be computed.

Finally, an integer (result_index) can be passed, in order to specify the local optimum, from which profiling should be started.

```
[14]: import pypesto.profile as profile
```

```
[15]: %%time
```

```
# compute profiles
profile_options = profile.ProfileOptions(min_step_size=0.0005,
                                         delta_ratio_max=0.05,
                                         default_step_size=0.005,
                                         ratio_min=0.01)

result1_bfgs = profile.parameter_profile(
    problem=problem1,
    result=result1_bfgs,
    optimizer=optimizer_bfgs,
    profile_index=np.array([1, 1, 1, 0, 0, 1, 0, 1, 0, 0, 0]),
    result_index=0,
    profile_options=profile_options)


# compute profiles from second optimum
result1_bfgs = profile.parameter_profile(
    problem=problem1,
    result=result1_bfgs,
    optimizer=optimizer_bfgs,
    profile_index=np.array([1, 1, 1, 0, 0, 1, 0, 1, 0, 0, 0]),
    result_index=19,
    profile_options=profile_options)
```

```
CPU times: user 1.31 s, sys: 4.28 ms, total: 1.32 s
Wall time: 1.32 s
```

Visualize and analyze results

pypesto offers easy-to-use visualization routines:

```
[16]: # specify the parameters, for which profiles should be computed
ax = visualize.profiles(result1_bfgs, profile_indices = [0,1,2,5,7],
                        reference=ref, profile_list_ids=[0, 1])
```

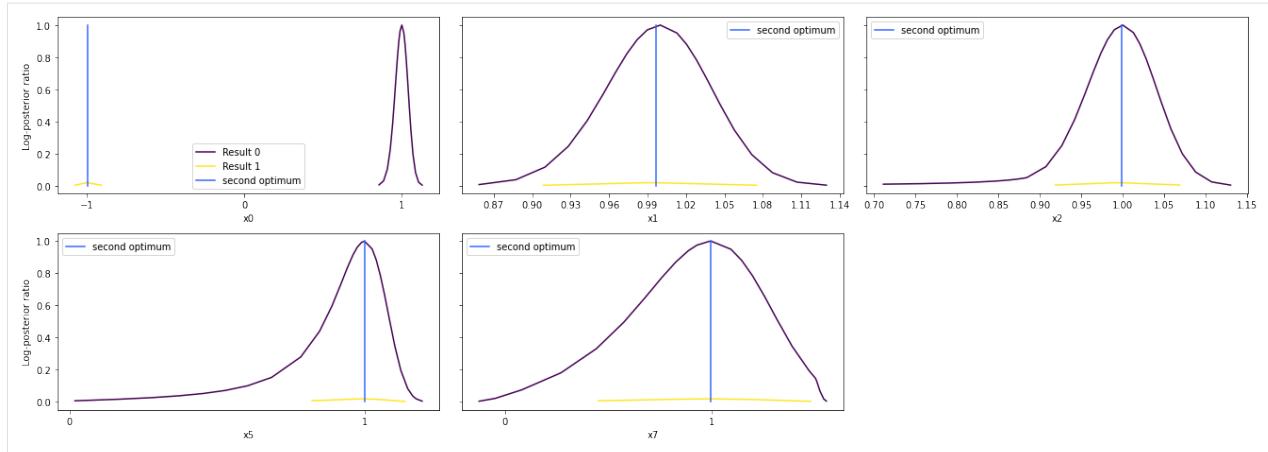

Approximate profiles

When computing the profiles is computationally too demanding, it is possible to employ to at least consider a normal approximation with covariance matrix given by the Hessian or FIM at the optimal parameters.


```
[17]: %%time

result1_tnc = profile.approximate_parameter_profile(
    problem=problem1,
    result=result1_bfgs,
    profile_index=np.array([1, 1, 1, 0, 0, 1, 0, 1, 0, 0, 0]),
    result_index=0,
    n_steps=1000)

CPU times: user 25 ms, sys: 16.3 ms, total: 41.4 ms
Wall time: 24.2 ms
```

These approximate profiles require at most one additional function evaluation, can however yield substantial approximation errors:


```
[18]: axes = visualize.profiles(
    result1_bfgs, profile_indices = [0,1,2,5,7], profile_list_ids=[0, 2],
    ratio_min=0.01, colors=[[1,0,0,1), (0,0,1,1)],
    legends=["Optimization-based profile", "Local profile approximation"])
```

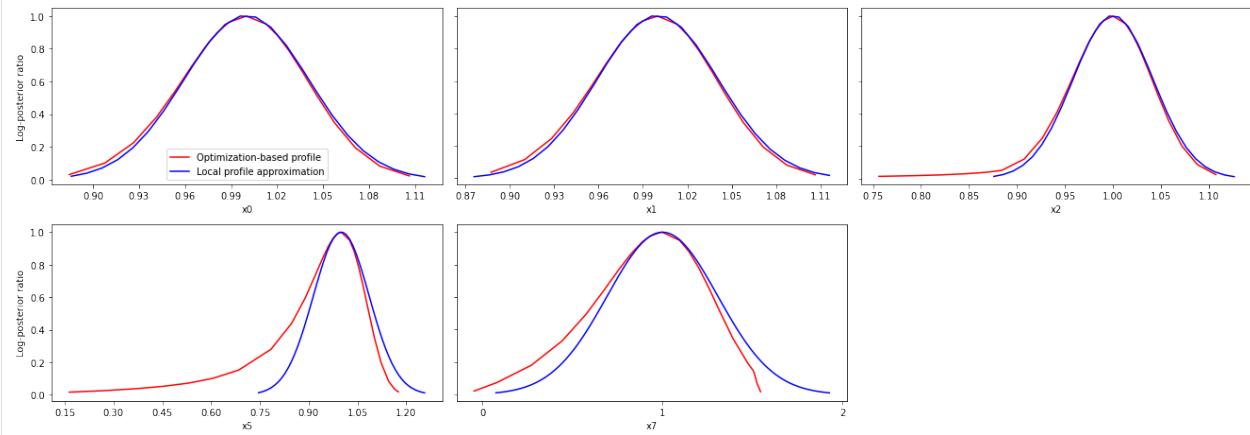

We can also plot approximate confidence intervals based on profiles:

```
[19]: visualize.profile_cis(
    result1_bfgs, confidence_level=0.95, profile_list=2)

[19]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb3bda13f10>
```

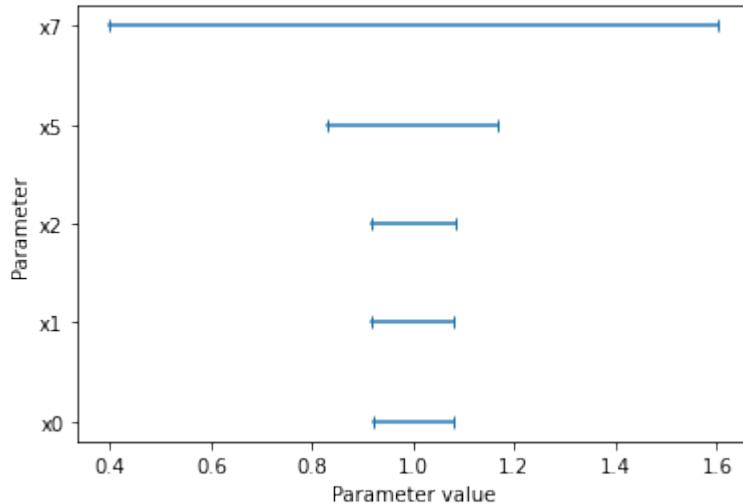

2.2 Conversion reaction

```
[ ]: # install if not done yet
# !apt install libatlas-base-dev swig
# %pip install pypesto[amici] --quiet

[1]: import importlib
import os
import sys
import numpy as np
import amici
import amici.plotting
import pypesto
import pypesto.optimize as optimize
import pypesto.visualize as visualize

# sbml file we want to import
sbml_file = 'conversion_reaction/model_conversion_reaction.xml'
# name of the model that will also be the name of the python module
model_name = 'model_conversion_reaction'
# directory to which the generated model code is written
model_output_dir = 'tmp/' + model_name
```


2.2.1 Compile AMICI model

```
[2]: # import sbml model, compile and generate amici module
sbml_importer = amici.SbmlImporter(sbml_file)
sbml_importer.sbml2amici(model_name,
                        model_output_dir,
                        verbose=False)
```

2.2.2 Load AMICI model

```
[3]: # load amici module (the usual starting point later for the analysis)
sys.path.insert(0, os.path.abspath(model_output_dir))
model_module = importlib.import_module(model_name)
model = model_module.getModel()
model.requireSensitivitiesForAllParameters()
model.setTimepoints(np.linspace(0, 10, 11))
model.setParameterScale(amici.ParameterScaling.log10)
model.setParameters([-0.3, -0.7])
solver = model.getSolver()
solver.setSensitivityMethod(amici.SensitivityMethod.forward)
solver.setSensitivityOrder(amici.SensitivityOrder.first)

# how to run amici now:
rdata = amici.runAmiciSimulation(model, solver, None)
amici.plotting.plotStateTrajectories(rdata)
edata = amici.ExpData(rdata, 0.2, 0.0)
```

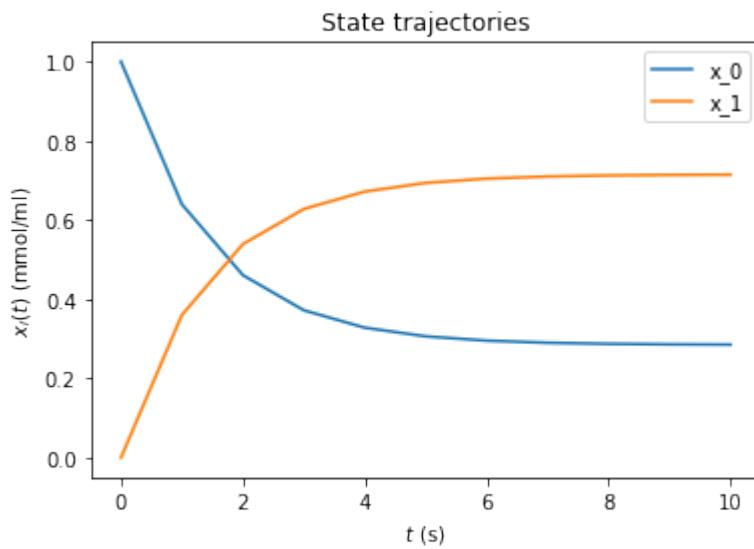

2.2.3 Optimize

```
[4]: # create objective function from amici model
# pesto.AmiciObjective is derived from pesto.Objective,
# the general pesto objective function class
objective = pypesto.AmiciObjective(model, solver, [edata], 1)

# create optimizer object which contains all information for doing the optimization
optimizer = optimize.ScipyOptimizer(method='ls_trf')


# create problem object containing all information on the problem to be solved
problem = pypesto.Problem(objective=objective,
                           lb=[-2,-2], ub=[2,2])


# do the optimization
result = optimize.minimize(problem=problem,
                           optimizer=optimizer,
                           n_starts=10)
```

2.2.4 Visualize

```
[5]: visualize.waterfall(result)
visualize.parameters(result)
visualize.optimizer_convergence(result)

[5]: <AxesSubplot:xlabel='fval', ylabel='gradient norm'>
```

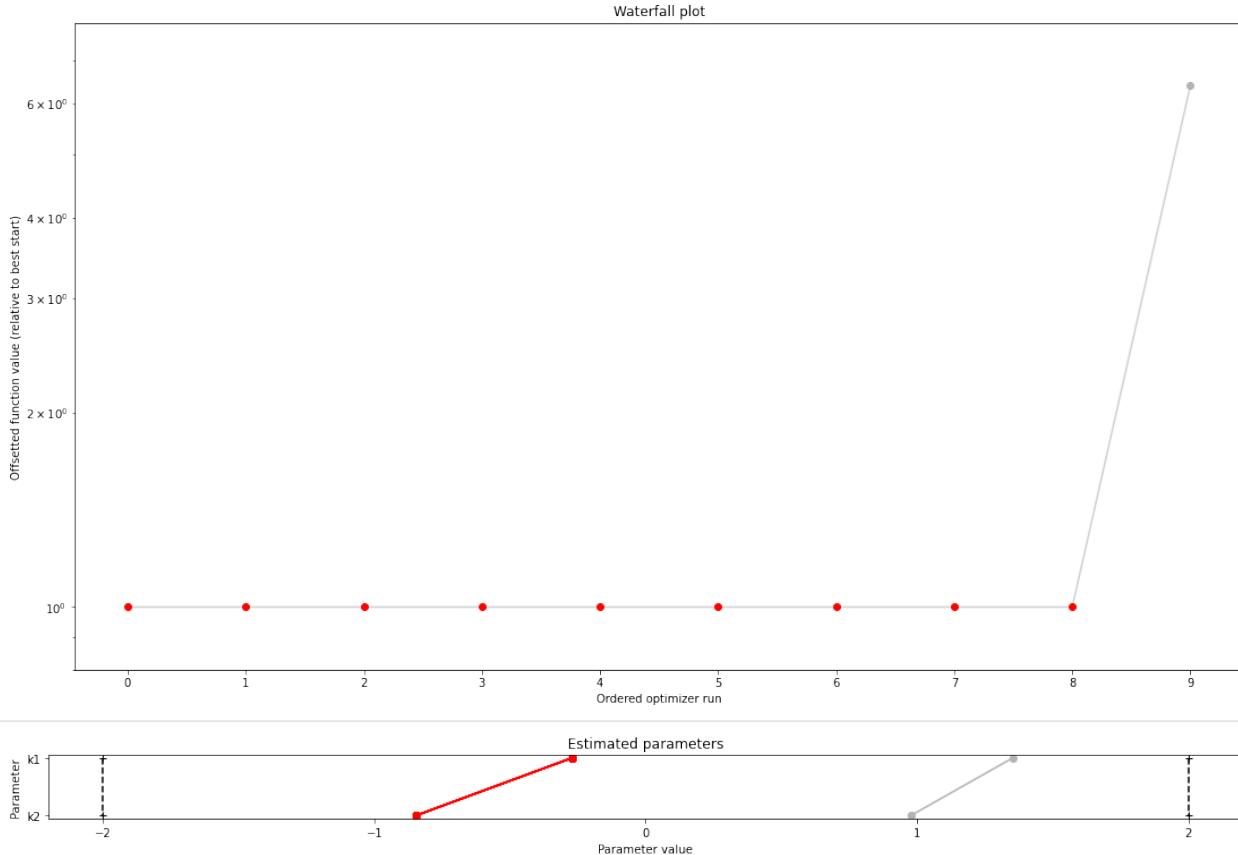

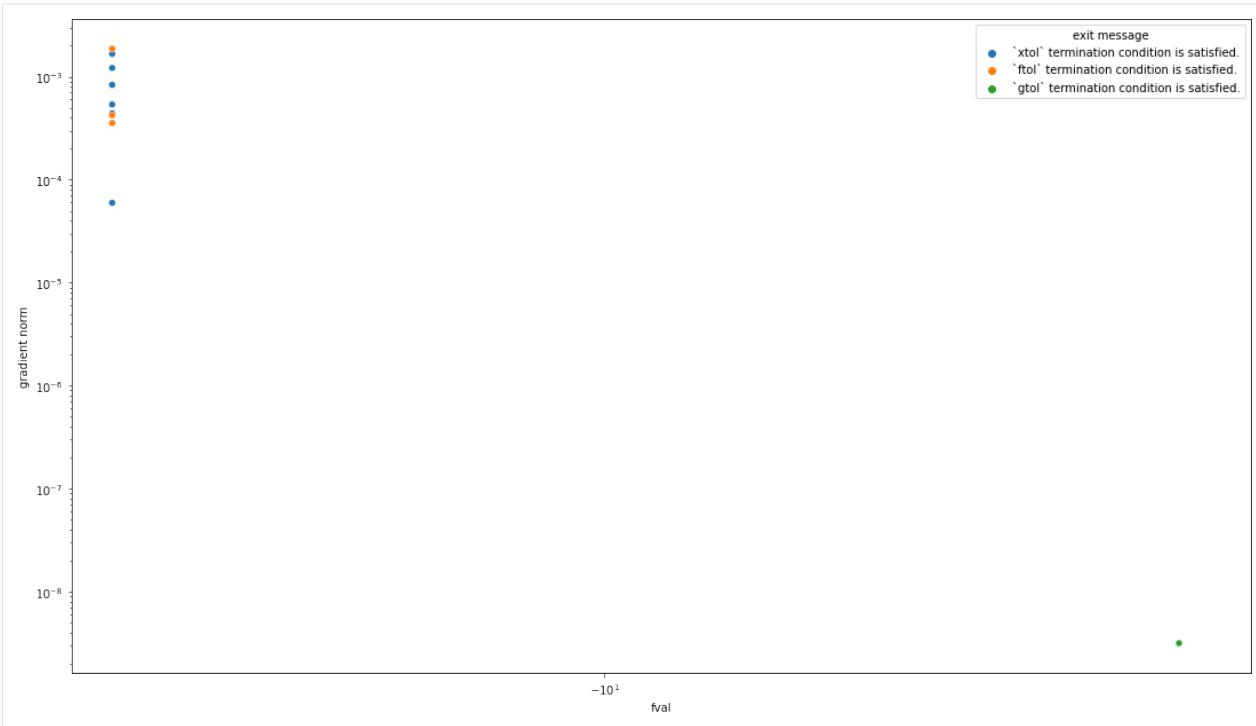

2.2.5 Profiles


```
[6]: import pypesto.profile as profile

profile_options = profile.ProfileOptions(min_step_size=0.0005,
                                         delta_ratio_max=0.05,
                                         default_step_size=0.005,
                                         ratio_min=0.01)

result = profile.parameter_profile(
    problem=problem,
    result=result,
    optimizer=optimizer,
    profile_index=np.array([1, 1, 1, 0, 0, 1, 0, 1, 0, 0, 0]),
    result_index=0,
    profile_options=profile_options)

Parameters obtained from history and optimizer do not match: [-0.17103023], [-0.
˓→17102486]
Parameters obtained from history and optimizer do not match: [-0.92272262], [-0.
˓→92270649]
```

```
[7]: # specify the parameters, for which profiles should be computed
ax = visualize.profiles(result)
```

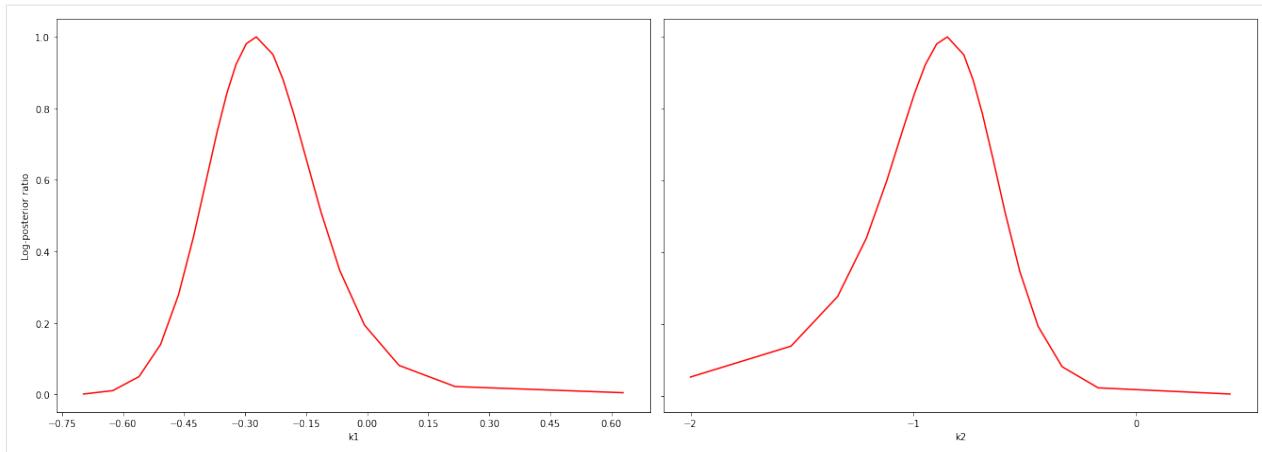

2.2.6 Sampling


```
[8]: import pypesto.sample as sample

sampler = sample.AdaptiveParallelTemperingSampler(
    internal_sampler=sample.AdaptiveMetropolisSampler(),
    n_chains=3)

result = sample.sample(problem, n_samples=10000, sampler=sampler, result=result)
100%|| 10000/10000 [00:33<00:00, 295.74it/s]
```

```
[9]: ax = visualize.sampling_scatter(result, size=[13, 6])

Burn in index not found in the results, the full chain will be shown.
You may want to use, e.g., 'pypesto.sample.geweke_test'.
```

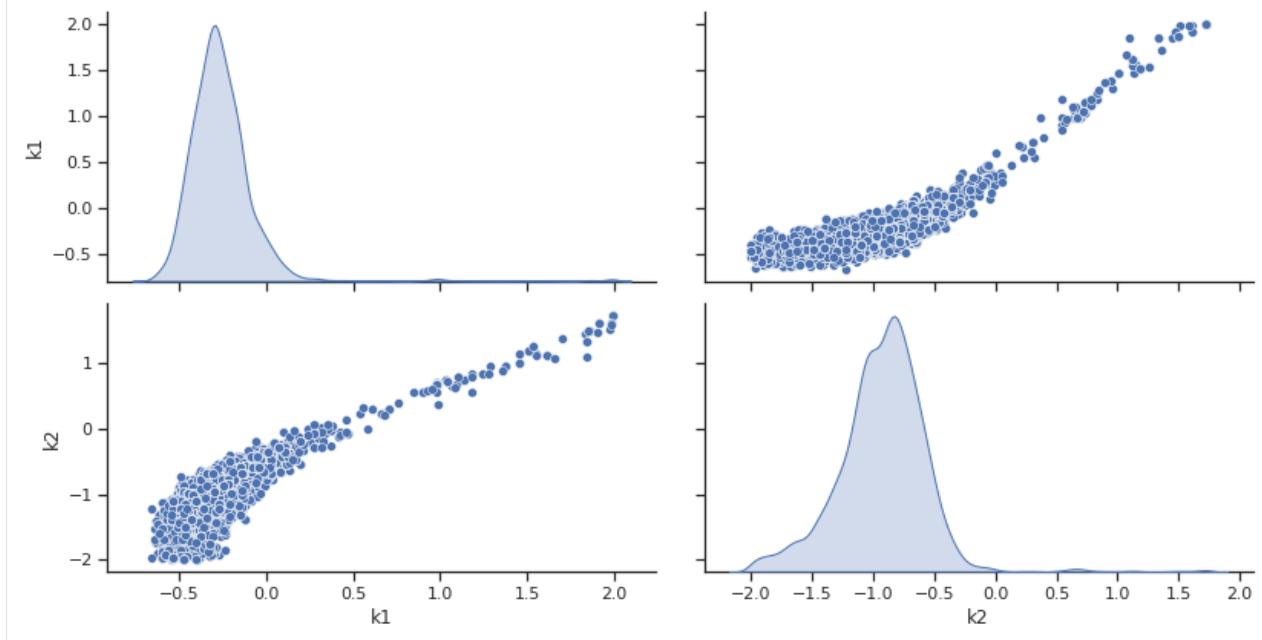

2.2.7 Predict

```
[10]: # Let's create a function, which predicts the ratio of x_1 and x_0
import pypesto.predict as predict

def ratio_function(amici_output_list):
    # This (optional) function post-processes the results from AMICI and must accept
    # one input:
    # a list of dicts, with the fields t, x, y[, sx, sy - if sensi_orders includes 1]
    # We need to specify the simulation condition: here, we only have one, i.e., it's
    # [0]
    x = amici_output_list[0]['x']
    ratio = x[:,1] / x[:,0]
    # we need to output also at least one simulation condition
    return [ratio]

# create pypesto prediction function
predictor = predict.AmiciPredictor(objective, post_processor=ratio_function, output_
    #ids=['ratio'])

# run prediction
prediction = predictor(x=model.getUnscaledParameters())
```

```
[11]: dict(prediction)

[11]: {'conditions': [{'timepoints': array([ 0.,  1.,  2.,  3.,  4.,  5.,  6.,  7.,  8.,  9.,
   10.]),
  'output_ids': ['ratio'],
  'x_names': ['k1', 'k2'],
  'output': array([0.          , 1.95196396, 2.00246152, 2.00290412, 2.00290796,
   2.00290801, 2.00290801, 2.00290799, 2.002908  , 2.00290801,
   2.002908  ]),
  'output_sensi': None}],
 'condition_ids': ['condition_0'],
 'comment': None,
 'parameter_ids': ['k1', 'k2']}
```

2.2.8 Analyze parameter ensembles

```
[12]: # We want to use the sample result to create a prediction
from pypesto.ensemble import ensemble

# first collect some vectors from the sampling result
vectors = result.sample_result.trace_x[0, ::20, :]

# create the collection
my_ensemble = ensemble.Ensemble(vectors,
                                 x_names=problem.x_names,
                                 ensemble_type=ensemble.EnsembleType.sample,
                                 lower_bound=problem.lb,
                                 upper_bound=problem.ub)

# we can also perform an approximative identifiability analysis
summary = my_ensemble.compute_summary()
identifiability = my_ensemble.check_identifiability()
print(identifiability.transpose())
```

parameterId	k1	k2
parameterId	k1	k2
lowerBound	-2	-2
upperBound	2	2
ensemble_mean	-0.559689	-0.810604
ensemble_std	0.287255	0.364753
ensemble_median	-0.559689	-0.810604
within lb: 1 std	True	True
within ub: 1 std	True	True
within lb: 2 std	True	True
within ub: 2 std	True	True
within lb: 3 std	True	True
within ub: 3 std	True	True
within lb: perc 5	True	True
within lb: perc 20	True	True
within ub: perc 80	True	True
within ub: perc 95	True	True

```
[13]: # run a prediction
ensemble_prediction = my_ensemble.predict(predictor, prediction_id='ratio_over_time')

# go for some analysis
prediction_summary = ensemble_prediction.compute_summary(percentiles_list=(1, 5, 10,
→25, 75, 90, 95, 99))
dict(prediction_summary)

[13]: {'mean': <pypesto.predict.result.PredictionResult at 0x7fe734b68760>,
'std': <pypesto.predict.result.PredictionResult at 0x7fe734b698b0>,
'median': <pypesto.predict.result.PredictionResult at 0x7fe734b69d60>,
'percentile 1': <pypesto.predict.result.PredictionResult at 0x7fe734b69a30>,
'percentile 5': <pypesto.predict.result.PredictionResult at 0x7fe734b69a60>,
'percentile 10': <pypesto.predict.result.PredictionResult at 0x7fe734b69640>,
'percentile 25': <pypesto.predict.result.PredictionResult at 0x7fe734b69610>,
'percentile 75': <pypesto.predict.result.PredictionResult at 0x7fe734b693d0>,
'percentile 90': <pypesto.predict.result.PredictionResult at 0x7fe734b69e20>,
'percentile 95': <pypesto.predict.result.PredictionResult at 0x7fe734b692e0>,
'percentile 99': <pypesto.predict.result.PredictionResult at 0x7fe734b69730>}
```

2.3 Fixed parameters

In this notebook we will show how to use fixed parameters. Therefore, we employ our Rosenbrock example. We define two problems, where for the first problem all parameters are optimized, and for the second we fix some of them to specified values.

```
[ ]: # install if not done yet
# %pip install pypesto --quiet
```

2.3.1 Define problem

```
[1]: import pypesto
import pypesto.optimize as optimize
import pypesto.visualize as visualize
import numpy as np
import scipy as sp
import matplotlib.pyplot as plt

%matplotlib inline
```



```
[2]: objective = pypesto.Objective(fun=sp.optimize.rosen,
                                    grad=sp.optimize.rosen_der,
                                    hess=sp.optimize.rosen_hess)

dim_full = 5
lb = -2 * np.ones((dim_full,1))
ub = 2 * np.ones((dim_full,1))

problem1 = pypesto.Problem(objective=objective, lb=lb, ub=ub)

x_fixed_indices = [1, 3]
x_fixed_vals = [1, 1]
problem2 = pypesto.Problem(objective=objective, lb=lb, ub=ub,
                            x_fixed_indices=x_fixed_indices,
                            x_fixed_vals=x_fixed_vals)
```

2.3.2 Optimize


```
[3]: optimizer = optimize.ScipyOptimizer()
n_starts = 10

result1 = optimize.minimize(problem=problem1, optimizer=optimizer,
                            n_starts=n_starts)
result2 = optimize.minimize(problem=problem2, optimizer=optimizer,
                            n_starts=n_starts)
```

2.3.3 Visualize

```
[4]: fig, ax = plt.subplots()
visualize.waterfall(result1, ax)
visualize.waterfall(result2, ax)
visualize.parameters(result1)
visualize.parameters(result2)
visualize.parameters(result2, parameter_indices='all')

[4]: <matplotlib.axes._subplots.AxesSubplot at 0x7ff3da236a20>
```

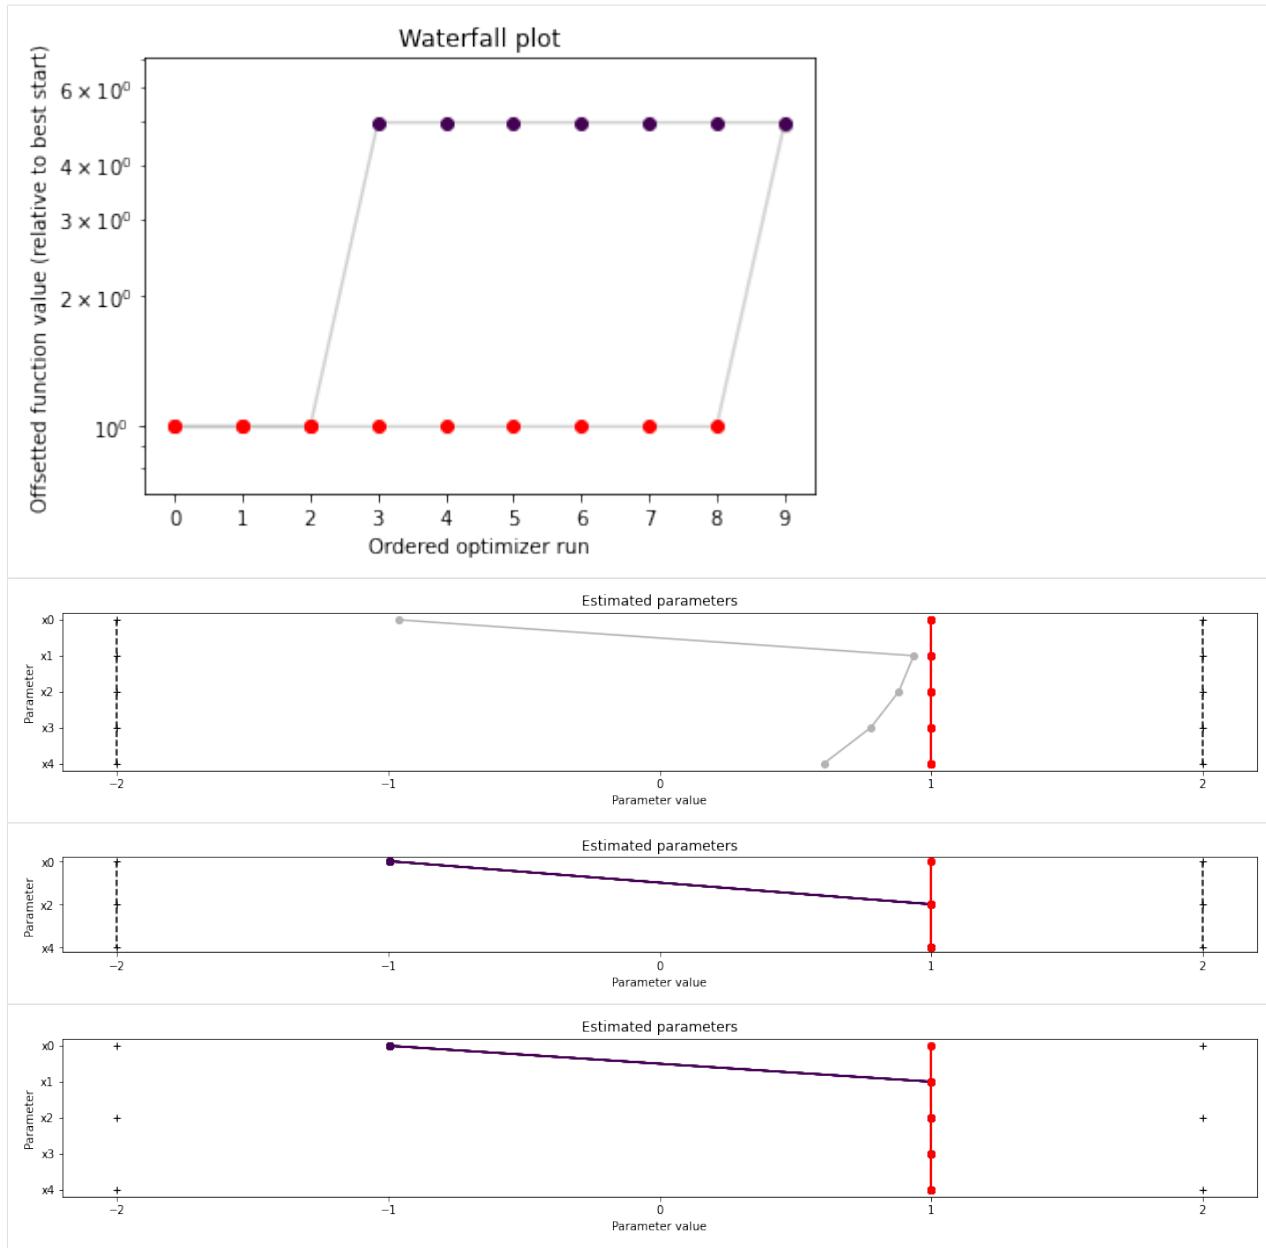

```
[5]: result1.optimize_result.as_dataframe(['fval', 'x', 'grad'])
```

```
[5]:
```

	fval	x \
0	2.563931e-14	[0.9999999859217336, 0.9999999812160436, 0.999...
1	4.103854e-14	[1.0000000033181213, 1.00000001070042, 1.00000...
2	2.430040e-13	[0.9999999979980921, 0.9999999872750013, 0.999...
3	2.993261e-12	[1.0000000655628785, 1.0000002137366326, 1.000...
4	3.028019e-11	[1.0000002263273202, 0.9999999457510741, 1.000...
5	1.504857e-10	[1.0000008747306284, 1.000001813929941, 1.0000...
6	3.713657e-10	[1.0000011952242212, 1.000001771893066, 1.0000...
7	4.012393e-10	[0.9999986079063197, 0.9999988670990364, 0.999...
8	5.247717e-10	[1.000000368254703, 1.0000009022274876, 0.9999...
9	3.930839e+00	[-0.9620510415103535, 0.9357394330313418, 0.88...

(continues on next page)

(continued from previous page)

```
grad
0 [-3.7771869883630873e-06, 3.2004378806360524e-...
1 [-1.6190347383411735e-06, 5.768553691118231e-0...
2 [3.4844693764909735e-06, 4.6873211372756083e-0...
3 [-3.291322500031286e-05, 6.600823794056182e-07...
4 [0.00020321414758544783, -0.000184783444508992...
5 [-2.4037728901340504e-05, -1.168240814877157e-...
6 [0.00024981346612303615, 0.0001962351003382311...
7 [-0.000663297051531534, 0.000537723456872972, ...
8 [-6.555069341760695e-05, 0.0009407121705420637...
9 [-1.109923131625834e-06, 5.109232684041842e-06...]
```

```
[6]: result2.optimize_result.as_dataframe(['fval', 'x', 'grad'])
```

	fval	x	\
0	4.679771e-17	[0.9999999998641961, 1.0, 1.0000000002266116, ...]	
1	4.825331e-16	[0.9999999995848748, 1.0, 0.999999991941183, ...]	
2	1.394704e-14	[1.0000000026325193, 1.0, 0.999999987812758, ...]	
3	3.989975e+00	[-0.9949747468838975, 1.0, 0.999999999585671,...]	
4	3.989975e+00	[-0.9949747461383964, 1.0, 0.999999963588824,...]	
5	3.989975e+00	[-0.9949747436177196, 1.0, 0.9999999894437084,...]	
6	3.989975e+00	[-0.9949747458936441, 1.0, 0.99999997533737, 1...]	
7	3.989975e+00	[-0.9949747793023977, 1.0, 1.000000023888003, ...]	
8	3.989975e+00	[-0.9949748033666262, 1.0, 1.0000000080319777,...]	
9	3.989975e+00	[-0.994974648260114, 1.0, 0.9999999725753793, ...]	

	grad
0	[-1.0891474676223493e-07, nan, 2.2706484163692...]
1	[-3.329303753527845e-07, nan, -8.0749345757971...]
2	[2.1112804950914665e-06, nan, -1.2211616799204...]
3	[-4.2116658605095836e-08, nan, -4.151572285811...]
4	[5.468066182068299e-07, nan, -3.64839985427999...]
5	[2.5380648831507813e-06, nan, -1.0577404068293...]
6	[7.40153570877311e-07, nan, -2.471195460075688...]
7	[-2.5651750697797127e-05, nan, 2.3935779637870...]
8	[-4.466176453288284e-05, nan, 8.0480417566767e...]
9	[7.78676721049365e-05, nan, -2.747946901432181...]

2.4 AMICI Python example “Boehm”

This is an example using the “boehm_ProteomeRes2014.xml” model to demonstrate and test SBML import and AMICI Python interface.

```
[ ]: # install if not done yet
# !apt install libatlas-base-dev swig
# %pip install pypesto[amici] --quiet
```

```
[1]: import libsbml
import importlib
import amici
import pypesto
import os
import sys
import numpy as np
```

(continues on next page)

(continued from previous page)

```

import matplotlib.pyplot as plt

# temporarily add the simulate file
sys.path.insert(0, 'boehm_JProteomeRes2014')

from benchmark_import import DataProvider

# sbml file
sbml_file = 'boehm_JProteomeRes2014/boehm_JProteomeRes2014.xml'

# name of the model that will also be the name of the python module
model_name = 'boehm_JProteomeRes2014'

# output directory
model_output_dir = 'tmp/' + model_name

```

2.4.1 The example model

Here we use libsbml to show the reactions and species described by the model (this is independent of AMICI).

```

[2]: sbml_reader = libsbml.SBMLReader()
sbml_doc = sbml_reader.readSBML(os.path.abspath(sbml_file))
sbml_model = sbml_doc.getModel()
dir(sbml_doc)
print(os.path.abspath(sbml_file))
print('Species: ', [s.getId() for s in sbml_model.getListOfSpecies()])

```



```

print('\nReactions:')
for reaction in sbml_model.getListOfReactions():
    reactants = ' + '.join([
        '%s %s' % (int(r.getStoichiometry()), r.getSpecies())
        if r.getStoichiometry() > 1 else '',
        for r in reaction.getListOfReactants()])
    products = ' + '.join([
        '%s %s' % (int(r.getStoichiometry()), r.getSpecies())
        if r.getStoichiometry() > 1 else '',
        for r in reaction.getListOfProducts()])
    reversible = '<' if reaction.getReversible() else ''
    print('%3s: %10s %1s->%10s\t\t[%s]' %
          (reaction.getId(),
           reactants,
           reversible,
           products,
           libsbml.formulaToL3String(reaction.getKineticLaw().getMath())))

```



```

/home/yannik/pypesto/doc/example/boehm_JProteomeRes2014/boehm_JProteomeRes2014.xml
Species: ['STAT5A', 'STAT5B', 'pApB', 'pApA', 'pBpB', 'nucpApA', 'nucpApB', 'nucpBpB
          ']

Reactions:
v1_v_0: 2 STAT5A -> pApA [cyt * BaF3_Epo * STAT5A^2 * k_phos]
v2_v_1: STAT5A + STAT5B -> pApB [cyt * BaF3_Epo * STAT5A *_
          STAT5B * k_phos]
v3_v_2: 2 STAT5B -> pBpB [cyt * BaF3_Epo * STAT5B^2 * k_phos]

```

(continues on next page)

(continued from previous page)

v4_v_3:	pApA	->	nucpApA	[cyt * k_imp_homo * pApA]
v5_v_4:	pApB	->	nucpApB	[cyt * k_imp_hetero * pApB]
v6_v_5:	pBpB	->	nucpBpB	[cyt * k_imp_homo * pBpB]
v7_v_6:	nucpApA	->	2 STAT5A	[nuc * k_exp_homo * nucpApA]
v8_v_7:	nucpApB	->	STAT5A + STAT5B	[nuc * k_exp_hetero * nucpApB]
v9_v_8:	nucpBpB	->	2 STAT5B	[nuc * k_exp_homo * nucpBpB]

2.4.2 Importing an SBML model, compiling and generating an AMICI module

Before we can use AMICI to simulate our model, the SBML model needs to be translated to C++ code. This is done by `amici.SbmlImporter`.

```
[3]: # Create an SbmlImporter instance for our SBML model
sbml_importer = amici.SbmlImporter(sbml_file)
```

In this example, we want to specify fixed parameters, observables and a σ parameter. Unfortunately, the latter two are not part of the [SBML standard](#). However, they can be provided to `amici.SbmlImporter.sbml2amici` as demonstrated in the following.

Constant parameters

Constant parameters, i.e. parameters with respect to which no sensitivities are to be computed (these are often parameters specifying a certain experimental condition) are provided as a list of parameter names.

```
[4]: constantParameters = ['ratio', 'specC17']
```

Observables

We used SBML's `AssignmentRule <http://sbml.org/Software/libSBML/5.13.0/docs//python-api/classlibsbml_1_1_rule.html>`__ as a non-standard way to specify *Model outputs* within the SBML file. These rules need to be removed prior to the model import (AMICI does at this time not support these Rules). This can be easily done using `amici.assignmentRules2observables()`.

In this example, we introduced parameters named `observable_*` as targets of the observable AssignmentRules. Where applicable we have `observable_*_sigma` parameters for σ parameters (see below).

```
[5]: # Retrieve model output names and formulae from AssignmentRules and remove the
# respective rules
observables = amici.assignmentRules2observables(
    sbml_importer.sbml, # the libsbml model object
    filter_function=lambda variable: variable.getId().startswith('observable_') #
    and not variable.getId().endswith('_sigma')
)
print('Observables:', observables)

Observables: {'observable_pSTAT5A_rel': {'name': 'observable_pSTAT5A_rel', 'formula': '#(100 * pApB + 200 * pApA * specC17) / (pApB + STAT5A * specC17 + 2 * pApA * specC17)'}, 'observable_pSTAT5B_rel': {'name': 'observable_pSTAT5B_rel', 'formula': '#-(100 * pApB - 200 * pBpB * (specC17 - 1)) / (STAT5B * (specC17 - 1) - pApB + 2 * pBpB * (specC17 - 1))'}, 'observable_rSTAT5A_rel': {'name': 'observable_rSTAT5A_rel', 'formula': '#(100 * pApB + 100 * STAT5A * specC17 + 200 * pApA * specC17) / (2 * pApB + STAT5A * specC17 + 2 * pApA * specC17 - STAT5B * (specC17 - 1) - 2 * pBpB * (specC17 - 1))'}}
```

σ parameters

To specify measurement noise as a parameter, we simply provide a dictionary with (preexisting) parameter names as keys and a list of observable names as values to indicate which sigma parameter is to be used for which observable.

```
[6]: sigma_vals = ['sd_pSTAT5A_rel', 'sd_pSTAT5B_rel', 'sd_rSTAT5A_rel']
observable_names = observables.keys()
sigmas = dict(zip(list(observable_names), sigma_vals))
print(sigmas)

{'observable_pSTAT5A_rel': 'sd_pSTAT5A_rel', 'observable_pSTAT5B_rel': 'sd_pSTAT5B_rel',
 'observable_rSTAT5A_rel': 'sd_rSTAT5A_rel'}
```

Generating the module

Now we can generate the python module for our model. `amici.SbmlImporter.sbml2amici` will symbolically derive the sensitivity equations, generate C++ code for model simulation, and assemble the python module.

```
[7]: sbml_importer.sbml2amici(model_name,
                           model_output_dir,
                           verbose=False,
                           observables=observables,
                           constantParameters=constantParameters,
                           sigmas=sigmas,
                           )
```

Importing the module and loading the model

If everything went well, we need to add the previously selected model output directory to our `PYTHON_PATH` and are then ready to load newly generated model:

```
[8]: sys.path.insert(0, os.path.abspath(model_output_dir))
model_module = importlib.import_module(model_name)
```

And get an instance of our model from which we can retrieve information such as parameter names:

```
[9]: model = model_module.getModel()

print("Model parameters:", list(model.getParameterIds()))
print("Model outputs: ", list(model.getObservableIds()))
print("Model states:  ", list(model.getStateIds()))

Model parameters: ['Epo_degradation_BaF3', 'k_exp_hetero', 'k_exp_homo', 'k_imp_hetero',
                   'k_imp_homo', 'k_phos', 'sd_pSTAT5A_rel', 'sd_pSTAT5B_rel', 'sd_rSTAT5A_rel']
Model outputs:   ['observable_pSTAT5A_rel', 'observable_pSTAT5B_rel', 'observable_rSTAT5A_rel']
Model states:    ['STAT5A', 'STAT5B', 'pApB', 'pApA', 'pBpB', 'nucpApA', 'nucpApB',
                  'nucpBpB']
```

2.4.3 Running simulations and analyzing results

After importing the model, we can run simulations using `amici.runAmiciSimulation`. This requires a `Model` instance and a `Solver` instance. Optionally you can provide measurements inside an `ExpData` instance, as shown later in this notebook.

```
[10]: h5_file = 'boehm_JProteomeRes2014/data_boehm_JProteomeRes2014.h5'
dp = DataProvider(h5_file)

[11]: # set timepoints for which we want to simulate the model
timepoints = amici.DoubleVector(dp.get_timepoints())
model.setTimepoints(timepoints)

# set fixed parameters for which we want to simulate the model
model.setFixedParameters(amici.DoubleVector(np.array([0.693, 0.107])))

# set parameters to optimal values found in the benchmark collection
model.setParameterScale(2)
model.setParameters(amici.DoubleVector(np.array(
    [-1.568917588,
     -4.999704894,
     -2.209698782,
     -1.786006548,
     4.990114009,
     4.197735488,
     0.585755271,
     0.818982819,
     0.498684404,
    ]
)))
# Create solver instance
solver = model.getSolver()

# Run simulation using model parameters from the benchmark collection and default
# solver options
rdata = amici.runAmiciSimulation(model, solver)

[12]: # Create edata
edata = amici.ExpData(rdata, 1.0, 0)

# set observed data
edata.setObservedData(amici.DoubleVector(dp.get_measurements()[0][:, 0]), 0)
edata.setObservedData(amici.DoubleVector(dp.get_measurements()[0][:, 1]), 1)
edata.setObservedData(amici.DoubleVector(dp.get_measurements()[0][:, 2]), 2)

# set standard deviations to optimal values found in the benchmark collection
edata.setObservedDataStdDev(amici.DoubleVector(np.array(16*[10**0.585755271])), 0)
edata.setObservedDataStdDev(amici.DoubleVector(np.array(16*[10**0.818982819])), 1)
edata.setObservedDataStdDev(amici.DoubleVector(np.array(16*[10**0.498684404])), 2)

[13]: rdata = amici.runAmiciSimulation(model, solver, edata)

print('Chi2 value reported in benchmark collection: 47.9765479')
print('chi2 value using AMICI:')
print(rdata['chi2'])
```

```
Chi2 value reported in benchmark collection: 47.9765479
chi2 value using AMICI:
47.97654321200259
```

2.4.4 Run optimization using pyPESTO

```
[14]: # create objective function from amici model
# pesto.AmiciObjective is derived from pesto.Objective,
# the general pesto objective function class

model.requireSensitivitiesForAllParameters()

solver.setSensitivityMethod(amici.SensitivityMethod_forward)
solver.setSensitivityOrder(amici.SensitivityOrder_first)

objective = pypesto.AmiciObjective(model, solver, [edata], 1)

[15]: import pypesto.optimize as optimize

# create optimizer object which contains all information for doing the optimization
optimizer = optimize.ScipyOptimizer()

optimizer.solver = 'bfsgs'

[16]: # create problem object containing all information on the problem to be solved
x_names = ['x' + str(j) for j in range(0, 9)]
problem = pypesto.Problem(objective=objective,
                           lb=-5*np.ones((9)), ub=5*np.ones((9)),
                           x_names=x_names)

[17]: # do the optimization
result = optimize.minimize(problem=problem,
                           optimizer=optimizer,
                           n_starts=10) # 200

0% | 0/10 [00:00<?, ?it/s] [Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI_
    ↵ERROR: in module CVODES in function CVode : At t = 27.1575 and h = 3.02895e-06, the_
    ↵error test failed repeatedly or with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 27.157468:
AMICI failed to integrate the forward problem

[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function_
    ↵CVode : At t = 27.1575 and h = 3.02895e-06, the error test failed repeatedly or_
    ↵with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 27.157468:
AMICI failed to integrate the forward problem

[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function_
    ↵CVode : At t = 27.1575 and h = 3.02895e-06, the error test failed repeatedly or_
    ↵with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 27.157468:
AMICI failed to integrate the forward problem
```

(continues on next page)

(continued from previous page)

```
20% | 2/10 [00:04<00:16, 2.01s/it] [Warning] AMICI:CVODES:CVode:ERR_FAILURE:  
↳ AMICI ERROR: in module CVODES in function CVode : At t = 198.1 and h = 2.52411e-05,  
↳ the error test failed repeatedly or with |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 198.099706:  
AMICI failed to integrate the forward problem  
  
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function  
↳ CVode : At t = 197.924 and h = 2.91098e-05, the error test failed repeatedly or  
↳ with |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 197.924166:  
AMICI failed to integrate the forward problem  
  
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function  
↳ CVode : At t = 197.924 and h = 2.91098e-05, the error test failed repeatedly or  
↳ with |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 197.924166:  
AMICI failed to integrate the forward problem  
  
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function  
↳ CVode : At t = 197.924 and h = 2.91098e-05, the error test failed repeatedly or  
↳ with |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 197.924166:  
AMICI failed to integrate the forward problem  
  
30% | 3/10 [00:05<00:13, 1.92s/it] [Warning] AMICI:CVODES:CVode:ERR_FAILURE:  
↳ AMICI ERROR: in module CVODES in function CVode : At t = 125.014 and h = 1.7682e-05,  
↳ the error test failed repeatedly or with |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 125.014377:  
AMICI failed to integrate the forward problem  
  
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function  
↳ CVode : At t = 125.014 and h = 1.7682e-05, the error test failed repeatedly or with  
↳ |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 125.014377:  
AMICI failed to integrate the forward problem  
  
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function  
↳ CVode : At t = 125.014 and h = 1.7682e-05, the error test failed repeatedly or with  
↳ |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 125.014377:  
AMICI failed to integrate the forward problem  
  
50% | 5/10 [00:08<00:08, 1.74s/it] [Warning] AMICI:CVODES:CVode:ERR_FAILURE:  
↳ AMICI ERROR: in module CVODES in function CVode : At t = 162.24 and h = 3.05789e-06,  
↳ the error test failed repeatedly or with |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 162.239689:  
AMICI failed to integrate the forward problem  
  
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function  
↳ CVode : At t = 162.24 and h = 3.05789e-06, the error test failed repeatedly or with  
↳ |h| = hmin.  
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 162.239689:  
AMICI failed to integrate the forward problem  
  
70% | 7/10 [00:18<00:08, 2.96s/it] [Warning] AMICI:CVODES:CVode:ERR_FAILURE:  
↳ AMICI ERROR: in module CVODES in function CVode : At t = 25.5245 and h = 5.70238e-  
↳ 06, the error test failed repeatedly or with |h| = hmin.
```

(continues on next page)

(continued from previous page)

```
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 25.524541:
AMICI failed to integrate the forward problem

[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
CVode : At t = 25.5245 and h = 5.70238e-06, the error test failed repeatedly or
with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 25.524541:
AMICI failed to integrate the forward problem

100%|| 10/10 [00:23<00:00, 2.37s/it]
```


2.4.5 Visualization


Create waterfall and parameter plot

```
[18]: # waterfall, parameter space,
import pypesto.visualize as visualize

visualize.waterfall(result)
visualize.parameters(result)

[18]: <AxesSubplot:title={'center':'Estimated parameters'}, xlabel='Parameter value',
ylabel='Parameter'>
```

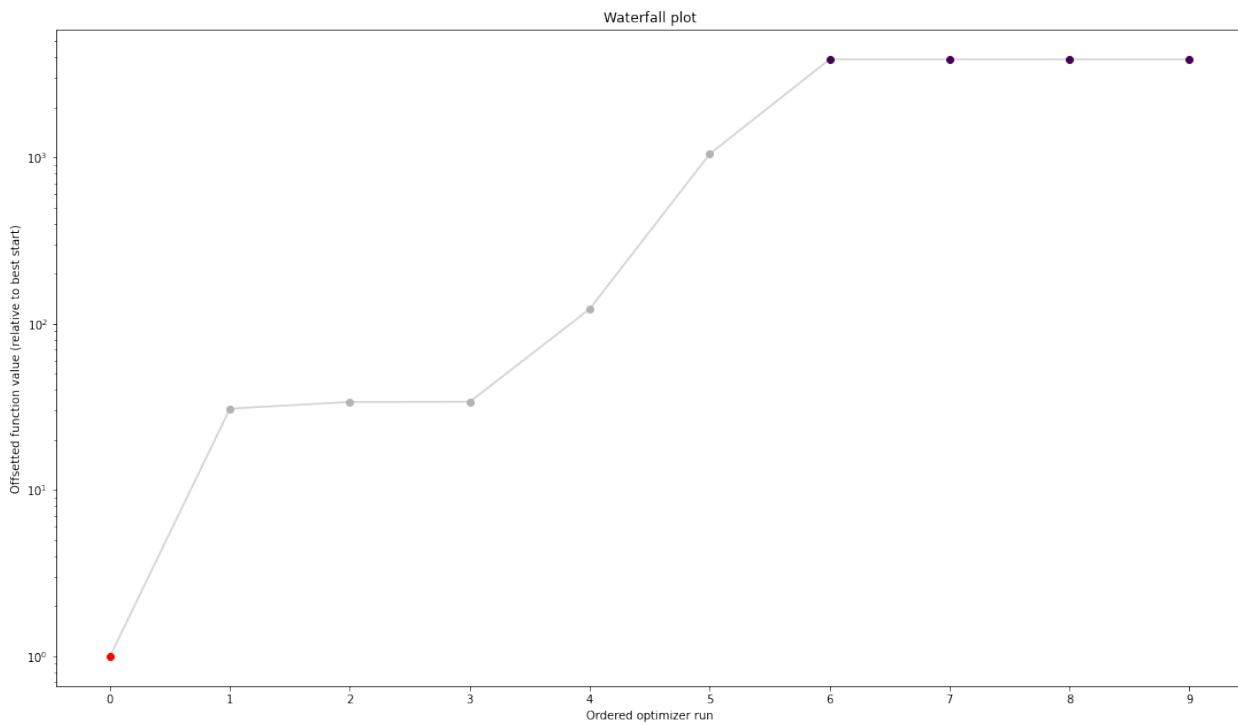

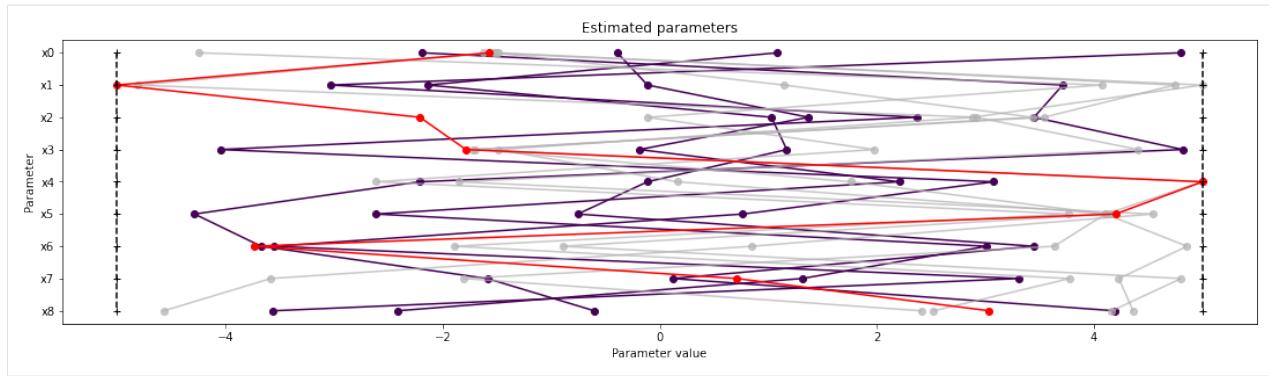

2.5 Model import using the Petab format

In this notebook, we illustrate how to use `pyPESTO` together with `PEtab` and `AMICI`. We employ models from the [benchmark collection](#), which we first download:

```
[ ]: # install if not done yet
# !apt install libatlas-base-dev swig
# %pip install pypesto[amici,petab] --quiet

[1]: import pypesto
import pypesto.petab
import pypesto.optimize as optimize
import pypesto.visualize as visualize
import amici
import petab

import os
import numpy as np
import matplotlib.pyplot as plt

%matplotlib inline

!git clone --depth 1 https://github.com/Benchmarking-Initiative/Benchmark-Models-
 ↵PEtab.git tmp/benchmark-models || (cd tmp/benchmark-models && git pull)

folder_base = "tmp/benchmark-models/Benchmark-Models/"

fatal: destination path 'tmp/benchmark-models' already exists and is not an empty directory.
Already up to date.
```

2.5.1 Import

Manage PEtab model

A PEtab problem comprises all the information on the model, the data and the parameters to perform parameter estimation. We import a model as a `petab.Problem`.

```
[2]: # a collection of models that can be simulated

#model_name = "Zheng_PNAS2012"
model_name = "Boehm_JProteomeRes2014"
#model_name = "Fujita_SciSignal2010"
#model_name = "Sneyd_PNAS2002"
#model_name = "Borghans_BiophysChem1997"
#model_name = "Elowitz_Nature2000"
#model_name = "Crauste_CellSystems2017"
#model_name = "Lucarelli_CellSystems2018"
#model_name = "Schwen_PONE2014"
#model_name = "Blasi_CellSystems2016"

# the yaml configuration file links to all needed files
yaml_config = os.path.join(folder_base, model_name, model_name + '.yaml')

# create a petab problem
petab_problem = petab.Problem.from_yaml(yaml_config)
```

Import model to AMICI

The model must be imported to pyPESTO and AMICI. Therefore, we create a `pypesto.PetabImporter` from the problem, and create an AMICI model.

```
[3]: importer = pypesto.petab.PetabImporter(petab_problem)

model = importer.create_model()

# some model properties
print("Model parameters:", list(model.getParameterIds()), '\n')
print("Model const parameters:", list(model.getFixedParameterIds()), '\n')
print("Model outputs: ", list(model.getObservableIds()), '\n')
print("Model states: ", list(model.getStateIds()), '\n')

Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
↳pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.

Model parameters: ['Epo_degradation_BaF3', 'k_exp_hetero', 'k_exp_homo', 'k_imp_hetero
↳', 'k_imp_homo', 'k_phos', 'ratio', 'specC17', 'noiseParameter1_pSTAT5A_rel',
↳'noiseParameter1_pSTAT5B_rel', 'noiseParameter1_rSTAT5A_rel']

Model const parameters: []

Model outputs: ['pSTAT5A_rel', 'pSTAT5B_rel', 'rSTAT5A_rel']

Model states: ['STAT5A', 'STAT5B', 'pApB', 'pApA', 'pBpB', 'nucpApA', 'nucpApB',
↳'nucpBpB']
```

Create objective function

To perform parameter estimation, we need to define an objective function, which integrates the model, data, and noise model defined in the PEtab problem.

```
[4]: import libsbml
converter_config = libsbml.SBMLLocalParameterConverter() \
    .getDefaultValueProperties()
petab_problem.sbml_document.convert(converter_config)

obj = importer.create_objective()

# for some models, hyperparameters need to be adjusted
#obj.amici_solver.setMaxSteps(10000)
#obj.amici_solver.setRelativeTolerance(1e-7)
#obj.amici_solver.setAbsoluteTolerance(1e-7)

Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
↳pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
```

We can request variable derivatives via `sensi_orders`, or function values or residuals as specified via `mode`. Passing `return_dict`, we obtain the direct result of the AMICI simulation.

```
[5]: ret = obj(petab_problem.x_nominal_scaled, mode='mode_fun', sensi_orders=(0,1), return_
    ↳dict=True)
print(ret)

{'fval': 138.22199566457704, 'grad': array([ 2.20546436e-02,  5.53227499e-02,  5.
    ↳78876640e-03,  5.42272184e-03,
        -4.51595808e-05,  7.91009669e-03,  0.00000000e+00,  1.07876837e-02,
        2.40388572e-02,  1.91925085e-02,  0.00000000e+00]), 'rdatas': [<amici.numpy.
    ↳ReturnDataView object at 0x7fdb9a293c40>]}
```

The problem defined in PEtab also defines the fixing of parameters, and parameter bounds. This information is contained in a `pypesto.Problem`.

```
[6]: problem = importer.create_problem(obj)
```

In particular, the problem accounts for the fixing of parameters.

```
[7]: print(problem.x_fixed_indices, problem.x_free_indices)

[6, 10] [0, 1, 2, 3, 4, 5, 7, 8, 9]
```

The problem creates a copy of the objective function that takes into account the fixed parameters. The objective function is able to calculate function values and derivatives. A finite difference check whether the computed gradient is accurate:

```
[8]: objective = problem.objective
ret = objective(petab_problem.x_nominal_free_scaled, sensi_orders=(0,1))
print(ret)

(138.22199566457704, array([ 2.20546436e-02,  5.53227499e-02,  5.78876640e-03,  5.
    ↳42272184e-03,
        -4.51595808e-05,  7.91009669e-03,  1.07876837e-02,  2.40388572e-02,
        1.91925085e-02]))
```

```
[9]: eps = 1e-4
```

(continues on next page)

(continued from previous page)

```

def fd(x):
    grad = np.zeros_like(x)
    j = 0
    for i, xi in enumerate(x):
        mask = np.zeros_like(x)
        mask[i] += eps
        valinc, _ = objective(x+mask, sensi_orders=(0,1))
        valdec, _ = objective(x-mask, sensi_orders=(0,1))
        grad[j] = (valinc - valdec) / (2*eps)
        j += 1
    return grad

fdval = fd(petab_problem.x_nominal_free_scaled)
print("fd: ", fdval)
print("l2 difference: ", np.linalg.norm(ret[1] - fdval))

fd: [ 0.02993985  0.05897443 -0.00149735 -0.00281785 -0.00925273  0.01197046
      0.01078638  0.02403756  0.01919121]
l2 difference:  0.017256061672716528

```

In short

All of the previous steps can be shortened by directly creating an importer object and then a problem:

```
[10]: importer = pypesto.petab.PetabImporter.from_yaml(yaml_config)
problem = importer.create_problem()

Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
```

2.5.2 Run optimization

Given the problem, we can perform optimization. We can specify an optimizer to use, and a parallelization engine to speed things up.

```
[11]: optimizer = optimize.ScipyOptimizer()

# engine = pypesto.engine.SingleCoreEngine()
engine = pypesto.engine.MultiProcessEngine()

# do the optimization
result = optimize.minimize(problem=problem, optimizer=optimizer,
                           n_starts=10, engine=engine)

Engine set up to use up to 8 processes in total. The number was automatically
˓→determined and might not be appropriate on some systems.
Performing parallel task execution on 8 processes.
100%| 10/10 [00:00<00:00, 131.88it/s]
Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
```

(continues on next page)

(continued from previous page)

```
Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
Executing task 2.
Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
Executing task 1.
Executing task 0.
Executing task 3.
Executing task 4.
Executing task 6.
Executing task 5.
Executing task 7.
Final fval=249.7460, time=0.3161s, n_fval=20.
Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
Final fval=249.7460, time=0.3418s, n_fval=17.
Using existing amici model in folder /Users/pauljonasjost/Documents/GitHub_Folders/
˓→pyPESTO/doc/example/amici_models/Boehm_JProteomeRes2014.
Executing task 8.
Executing task 9.
Final fval=249.7460, time=0.6842s, n_fval=39.
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
˓→CVode : At t = 116.84 and h = 1.9371e-05, the error test failed repeatedly or with
˓→|h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 116.839896:
AMICI failed to integrate the forward problem

[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
˓→CVode : At t = 116.84 and h = 1.9371e-05, the error test failed repeatedly or with
˓→|h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 116.839896:
AMICI failed to integrate the forward problem

[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
˓→CVode : At t = 116.84 and h = 1.9371e-05, the error test failed repeatedly or with
˓→|h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 116.839896:
AMICI failed to integrate the forward problem

Final fval=159.0527, time=1.7929s, n_fval=102.
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
˓→CVode : At t = 89.1085 and h = 1.38467e-05, the error test failed repeatedly or
˓→with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 89.108509:
AMICI failed to integrate the forward problem

Final fval=147.5440, time=2.7005s, n_fval=167.
Final fval=156.3410, time=2.5897s, n_fval=136.
Final fval=154.7306, time=2.6399s, n_fval=104.
[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
˓→CVode : At t = 168.714 and h = 4.02611e-05, the error test failed repeatedly or
˓→with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 168.714402:
```

(continues on next page)

(continued from previous page)

```

AMICI failed to integrate the forward problem

[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
    ↪CVode : At t = 168.714 and h = 4.02611e-05, the error test failed repeatedly or
    ↪with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 168.714402:
AMICI failed to integrate the forward problem

[Warning] AMICI:CVODES:CVode:ERR_FAILURE: AMICI ERROR: in module CVODES in function
    ↪CVode : At t = 168.714 and h = 4.02611e-05, the error test failed repeatedly or
    ↪with |h| = hmin.
[Warning] AMICI:simulation: AMICI forward simulation failed at t = 168.714402:
AMICI failed to integrate the forward problem

Final fval=149.5878, time=3.3350s, n_fval=171.
Final fval=149.5882, time=3.8314s, n_fval=172.
Parameters obtained from history and optimizer do not match: [-1.56379081 -3.2217545
    ↪ 5.          5.          -1.89883736  4.35504207
  0.9094744   0.80931241  1.07766644], [-1.56378624 -3.22180774  5.          5.
    ↪ -1.89885149  4.355015
  0.9094958   0.80930196  1.07768133]
Final fval=171.1341, time=4.0903s, n_fval=187.

```

2.5.3 Visualize

The results are contained in a `pypesto.Result` object. It contains e.g. the optimal function values.


```
[12]: result.optimize_result.get_for_key('fval')
[12]: [147.5440308019394,
 149.5878368928219,
 149.58822002126522,
 154.7306294235784,
 156.3410332994205,
 159.05273185070513,
 171.1340766484108,
 249.74597383547857,
 249.7459974423845,
 249.74599767995497]
```

We can use the standard pyPESTO plotting routines to visualize and analyze the results.

```
[13]: ref = visualize.create_references(
    x=petab_problem.x_nominal_scaled, fval=obj(petab_problem.x_nominal_scaled))

visualize.waterfall(result, reference=ref, scale_y='lin')
visualize.parameters(result, reference=ref)


[13]: <AxesSubplot:title={'center':'Estimated parameters'}, xlabel='Parameter value',
    ↪ylabel='Parameter'>
```

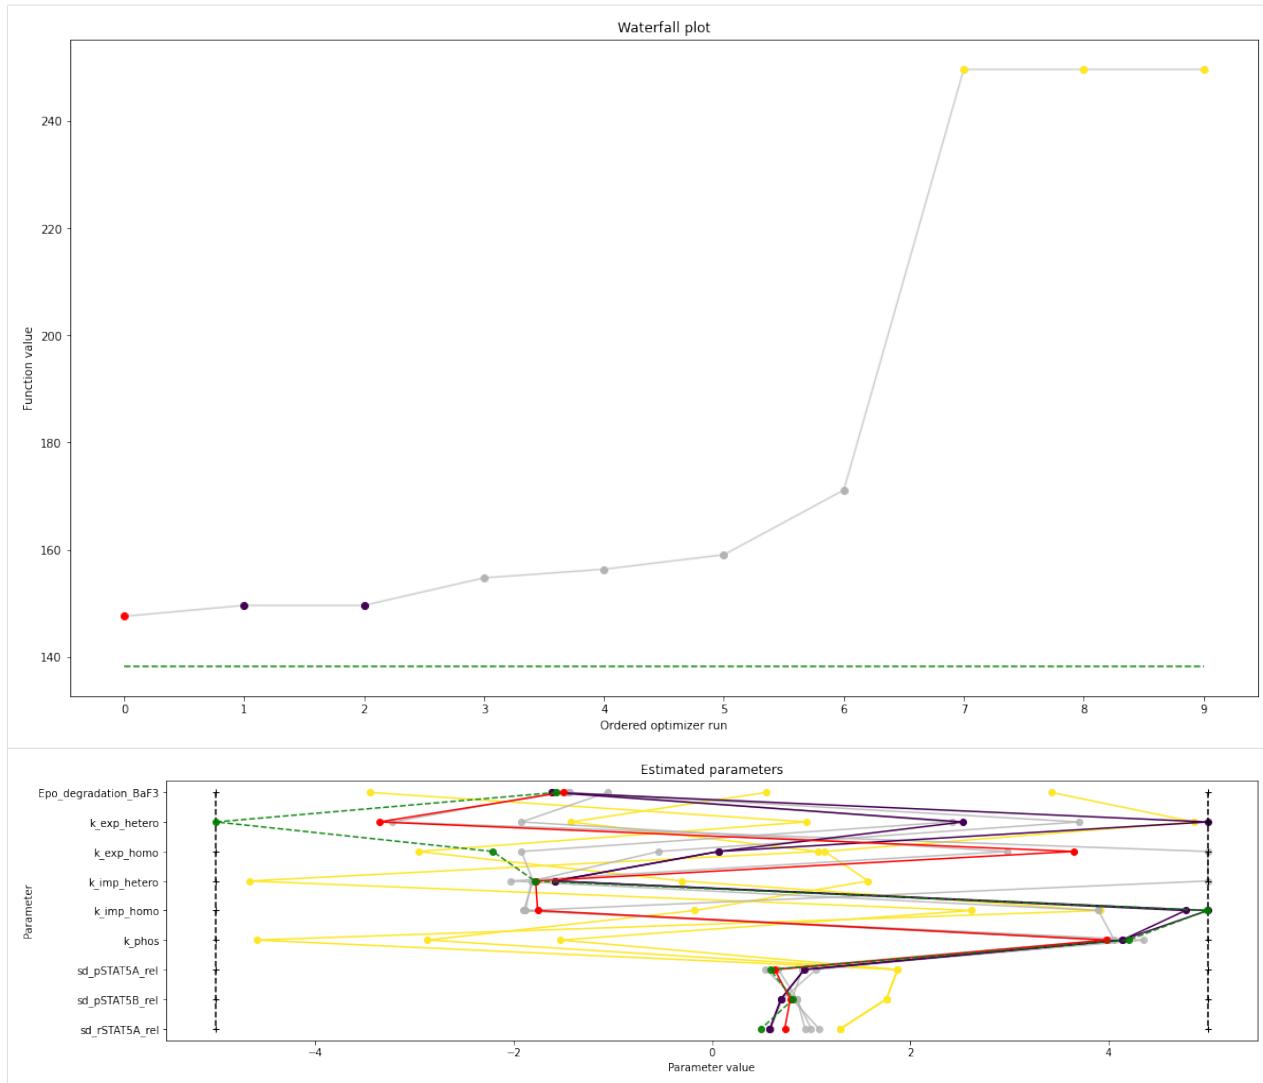

We can also conveniently visualize the model fit. This plots the petab visualization using optimized parameters.

```
[14]: # we need to explicitly import the method
from pypesto.visualize.model_fit import visualize_optimized_model_fit
visualize_optimized_model_fit(petab_problem=petab_problem,
                               result=result)

[14]: {'plot1': <AxesSubplot:title={'center':'pSTAT5A_rel'}, xlabel='Time [min]', ylabel=
    'frac. [%]'},
      'plot2': <AxesSubplot:title={'center':'pSTAT5B_rel'}, xlabel='Time [min]', ylabel=
    'frac. [%]'},
      'plot3': <AxesSubplot:title={'center':'rSTAT5A_rel'}, xlabel='Time [min]', ylabel=
    'relative STAT5A abundance [%]'}
```

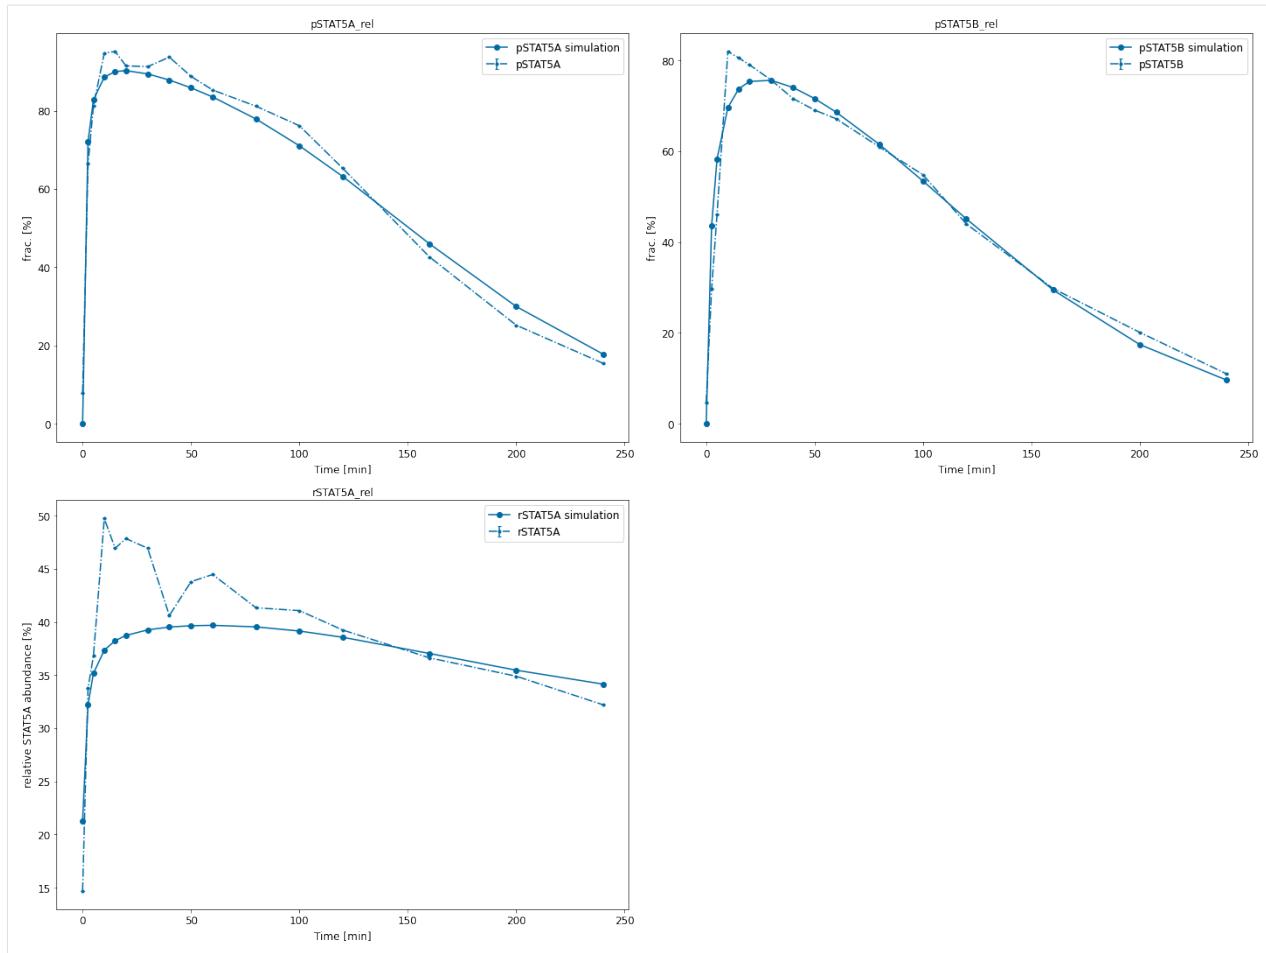

2.6 Storage

This notebook illustrates how simulations and results can be saved to file.

```
[ ]: # install if not done yet
# %pip install pypesto --quiet
```

```
[1]: import pypesto
import pypesto.optimize as optimize
import pypesto.visualize as visualize
from pypesto.store import (save_to_hdf5, read_from_hdf5)

import numpy as np
import scipy as sp
import matplotlib.pyplot as plt
import tempfile

%matplotlib inline
```

2.6.1 Define the objective and problem

```
[2]: objective = pypesto.Objective(fun=sp.optimize.rosen,
                                    grad=sp.optimize.rosen_der,
                                    hess=sp.optimize.rosen_hess)

dim_full = 10
lb = -3 * np.ones((dim_full, 1))
ub = 3 * np.ones((dim_full, 1))

problem = pypesto.Problem(objective=objective, lb=lb, ub=ub)

# create optimizers
optimizer = optimize.ScipyOptimizer(method='l-bfgs-b')

# set number of starts
n_starts = 20
```

2.6.2 Objective function traces

During optimization, it is possible to regularly write the objective function trace to file. This is useful e.g. when runs fail, or for various diagnostics. Currently, pyPESTO can save histories to 3 backends: in-memory, as CSV files, or to HDF5 files.

Memory History

To record the history in-memory, just set `trace_record=True` in the `pypesto.HistoryOptions`. Then, the optimization result contains those histories:

```
[3]: # record the history
history_options = pypesto.HistoryOptions(trace_record=True)

# Run optimizations
result = optimize.minimize(
    problem=problem, optimizer=optimizer,
    n_starts=n_starts, history_options=history_options)

0%|          | 0/20 [00:00<?, ?it/s]Executing task 0.
Final fval=0.0000, time=0.0218s, n_fval=94.
Executing task 1.
Final fval=0.0000, time=0.0142s, n_fval=61.
Executing task 2.
Final fval=0.0000, time=0.0191s, n_fval=72.
Executing task 3.
Final fval=0.0000, time=0.0185s, n_fval=76.
Executing task 4.
Final fval=0.0000, time=0.0227s, n_fval=81.
25%|          | 5/20 [00:00<00:00, 48.89it/s]Executing task 5.
Final fval=0.0000, time=0.0258s, n_fval=83.
Executing task 6.
Final fval=0.0000, time=0.0270s, n_fval=90.
Executing task 7.
Final fval=3.9866, time=0.0278s, n_fval=77.
Executing task 8.
Final fval=0.0000, time=0.0308s, n_fval=98.
```

(continues on next page)

(continued from previous page)

```

Executing task 9.
Final fval=0.0000, time=0.0256s, n_fval=96.
50%|   | 10/20 [00:00<00:00, 39.43it/s]Executing task 10.
Final fval=0.0000, time=0.0224s, n_fval=68.
Executing task 11.
Final fval=0.0000, time=0.0172s, n_fval=64.
Executing task 12.
Final fval=0.0000, time=0.0220s, n_fval=79.
Executing task 13.
Final fval=0.0000, time=0.0277s, n_fval=92.
Executing task 14.
Final fval=0.0000, time=0.0198s, n_fval=70.
75%|   | 15/20 [00:00<00:00, 41.09it/s]Executing task 15.
Final fval=0.0000, time=0.0253s, n_fval=81.
Executing task 16.
Final fval=3.9866, time=0.0226s, n_fval=61.
Executing task 17.
Final fval=3.9866, time=0.0307s, n_fval=74.
Executing task 18.
Final fval=3.9866, time=0.0236s, n_fval=71.
Executing task 19.
Final fval=0.0000, time=0.0175s, n_fval=74.
100%|| 20/20 [00:00<00:00, 40.68it/s]


```

Now, in addition to queries on the result, we can also access the

```
[4]: print("History type: ", type(result.optimize_result.list[0].history))
# print("Function value trace of best run: ", result.optimize_result.list[0].history.
    ↪get_fval_trace())

fig, ax = plt.subplots(1, 2)
visualize.waterfall(result, ax=ax[0])
visualize.optimizer_history(result, ax=ax[1])
fig.set_size_inches((15, 5))

History type: <class 'pypesto.objective.history.MemoryHistory'>
```

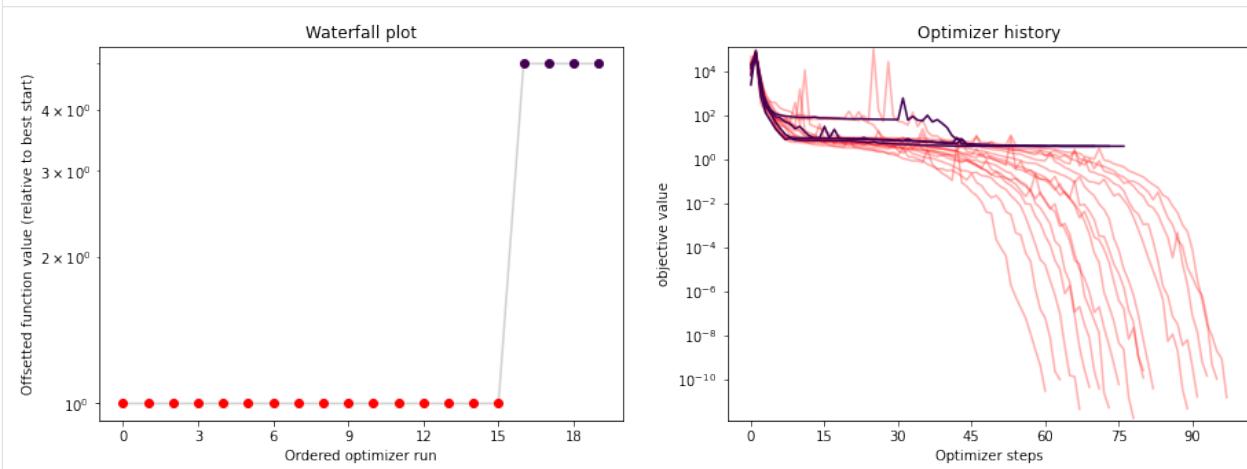

CSV History

The in-memory storage is however not stored anywhere. To do that, it is possible to store either to CSV or HDF5. This is specified via the `storage_file` option. If it ends in `.csv`, a `pypesto.objective.history.CsvHistory` will be employed; if it ends in `.hdf5` a `pypesto.objective.history.Hdf5History`. Occurrences of the substring `{id}` in the filename are replaced by the multistart id, allowing to maintain a separate file per run (this is necessary for CSV as otherwise runs are overwritten).

```
[5]: # record the history and store to CSV
history_options = pypesto.HistoryOptions(trace_record=True, storage_file='history_{id}'+'.csv')

# Run optimizaitons
result = optimize.minimize(
    problem=problem, optimizer=optimizer,
    n_starts=n_starts, history_options=history_options)


 0%|          | 0/20 [00:00<?, ?it/s]Executing task 0.
Final fval=0.0000, time=1.3848s, n_fval=87.
 5%|          | 1/20 [00:01<00:26,  1.39s/it]Executing task 1.
Final fval=0.0000, time=1.0376s, n_fval=66.
 10%|         | 2/20 [00:02<00:21,  1.18s/it]Executing task 2.
Final fval=0.0000, time=1.3995s, n_fval=87.
 15%|         | 3/20 [00:03<00:21,  1.28s/it]Executing task 3.
Final fval=0.0000, time=1.3883s, n_fval=87.
 20%|         | 4/20 [00:05<00:21,  1.33s/it]Executing task 4.
Final fval=0.0000, time=1.1283s, n_fval=74.
 25%|         | 5/20 [00:06<00:18,  1.25s/it]Executing task 5.
Final fval=0.0000, time=1.2335s, n_fval=81.
 30%|         | 6/20 [00:07<00:17,  1.25s/it]Executing task 6.
Final fval=3.9866, time=1.6121s, n_fval=106.
 35%|         | 7/20 [00:09<00:17,  1.37s/it]Executing task 7.
Final fval=0.0000, time=1.2220s, n_fval=77.
 40%|         | 8/20 [00:10<00:15,  1.32s/it]Executing task 8.
Final fval=0.0000, time=1.0812s, n_fval=71.
 45%|         | 9/20 [00:11<00:13,  1.25s/it]Executing task 9.
Final fval=0.0000, time=1.5227s, n_fval=78.
 50%|         | 10/20 [00:13<00:13,  1.33s/it]Executing task 10.
Final fval=0.0000, time=1.9653s, n_fval=97.
 55%|        | 11/20 [00:14<00:13,  1.53s/it]Executing task 11.
Final fval=0.0000, time=1.9667s, n_fval=94.
 60%|        | 12/20 [00:16<00:13,  1.66s/it]Executing task 12.
Final fval=0.0000, time=1.0537s, n_fval=57.
 65%|        | 13/20 [00:18<00:10,  1.48s/it]Executing task 13.
Final fval=0.0000, time=1.5494s, n_fval=81.
 70%|        | 14/20 [00:19<00:09,  1.50s/it]Executing task 14.
Final fval=0.0000, time=1.8838s, n_fval=94.
 75%|        | 15/20 [00:21<00:08,  1.62s/it]Executing task 15.
Final fval=0.0000, time=1.8472s, n_fval=84.
 80%|        | 16/20 [00:23<00:06,  1.69s/it]Executing task 16.
Final fval=0.0000, time=1.6928s, n_fval=85.
 85%|        | 17/20 [00:25<00:05,  1.69s/it]Executing task 17.
Final fval=0.0000, time=1.4911s, n_fval=83.
 90%|        | 18/20 [00:26<00:03,  1.63s/it]Executing task 18.
Final fval=0.0000, time=1.3229s, n_fval=74.
 95%|| 19/20 [00:27<00:01,  1.54s/it]Executing task 19.
Final fval=0.0000, time=1.5840s, n_fval=79.
100%|| 20/20 [00:29<00:00,  1.47s/it]
```

Note that for this simple cost function, saving to CSV takes a considerable amount of time. This overhead decreases for more costly simulators, e.g. using ODE simulations via AMICI.

```
[6]: print("History type: ", type(result.optimize_result.list[0].history))
# print("Function value trace of best run: ", result.optimize_result.list[0].history.
    ↪get_fval_trace())
```

```
fig, ax = plt.subplots(1, 2)
visualize.waterfall(result, ax=ax[0])
visualize.optimizer_history(result, ax=ax[1])
fig.set_size_inches((15, 5))
```

History type: <class 'pypesto.objective.history.CsvHistory'>

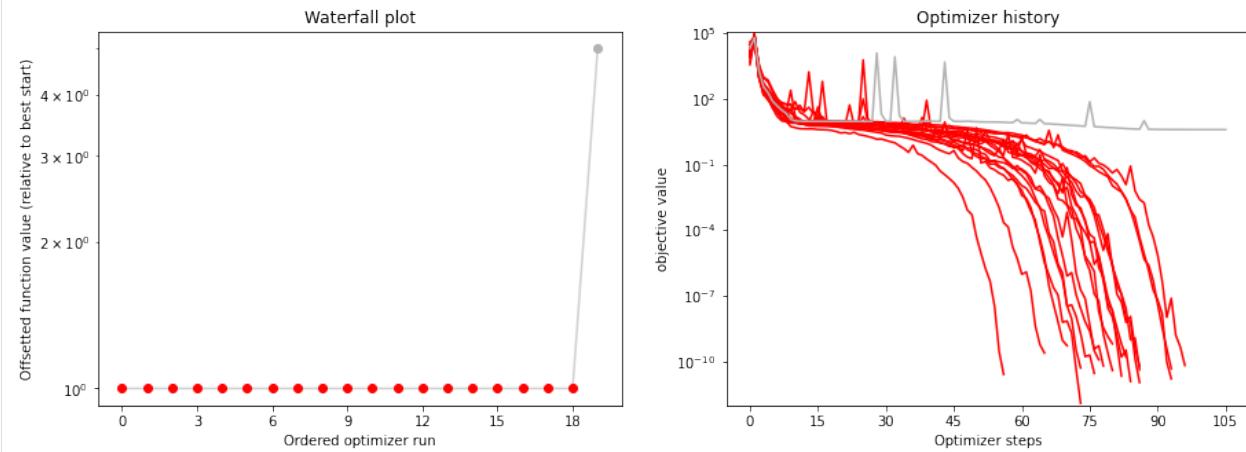

HDF5 History

Just as in CSV, writing the history to HDF5 takes a considerable amount of time. If a user specifies a HDF5 output file named `my_results.hdf5` and uses a parallelization engine, then:

- * a folder is created to contain partial results, named `my_results/` (the stem of the output filename)
- * files are created to store the results of each start, named `my_results/my_results_{START_INDEX}.hdf5`
- * a file is created to store the combined result from all starts, named `my_results.hdf5`. Note that this file depends on the files in the `my_results/` directory, so **cease to function** if `my_results/` is deleted.

```
[7]: # record the history and store to CSV
history_options = pypesto.HistoryOptions(trace_record=True, storage_file='history.hdf5
    ↪')

# Run optimizations
result = optimize.minimize(
    problem=problem, optimizer=optimizer,
    n_starts=n_starts, history_options=history_options)

0%|          | 0/20 [00:00<?, ?it/s]Executing task 0.
Final fval=0.0000, time=0.5606s, n_fval=322.
5%|          | 1/20 [00:00<00:10, 1.78it/s]Executing task 1.
Final fval=3.9866, time=0.3860s, n_fval=280.
10%|         | 2/20 [00:00<00:08, 2.18it/s]Executing task 2.
Final fval=0.0000, time=0.5257s, n_fval=342.
15%|         | 3/20 [00:01<00:08, 2.04it/s]Executing task 3.
Final fval=0.0000, time=0.4912s, n_fval=333.
20%|         | 4/20 [00:01<00:07, 2.04it/s]Executing task 4.
```

(continues on next page)

(continued from previous page)

```

Final fval=3.9866, time=0.3889s, n_fval=324.
25%|      | 5/20 [00:02<00:06, 2.20it/s]Executing task 5.
Final fval=0.0000, time=0.4808s, n_fval=345.
30%|      | 6/20 [00:02<00:06, 2.15it/s]Executing task 6.
Final fval=0.0000, time=0.4517s, n_fval=322.
35%|      | 7/20 [00:03<00:05, 2.17it/s]Executing task 7.
Final fval=0.0000, time=0.5006s, n_fval=347.
40%|      | 8/20 [00:03<00:05, 2.11it/s]Executing task 8.
Final fval=0.0000, time=0.4723s, n_fval=311.
45%|      | 9/20 [00:04<00:05, 2.11it/s]Executing task 9.
Final fval=0.0000, time=0.3521s, n_fval=307.
50%|      | 10/20 [00:04<00:04, 2.29it/s]Executing task 10.
Final fval=3.9866, time=0.4401s, n_fval=283.
55%|      | 11/20 [00:05<00:03, 2.28it/s]Executing task 11.
Final fval=0.0000, time=0.4453s, n_fval=356.
60%|      | 12/20 [00:05<00:03, 2.27it/s]Executing task 12.
Final fval=0.0000, time=0.3788s, n_fval=335.
65%|      | 13/20 [00:05<00:02, 2.37it/s]Executing task 13.
Final fval=0.0000, time=0.4477s, n_fval=334.
70%|      | 14/20 [00:06<00:02, 2.32it/s]Executing task 14.
Final fval=0.0000, time=0.4339s, n_fval=319.
75%|      | 15/20 [00:06<00:02, 2.31it/s]Executing task 15.
Final fval=0.0000, time=0.4260s, n_fval=343.
80%|      | 16/20 [00:07<00:01, 2.32it/s]Executing task 16.
Final fval=3.9866, time=0.4394s, n_fval=313.
85%|      | 17/20 [00:07<00:01, 2.31it/s]Executing task 17.
Final fval=0.0000, time=0.2605s, n_fval=265.
90%|      | 18/20 [00:07<00:00, 2.62it/s]Executing task 18.
Final fval=0.0000, time=0.4477s, n_fval=340.
95%|| 19/20 [00:08<00:00, 2.49it/s]Executing task 19.
Final fval=3.9866, time=0.5053s, n_fval=337.
100%|| 20/20 [00:08<00:00, 2.26it/s]

```


```

[8]: print("History type: ", type(result.optimize_result.list[0].history))
# print("Function value trace of best run: ", result.optimize_result.list[0].history.
#       ↪get_fval_trace())

fig, ax = plt.subplots(1, 2)
visualize.waterfall(result, ax=ax[0])
visualize.optimizer_history(result, ax=ax[1])
fig.set_size_inches((15, 5))

History type: <class 'pypesto.objective.history.Hdf5History'>

```

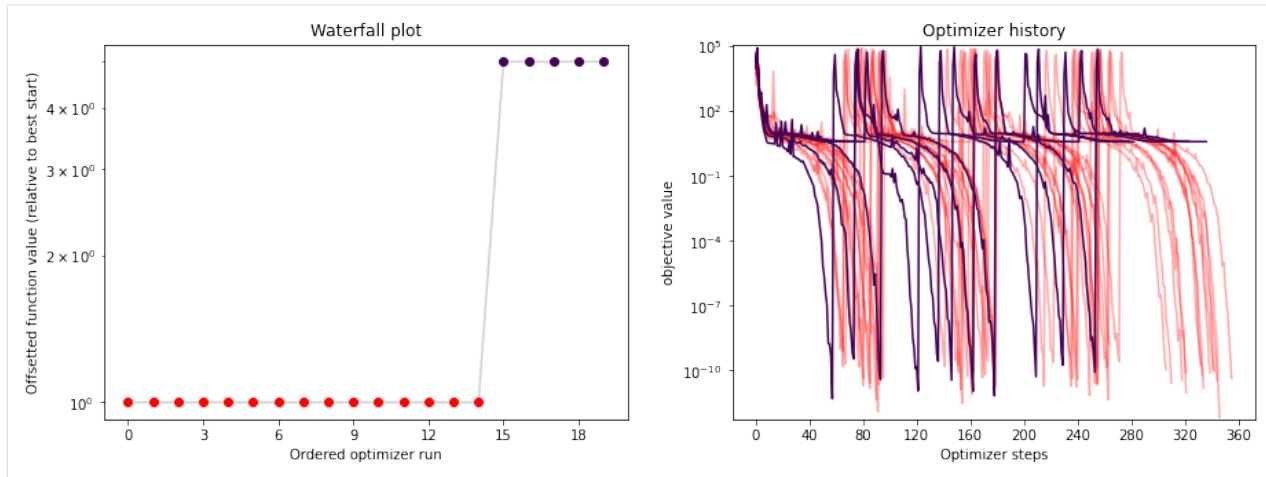

2.6.3 Result storage

Result objects can be stored as HDF5 files. When applicable, this is preferable to just pickling results, which is not guaranteed to be reproducible in the future.

```
[9]: # Run optimizations
result = optimize.minimize(
    problem=problem, optimizer=optimizer,
    n_starts=n_starts)

0% | 0/20 [00:00<?, ?it/s] Executing task 0.
Final fval=3.9866, time=0.0118s, n_fval=48.
Executing task 1.
Final fval=3.9866, time=0.0201s, n_fval=90.
Executing task 2.
Final fval=0.0000, time=0.0210s, n_fval=100.
Executing task 3.
Final fval=0.0000, time=0.0164s, n_fval=73.
Executing task 4.
Final fval=0.0000, time=0.0174s, n_fval=76.
Executing task 5.
Final fval=0.0000, time=0.0155s, n_fval=71.
30% | 6/20 [00:00<00:00, 55.46it/s] Executing task 6.
Final fval=0.0000, time=0.0190s, n_fval=87.
Executing task 7.
Final fval=0.0000, time=0.0195s, n_fval=88.
Executing task 8.
Final fval=0.0000, time=0.0177s, n_fval=79.
Executing task 9.
Final fval=3.9866, time=0.0179s, n_fval=83.
Executing task 10.
Final fval=0.0000, time=0.0188s, n_fval=86.
Executing task 11.
Final fval=3.9866, time=0.0202s, n_fval=84.
60% | 12/20 [00:00<00:00, 52.23it/s] Executing task 12.
Final fval=3.9866, time=0.0188s, n_fval=82.
Executing task 13.
Final fval=0.0000, time=0.0211s, n_fval=91.
Executing task 14.
```

(continues on next page)

(continued from previous page)

```

Final fval=3.9866, time=0.0170s, n_fval=75.
Executing task 15.
Final fval=0.0000, time=0.0124s, n_fval=54.
Executing task 16.
Final fval=0.0000, time=0.0161s, n_fval=70.
Executing task 17.
Final fval=0.0000, time=0.0177s, n_fval=81.
90% | 18/20 [00:00<00:00, 53.48it/s] Executing task 18.
Final fval=0.0000, time=0.0187s, n_fval=82.
Executing task 19.
Final fval=3.9866, time=0.0163s, n_fval=75.
100% | 20/20 [00:00<00:00, 53.45it/s]

```

```

[10]: result.optimize_result.list[0:2]
[10]: [{"id": "4",
      "x": array([1.00000001, 1.          , 1.          , 0.99999999, 0.99999999,
                 1.00000001, 1.00000001, 1.00000004, 1.00000008, 1.00000014]),
      "fval": 2.6045655152986313e-13,
      "grad": array([ 7.38459033e-06, -4.78320167e-07, -6.50914679e-07, -1.47726642e-06,
                     -1.39575141e-05,  9.14793168e-06, -7.58437136e-06,  4.50055738e-07,
                     1.01219510e-05, -4.24214104e-06]),
      "hess": None,
      "res": None,
      "sres": None,
      "n_fval": 76,
      "n_grad": 76,
      "n_hess": 0,
      "n_res": 0,
      "n_sres": 0,
      "x0": array([ 0.33383114,  2.09297901, -1.77381628, -1.60663808, -2.85350433,
                  0.71050093, -1.190691  ,  0.91974885, -2.34344618,  1.21791823]),
      "fval0": 18119.670540771178,
      "history": <pypesto.objective.history.History at 0x7ffd399536a0>,
      "exitflag": 0,
      "time": 0.017375946044921875,
      "message": 'CONVERGENCE: REL_REDUCTION_OF_F_<=_FACTR*EPSMCH'},
     {"id": "16",
      "x": array([1.          , 1.          , 1.00000001, 1.          , 1.00000001,
                 1.00000003, 1.00000007, 1.00000009, 1.00000017, 1.00000039]),
      "fval": 7.312572536347769e-13,
      "grad": array([ 3.34432881e-06, -6.16413761e-06,  1.25983886e-05, -5.34613024e-06,
                     -7.50765648e-06,  1.11777438e-06,  1.94167105e-05, -5.91496342e-06,
                     -2.50337361e-05,  1.19659990e-05]),
      "hess": None,
      "res": None,
      "sres": None,
      "n_fval": 70,
      "n_grad": 70,
      "n_hess": 0,
      "n_res": 0,
      "n_sres": 0,
      "x0": array([ 2.58291438,  2.48719491,  2.93132676, -0.75290073,  0.34568409,
                  0.60255167, -0.68200823, -1.01952663, -2.47953741,  2.14959561]),
      "fval0": 14770.270006296314,
      "history": <pypesto.objective.history.History at 0x7ffd496cea90>,
      "exitflag": 0}
    ]

```

(continues on next page)


(continued from previous page)

```
'time': 0.016092777252197266,
'message': 'CONVERGENCE: REL_REDUCTION_OF_F_<=_FACTR*EPSMCH' } ]
```

As usual, having obtained our result, we can directly perform some plots:

```
[11]: # plot waterfall
visualize.waterfall(result, size=(15, 6))

[11]: <AxesSubplot:title={'center':'Waterfall plot'}, xlabel='Ordered optimizer run', ylabel='Offsetted function value (relative to best start)'>
```

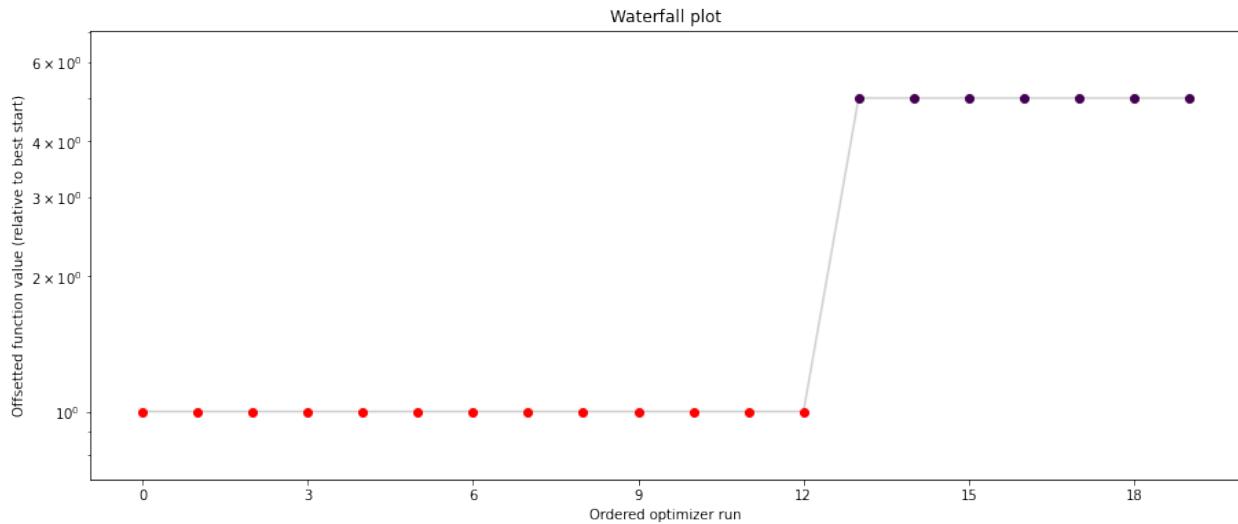

Save optimization result as HDF5 file

The optimization result can be saved with `pypesto.store.write_result()`. This will write the problem and the optimization result, and the profiling and sampling results if available, to HDF5. All of them can be disabled with boolean flags (see [the documentation](#))

```
[12]: fn = tempfile.mktemp(".hdf5")

# Write result
save_to_hdf5.write_result(result, fn)

Warning: There is no sampling_result, which you tried to save to hdf5.
```

Read optimization result from HDF5 file

When reading in the stored result again, we recover the original optimization result:

```
[13]: # Read result and problem
result = read_from_hdf5.read_result(fn)

WARNING: You are loading a problem.
This problem is not to be used without a separately created objective.
WARNING: You are loading a problem.
This problem is not to be used without a separately created objective.
WARNING: You are loading a problem.
```

(continues on next page)

(continued from previous page)


This problem is not to be used without a separately created objective.
 WARNING: You are loading a problem.
 This problem is not to be used without a separately created objective.
 Loading the sampling result failed. It is highly likely that no sampling result
 ↪exists within /var/folders/2f/bnywv1ns2_9g8wtzlf_74yzh000gn/T/tmpewjf65r6.hdf5.

```
[14]: result.optimize_result.list[0:2]

[14]: [ {'id': '4',
  'x': array([1.00000001, 1.          , 1.          , 0.99999999, 0.99999999,
             1.00000001, 1.00000001, 1.00000004, 1.00000008, 1.00000014]),
  'fval': 2.6045655152986313e-13,
  'grad': array([ 7.38459033e-06, -4.78320167e-07, -6.50914679e-07, -1.47726642e-06,
                 -1.39575141e-05,  9.14793168e-06, -7.58437136e-06,  4.50055738e-07,
                 1.01219510e-05, -4.24214104e-06]),
  'hess': None,
  'res': None,
  'sres': None,
  'n_fval': 76,
  'n_grad': 76,
  'n_hess': 0,
  'n_res': 0,
  'n_sres': 0,
  'x0': array([ 0.33383114,  2.09297901, -1.77381628, -1.60663808, -2.85350433,
               0.71050093, -1.190691   ,  0.91974885, -2.34344618,  1.21791823]),
  'fval0': 18119.670540771178,
  'history': None,
  'exitflag': 0,
  'time': 0.017375946044921875,
  'message': 'CONVERGENCE: REL_REDUCTION_OF_F_<=_FACTR*EPSMCH' },
  {'id': '16',
  'x': array([1.          , 1.          , 1.00000001, 1.          , 1.00000001,
             1.00000003, 1.00000007, 1.00000009, 1.00000017, 1.00000039]),
  'fval': 7.312572536347769e-13,
  'grad': array([ 3.34432881e-06, -6.16413761e-06,  1.25983886e-05, -5.34613024e-06,
                 -7.50765648e-06,  1.11777438e-06,  1.94167105e-05, -5.91496342e-06,
                 -2.50337361e-05,  1.19659990e-05]),
  'hess': None,
  'res': None,
  'sres': None,
  'n_fval': 70,
  'n_grad': 70,
  'n_hess': 0,
  'n_res': 0,
  'n_sres': 0,
  'x0': array([ 2.58291438,  2.48719491,  2.93132676, -0.75290073,  0.34568409,
               0.60255167, -0.68200823, -1.01952663, -2.47953741,  2.14959561]),
  'fval0': 14770.270006296314,
  'history': None,
  'exitflag': 0,
  'time': 0.016092777252197266,
  'message': 'CONVERGENCE: REL_REDUCTION_OF_F_<=_FACTR*EPSMCH' }]
```

```
[15]: # plot waterfalls
pypesto.visualize.waterfall(result, size=(15,6))
```

```
[15]: <AxesSubplot:title={'center':'Waterfall plot'}, xlabel='Ordered optimizer run',  
      ylabel='Offsetted function value (relative to best start)'>
```

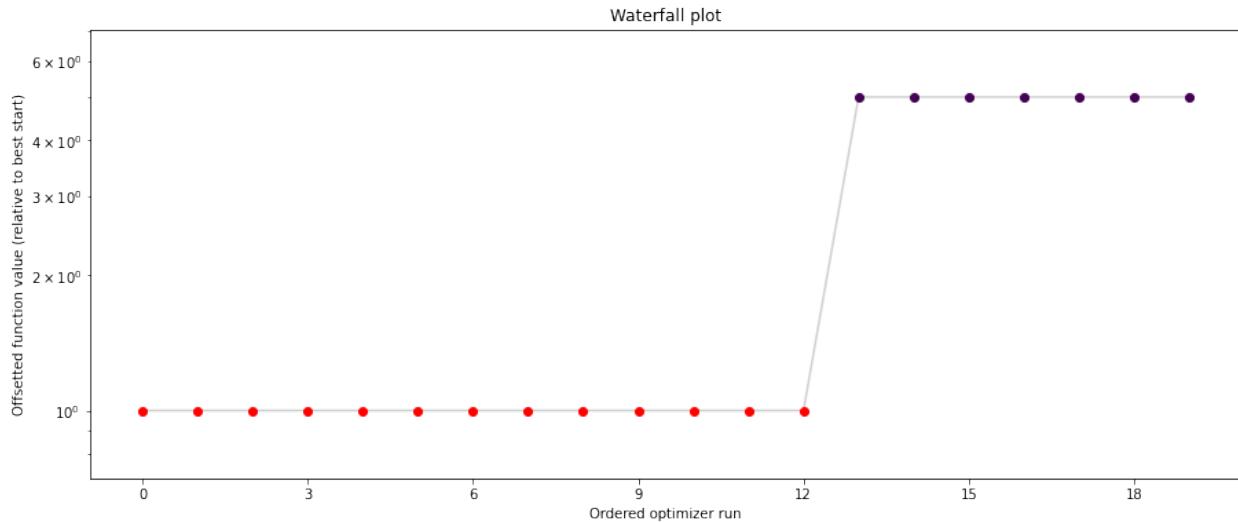

2.7 A sampler study

In this notebook, we perform a short study of how various samplers implemented in pyPESTO perform.

```
[ ]: # install if not done yet  
# !apt install libatlas-base-dev swig  
# %pip install pypesto[amici,petab,pymc3,emcee] --quiet
```

2.7.1 The pipeline

First, we show a typical workflow, fully integrating the samplers with a PETab problem, using a toy example of a conversion reaction.

```
[1]: import pypesto  
import pypesto.petab  
import pypesto.optimize as optimize  
import pypesto.sample as sample  
import pypesto.visualize as visualize  
import petab  
  
# import to petab  
petab_problem = petab.Problem.from_yaml(  
    "conversion_reaction/conversion_reaction.yaml")  
# import to pypesto  
importer = pypesto.petab.PetabImporter(petab_problem)  
# create problem  
problem = importer.create_problem()  
  
2021-03-15 08:50:22.614 - amici.petab_import - INFO - Importing model ...  
2021-03-15 08:50:22.617 - amici.petab_import - INFO - Model name is 'conversion_  
reaction_0'.  
Writing model code to '/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0'.  
(continues on next page)
```

(continued from previous page)

```

2021-03-15 08:50:22.619 - amici.petab_import - INFO - Species: 2
2021-03-15 08:50:22.619 - amici.petab_import - INFO - Global parameters: 2
2021-03-15 08:50:22.620 - amici.petab_import - INFO - Reactions: 2
2021-03-15 08:50:22.629 - amici.petab_import - INFO - Observables: 1
2021-03-15 08:50:22.632 - amici.petab_import - INFO - Sigmas: 1
2021-03-15 08:50:22.635 - amici.petab_import - DEBUG - Adding output parameters to _model: OrderedDict()
2021-03-15 08:50:22.636 - amici.petab_import - DEBUG - Adding initial assignments for _model: []
2021-03-15 08:50:22.637 - amici.petab_import - DEBUG - Condition table: (1, 0)
2021-03-15 08:50:22.637 - amici.petab_import - DEBUG - Fixed parameters are []
2021-03-15 08:50:22.638 - amici.petab_import - INFO - Overall fixed parameters: 0
2021-03-15 08:50:22.639 - amici.petab_import - INFO - Variable parameters: 2
2021-03-15 08:50:22.655 - amici.sbml_import - INFO - Finished gathering local SBML _symbols ++ (3.76E-03s)
2021-03-15 08:50:22.660 - amici.sbml_import - INFO - Finished processing SBML _parameters ++ (1.52E-04s)
2021-03-15 08:50:22.665 - amici.sbml_import - INFO - Finished processing SBML _compartments ++ (2.55E-04s)
2021-03-15 08:50:22.674 - amici.sbml_import - INFO - Finished processing SBML species _initials +++ (2.79E-04s)
2021-03-15 08:50:22.679 - amici.sbml_import - INFO - Finished processing SBML rate _rules +++ (3.09E-05s)
2021-03-15 08:50:22.680 - amici.sbml_import - INFO - Finished processing SBML species _assignments ++ (9.89E-03s)
2021-03-15 08:50:22.688 - amici.sbml_import - INFO - Finished processing SBML _reactions ++ (1.64E-03s)
2021-03-15 08:50:22.693 - amici.sbml_import - INFO - Finished processing SBML rules _assignments ++ (2.03E-04s)
2021-03-15 08:50:22.698 - amici.sbml_import - INFO - Finished processing SBML initial _assignments++ (7.04E-05s)
2021-03-15 08:50:22.704 - amici.sbml_import - INFO - Finished processing SBML species _references ++ (2.42E-04s)
2021-03-15 08:50:22.704 - amici.sbml_import - INFO - Finished importing SBML _assignments + (5.85E-02s)
2021-03-15 08:50:22.758 - amici.sbml_import - INFO - Finished processing SBML _observables + (4.68E-02s)
2021-03-15 08:50:22.772 - amici.ode_export - INFO - Finished running smart_multiply _assignments ++ (1.29E-03s)
2021-03-15 08:50:22.785 - amici.ode_export - INFO - Finished simplifying w _assignments +++ (1.97E-03s)
2021-03-15 08:50:22.785 - amici.ode_export - INFO - Finished computing w _assignments ++ (7.49E-03s)
2021-03-15 08:50:22.788 - amici.ode_export - INFO - Finished importing SbmlImporter _assignments + (2.05E-02s)
2021-03-15 08:50:22.810 - amici.ode_export - INFO - Finished simplifying Jy _assignments ++++ (6.82E-03s)
2021-03-15 08:50:22.810 - amici.ode_export - INFO - Finished computing Jy _assignments +++ (1.05E-02s)
2021-03-15 08:50:22.832 - amici.ode_export - INFO - Finished writing Jy.cpp _assignments ++ (3.50E-02s)
2021-03-15 08:50:22.854 - amici.ode_export - INFO - Finished running smart_jacobian _assignments ++++ (1.02E-02s)
2021-03-15 08:50:22.863 - amici.ode_export - INFO - Finished simplifying dJydsigmaMay _assignments ++++ (3.55E-03s)
2021-03-15 08:50:22.863 - amici.ode_export - INFO - Finished computing dJydsigmaMay _assignments +++ (2.29E-02s)

```

(continues on next page)

(continued from previous page)

```

2021-03-15 08:50:22.867 - amici.ode_export - INFO - Finished writing dJydsigmay.cpp ↵
    ++ (3.04E-02s)
2021-03-15 08:50:22.884 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (5.70E-03s)
2021-03-15 08:50:22.895 - amici.ode_export - INFO - Finished simplifying dJydy ↵
    ++++ (5.63E-03s)
2021-03-15 08:50:22.897 - amici.ode_export - INFO - Finished computing dJydy ↵
    +++ (2.16E-02s)
2021-03-15 08:50:22.904 - amici.ode_export - INFO - Finished writing dJydy.cpp ↵
    ++ (3.23E-02s)
2021-03-15 08:50:22.921 - amici.ode_export - INFO - Finished simplifying root ↵
    ++++ (7.09E-05s)
2021-03-15 08:50:22.922 - amici.ode_export - INFO - Finished computing root ↵
    +++ (6.78E-03s)
2021-03-15 08:50:22.923 - amici.ode_export - INFO - Finished writing root.cpp ↵
    ++ (1.28E-02s)
2021-03-15 08:50:22.944 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (3.90E-03s)
2021-03-15 08:50:22.953 - amici.ode_export - INFO - Finished simplifying dwdp ↵
    ++++ (1.53E-03s)
2021-03-15 08:50:22.956 - amici.ode_export - INFO - Finished computing dwdp ↵
    +++ (2.09E-02s)
2021-03-15 08:50:22.964 - amici.ode_export - INFO - Finished writing dwdp.cpp ↵
    ++ (3.48E-02s)
2021-03-15 08:50:22.991 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (4.88E-03s)
2021-03-15 08:50:22.997 - amici.ode_export - INFO - Finished simplifying dwdx ↵
    ++++ (1.64E-03s)
2021-03-15 08:50:23.000 - amici.ode_export - INFO - Finished computing dwdx ↵
    +++ (2.08E-02s)
2021-03-15 08:50:23.006 - amici.ode_export - INFO - Finished writing dwdx.cpp ↵
    ++ (3.27E-02s)
2021-03-15 08:50:23.022 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (1.28E-04s)
2021-03-15 08:50:23.028 - amici.ode_export - INFO - Finished simplifying dwdw ↵
    ++++ (8.05E-05s)
2021-03-15 08:50:23.029 - amici.ode_export - INFO - Finished computing dwdw ↵
    +++ (1.16E-02s)
2021-03-15 08:50:23.032 - amici.ode_export - INFO - Finished writing dwdw.cpp ↵
    ++ (2.06E-02s)
2021-03-15 08:50:23.056 - amici.ode_export - INFO - Finished simplifying xdot ↵
    ++++ (2.48E-03s)
2021-03-15 08:50:23.057 - amici.ode_export - INFO - Finished computing xdot ↵
    +++ (1.02E-02s)
2021-03-15 08:50:23.066 - amici.ode_export - INFO - Finished writing dxddotdw.cpp ↵
    ++ (2.14E-02s)
2021-03-15 08:50:23.089 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (2.54E-03s)
2021-03-15 08:50:23.100 - amici.ode_export - INFO - Finished simplifying dxddotdx_ ↵
    ↵ explicit     ++++ (1.42E-04s)
2021-03-15 08:50:23.102 - amici.ode_export - INFO - Finished computing dxddotdx_ ↵
    ↵ explicit     +++ (2.35E-02s)
2021-03-15 08:50:23.104 - amici.ode_export - INFO - Finished writing dxddotdx_explicit. ↵
    ↵ cpp         ++ (3.17E-02s)
2021-03-15 08:50:23.133 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (2.19E-04s)
2021-03-15 08:50:23.142 - amici.ode_export - INFO - Finished simplifying dxddotdp_ ↵
    ↵ explicit     ++++ (1.24E-04s)

```

(continues on next page)

(continued from previous page)

```

2021-03-15 08:50:23.143 - amici.ode_export - INFO - Finished computing dxdotdp_
↳ explicit      +++ (1.97E-02s)
2021-03-15 08:50:23.146 - amici.ode_export - INFO - Finished writing dxdotdp_explicit.
↳ cpp          ++ (3.14E-02s)
2021-03-15 08:50:23.179 - amici.ode_export - INFO - Finished simplifying y
↳      ++++++ (4.50E-05s)
2021-03-15 08:50:23.179 - amici.ode_export - INFO - Finished computing y
↳      +++++ (4.03E-03s)
2021-03-15 08:50:23.188 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++++ (8.90E-04s)
2021-03-15 08:50:23.194 - amici.ode_export - INFO - Finished simplifying dydx
↳      +++++ (6.74E-05s)
2021-03-15 08:50:23.195 - amici.ode_export - INFO - Finished computing dydx
↳      ++++ (2.33E-02s)
2021-03-15 08:50:23.211 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++++ (1.15E-04s)
2021-03-15 08:50:23.218 - amici.ode_export - INFO - Finished simplifying dydw
↳      +++++ (9.86E-05s)
2021-03-15 08:50:23.219 - amici.ode_export - INFO - Finished computing dydw
↳      +++ (1.33E-02s)
2021-03-15 08:50:23.225 - amici.ode_export - INFO - Finished simplifying dydx
↳      +++ (8.66E-05s)
2021-03-15 08:50:23.226 - amici.ode_export - INFO - Finished computing dydx
↳      +++ (5.92E-02s)
2021-03-15 08:50:23.230 - amici.ode_export - INFO - Finished writing dydx.cpp
↳      ++ (6.91E-02s)
2021-03-15 08:50:23.249 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++++ (1.44E-04s)
2021-03-15 08:50:23.256 - amici.ode_export - INFO - Finished simplifying dydp
↳      +++++ (6.76E-05s)
2021-03-15 08:50:23.257 - amici.ode_export - INFO - Finished computing dydp
↳      +++ (1.17E-02s)
2021-03-15 08:50:23.262 - amici.ode_export - INFO - Finished simplifying dydp
↳      +++ (6.56E-05s)
2021-03-15 08:50:23.262 - amici.ode_export - INFO - Finished computing dydp
↳      +++ (2.19E-02s)
2021-03-15 08:50:23.263 - amici.ode_export - INFO - Finished writing dydp.cpp
↳      ++ (2.69E-02s)
2021-03-15 08:50:23.278 - amici.ode_export - INFO - Finished simplifying sigmay
↳      +++++ (4.36E-05s)
2021-03-15 08:50:23.278 - amici.ode_export - INFO - Finished computing sigmay
↳      +++ (3.84E-03s)
2021-03-15 08:50:23.283 - amici.ode_export - INFO - Finished running smart_jacobian
↳      +++ (2.24E-04s)
2021-03-15 08:50:23.288 - amici.ode_export - INFO - Finished simplifying dsigmaydp
↳      +++ (6.41E-05s)
2021-03-15 08:50:23.289 - amici.ode_export - INFO - Finished computing dsigmaydp
↳      +++ (1.77E-02s)
2021-03-15 08:50:23.290 - amici.ode_export - INFO - Finished writing dsigmaydp.cpp
↳      ++ (2.23E-02s)
2021-03-15 08:50:23.299 - amici.ode_export - INFO - Finished writing sigmay.cpp
↳      ++ (1.19E-03s)
2021-03-15 08:50:23.308 - amici.ode_export - INFO - Finished computing stau
↳      +++ (1.14E-04s)
2021-03-15 08:50:23.309 - amici.ode_export - INFO - Finished writing stau.cpp
↳      ++ (4.80E-03s)
2021-03-15 08:50:23.317 - amici.ode_export - INFO - Finished computing deltax
↳      +++ (1.12E-04s)

```

(continues on next page)

(continued from previous page)

```

2021-03-15 08:50:23.318 - amici.ode_export - INFO - Finished writing deltasx.cpp ↵
    ++ (4.36E-03s)
2021-03-15 08:50:23.324 - amici.ode_export - INFO - Finished writing w.cpp ↵
    ++ (1.32E-03s)
2021-03-15 08:50:23.336 - amici.ode_export - INFO - Finished simplifying x0 ↵
    ++++ (4.87E-05s)
2021-03-15 08:50:23.337 - amici.ode_export - INFO - Finished computing x0 ↵
    +++ (4.14E-03s)
2021-03-15 08:50:23.339 - amici.ode_export - INFO - Finished writing x0.cpp ↵
    ++ (9.07E-03s)
2021-03-15 08:50:23.351 - amici.ode_export - INFO - Finished simplifying x0_ ↵
    ↵fixedParameters     ++++ (3.09E-05s)
2021-03-15 08:50:23.352 - amici.ode_export - INFO - Finished computing x0_ ↵
    ↵fixedParameters     +++ (4.07E-03s)
2021-03-15 08:50:23.353 - amici.ode_export - INFO - Finished writing x0_ ↵
    ↵fixedParameters.cpp ++ (9.17E-03s)
2021-03-15 08:50:23.364 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++ (2.02E-04s)
2021-03-15 08:50:23.369 - amici.ode_export - INFO - Finished simplifying sx0 ↵
    ++++ (8.59E-05s)
2021-03-15 08:50:23.370 - amici.ode_export - INFO - Finished computing sx0 ↵
    +++ (9.57E-03s)
2021-03-15 08:50:23.371 - amici.ode_export - INFO - Finished writing sx0.cpp ↵
    ++ (1.38E-02s)
2021-03-15 08:50:23.383 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (4.07E-05s)
2021-03-15 08:50:23.390 - amici.ode_export - INFO - Finished running smart_jacobian ↵
    ++++ (6.25E-05s)
2021-03-15 08:50:23.396 - amici.ode_export - INFO - Finished simplifying sx0_ ↵
    ↵fixedParameters     ++++ (4.51E-05s)
2021-03-15 08:50:23.397 - amici.ode_export - INFO - Finished computing sx0_ ↵
    ↵fixedParameters     +++ (1.78E-02s)
2021-03-15 08:50:23.398 - amici.ode_export - INFO - Finished writing sx0_ ↵
    ↵fixedParameters.cpp ++ (2.25E-02s)
2021-03-15 08:50:23.407 - amici.ode_export - INFO - Finished writing xdot.cpp ↵
    ++ (2.42E-03s)
2021-03-15 08:50:23.412 - amici.ode_export - INFO - Finished writing y.cpp ↵
    ++ (5.83E-04s)
2021-03-15 08:50:23.425 - amici.ode_export - INFO - Finished simplifying x_rdata ↵
    ++++ (6.01E-05s)
2021-03-15 08:50:23.425 - amici.ode_export - INFO - Finished computing x_rdata ↵
    +++ (4.55E-03s)
2021-03-15 08:50:23.427 - amici.ode_export - INFO - Finished writing x_rdata.cpp ↵
    ++ (9.85E-03s)
2021-03-15 08:50:23.442 - amici.ode_export - INFO - Finished simplifying total_cl ↵
    ++++ (3.69E-05s)
2021-03-15 08:50:23.442 - amici.ode_export - INFO - Finished computing total_cl ↵
    +++ (4.29E-03s)
2021-03-15 08:50:23.443 - amici.ode_export - INFO - Finished writing total_cl.cpp ↵
    ++ (9.21E-03s)
2021-03-15 08:50:23.459 - amici.ode_export - INFO - Finished simplifying x_solver ↵
    ++++ (7.44E-05s)
2021-03-15 08:50:23.460 - amici.ode_export - INFO - Finished computing x_solver ↵
    +++ (5.19E-03s)
2021-03-15 08:50:23.462 - amici.ode_export - INFO - Finished writing x_solver.cpp ↵
    ++ (1.14E-02s)
2021-03-15 08:50:23.472 - amici.ode_export - INFO - Finished generating cpp code ↵
    + (6.78E-01s)

```

(continues on next page)

(continued from previous page)

```
2021-03-15 08:50:55.810 - amici.ode_export - INFO - Finished compiling cpp code ↵
↪ + (3.23E+01s)
2021-03-15 08:50:55.813 - amici.petab_import - INFO - Finished Importing PEtab model ↵
↪ (3.32E+01s)
```

```
running build_ext
Changed extra_compile_args for unix to ['-fopenmp', '-std=c++14']
building 'conversion_reaction_0._conversion_reaction_0' extension
Testing SWIG executable swig4.0... FAILED.
Testing SWIG executable swig3.0... SUCCEEDED.
swigging swig/conversion_reaction_0.i to swig/conversion_reaction_0_wrap.cpp
swig3.0 -python -c++ -modern -outdir conversion_reaction_0 -I/usr/local/lib/python3.8/
↪ dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/swig -I/usr/local/lib/
↪ python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/include -o swig/
↪ conversion_reaction_0_wrap.cpp swig/conversion_reaction_0.i
creating build
creating build/temp.linux-x86_64-3.8
creating build/temp.linux-x86_64-3.8/swig
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -
↪ O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -
↪ O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_
↪ FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/
↪ conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-
↪ linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.
↪ 13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-
↪ packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/
↪ usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/
↪ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -
↪ c swig/conversion_reaction_0_wrap.cpp -o build/temp.linux-x86_64-3.8/swig/
↪ conversion_reaction_0_wrap.o -fopenmp -std=c++14
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -
↪ O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -
↪ O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_
↪ FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/
↪ conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-
↪ linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.
↪ 13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-
↪ packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/
↪ usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/
↪ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -
↪ c conversion_reaction_0_Jy.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_
↪ Jy.o -fopenmp -std=c++14
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -
↪ O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -
↪ O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_
↪ FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/
↪ conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-
↪ linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.
↪ 13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-
↪ packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/
↪ usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/
↪ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -
↪ c conversion_reaction_0_deltasx.cpp -o build/temp.linux-x86_64-3.8/conversion_
↪ reaction_0_deltasx.o -fopenmp -std=c++14
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -
↪ O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -
↪ O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_
↪ FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/
↪ conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-
↪ linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.
```

(continues on next page)

58 13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-
Chapter 2. Examples

```
↪ packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/
↪ usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/
↪ ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -
↪ c conversion_reaction_0_dxdotdp_explicit_rowvals.cpp -o build/temp.linux-x86_64-3.8/
```

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxdotdw.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_dxdotdw.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdp_rowvals.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_dwdp_rowvals.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_w.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_  
w.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dydx.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_dydx.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_stau.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_stau.o -fopenmp -std=c++14
```

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_x0.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_  
x0.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_total_cl.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_total_cl.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdw_colptrs.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_dwdw_colptrs.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dJydsigmay.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_dJydsigmay.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxdt_dx_explicit.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_dxdt_dx_explicit.o -fopenmp -std=c++14
```

(continues on next page)

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dydp.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_dydp.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_sigmay.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_sigmay.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0.o -  
fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dJydy_colptrs.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_dJydy_colptrs.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxddotdx_explicit_colptrs.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_dxddotdx_explicit_colptrs.o -fopenmp -std=c++14
```

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_xdot.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_xdot.o  
-fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdx.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_dwdx.o  
-fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdp.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_dwdp.o  
-fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdw.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_dwdw.o  
-fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_y.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_0_y.o  
-fopenmp -std=c++14
```

(continues on next page)

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_x_solver.cpp -o build/temp.linux-x86_64-3.8/conversion_-  
reaction_0_x_solver.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dJydy_rowvals.cpp -o build/temp.linux-x86_64-3.8/conversion_-  
reaction_0_dJydy_rowvals.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_sx0.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_-  
0_sx0.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dsigmaydp.cpp -o build/temp.linux-x86_64-3.8/conversion_-  
reaction_0_dsigmaydp.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D_  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c wrapfunctions.cpp -o build/temp.linux-x86_64-3.8/wrapfunctions.o -fopenmp -  
-std=c++14
```

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxdotdx_explicit_rowvals.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_dxdotdx_explicit_rowvals.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxdotdw_colptrs.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_dxdotdw_colptrs.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_x_rdata.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_x_rdata.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxdotdp_explicit.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_dxdotdp_explicit.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_sx0_fixedParameters.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_sx0_fixedParameters.o -fopenmp -std=c++14
```

(continues on next page)

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxdotdp_explicit_colptrs.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_dxdotdp_explicit_colptrs.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdx_colptrs.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_dwdx_colptrs.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdp_colptrs.cpp -o build/temp.linux-x86_64-3.8/conversion_  
reaction_0_dwdp_colptrs.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_x0_fixedParameters.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_x0_fixedParameters.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
_FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dxdotdw_rowvals.cpp -o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_dxdotdw_rowvals.o -fopenmp -std=c++14
```

(continues on next page)

(continued from previous page)

```
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
-FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dJydy.cpp -o build/temp.linux-x86_64-3.8/conversion_-  
reaction_0_dJydy.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
-FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdx_rowvals.cpp -o build/temp.linux-x86_64-3.8/conversion_-  
reaction_0_dwdx_rowvals.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
-FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_root.cpp -o build/temp.linux-x86_64-3.8/conversion_reaction_-  
0_root.o -fopenmp -std=c++14  
x86_64-linux-gnu-gcc -pthread -Wno-unused-result -Wsign-compare -DNDEBUG -g -fwrapv -  
-O2 -Wall -g -fstack-protector-strong -Wformat -Werror=format-security -g -fwrapv -  
-O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -D  
-FORTIFY_SOURCE=2 -fPIC -I/home/elba/Downloads/pyPESTO/doc/example/amici_models/  
conversion_reaction_0 -I/usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-  
linux-x86_64.egg/amici/include -I/usr/local/lib/python3.8/dist-packages/amici-0.11.  
13-py3.8-linux-x86_64.egg/amici/ThirdParty/gsl -I/usr/local/lib/python3.8/dist-  
packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/ThirdParty/sundials/include -I/  
usr/local/lib/python3.8/dist-packages/amici-0.11.13-py3.8-linux-x86_64.egg/amici/  
ThirdParty/SuiteSparse/include -I/usr/include/hdf5/serial -I/usr/include/python3.8 -  
c conversion_reaction_0_dwdw_rowvals.cpp -o build/temp.linux-x86_64-3.8/conversion_-  
reaction_0_dwdw_rowvals.o -fopenmp -std=c++14  
x86_64-linux-gnu-g++ -pthread -shared -Wl,-O1 -Wl,-Bsymbolic-functions -Wl,-Bsymbolic-  
functions -Wl,-z,relro -g -fwrapv -O2 -Wl,-Bsymbolic-functions -Wl,-z,relro -g -  
fwrapv -O2 -g -fstack-protector-strong -Wformat -Werror=format-security -Wdate-time -  
-D_FORTIFY_SOURCE=2 build/temp.linux-x86_64-3.8/swig/conversion_reaction_0_wrap.o  
build/temp.linux-x86_64-3.8/conversion_reaction_0_Jy.o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_deltasx.o build/temp.linux-x86_64-3.8/conversion_reaction_0_-  
dxdotdp_explicit_rowvals.o build/temp.linux-x86_64-3.8/conversion_reaction_0_-  
dxdotdw.o build/temp.linux-x86_64-3.8/conversion_reaction_0_dwdp_rowvals.o build/  
temp.linux-x86_64-3.8/conversion_reaction_0_w.o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_dydx.o build/temp.linux-x86_64-3.8/conversion_reaction_0_-  
o build/temp.linux-x86_64-3.8/conversion_reaction_0_x0.o build/temp.linux-x86_64-3.  
8/conversion_reaction_0_total_c1.o build/temp.linux-x86_64-3.8/conversion_reaction_-  
0_dwdw_colptrs.o build/temp.linux-x86_64-3.8/conversion_reaction_0_dydsigmay.o  
build/temp.linux-x86_64-3.8/conversion_reaction_0_dxdotdx_explicit.o build/temp.  
linux-x86_64-3.8/conversion_reaction_0_dydp.o build/temp.linux-x86_64-3.8/  
conversion_reaction_0_sigmay.o build/temp.linux-x86_64-3.8/conversion_reaction_0.o
```

(continued from previous page)


Commonly, as a first step, optimization is performed, in order to find good parameter point estimates.

```
[2]: %time
      result = optimize.minimize(problem, n_starts=10)

Parameters obtained from history and optimizer do not match: [ -0.91617976 -10.
-39367452], [ -0.9161923 -10.39367204]

CPU times: user 2.21 s, sys: 406 ms, total: 2.62 s
Wall time: 2.06 s
```

```
[3]: ax = visualize.waterfall(result, size=(4,4))
```

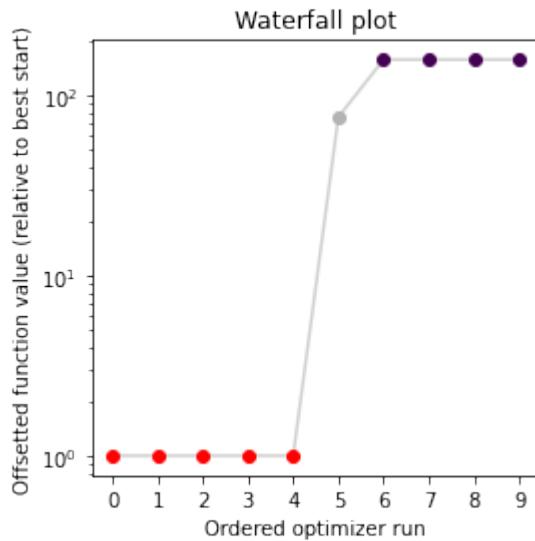

Next, we perform sampling. Here, we employ a `pypesto.sample.AdaptiveParallelTemperingSampler` sampler, which runs Markov Chain Monte Carlo (MCMC) chains on different temperatures. For each chain, we employ a `pypesto.sample.AdaptiveMetropolisSampler`. For more on the samplers see below or the API documentation.

```
[4]: sampler = sample.AdaptiveParallelTemperingSampler(
    internal_sampler=sample.AdaptiveMetropolisSampler(),
    n_chains=3)
```

For the actual sampling, we call the `pypesto.sample.sample` function. By passing the `result` object to the function, the previously found global optimum is used as starting point for the MCMC sampling.

```
[5]: %time
      result = sample.sample(problem, n_samples=10000, sampler=sampler, result=result)

100%|| 10000/10000 [00:55<00:00, 179.06it/s]


CPU times: user 1min, sys: 9.35 s, total: 1min 9s
Wall time: 55.9 s
```

When the sampling is finished, we can analyse our results. A first thing to do is to analyze the sampling burn-in:

```
[6]: sample.geweke_test(result)
[6]: 0
```


pyPESTO provides functions to analyse both the sampling process as well as the obtained sampling result. Visualizing the traces e.g. allows to detect burn-in phases, or fine-tune hyperparameters. First, the parameter trajectories can be visualized:

```
[7]: sample.geweke_test(result)
ax = visualize.sampling_parameter_traces(result, use_problem_bounds=False)
```

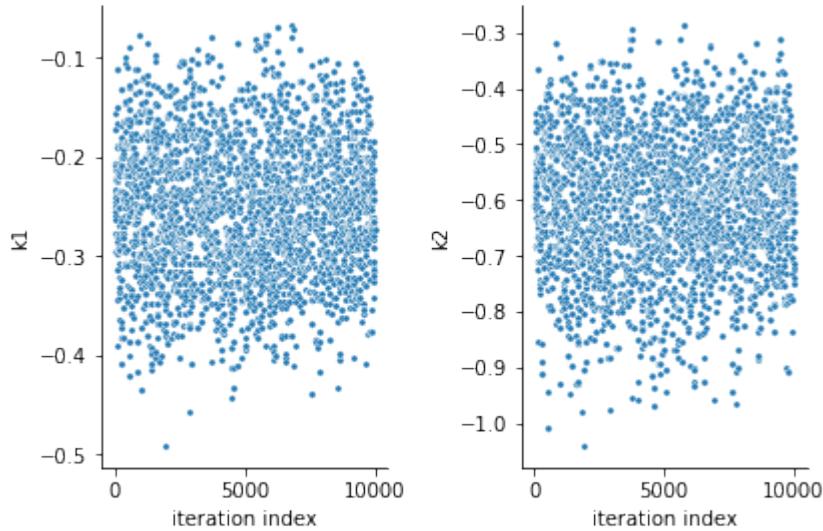


Next, also the log posterior trace can be visualized:

```
[8]: ax = visualize.sampling_fval_traces(result)
```

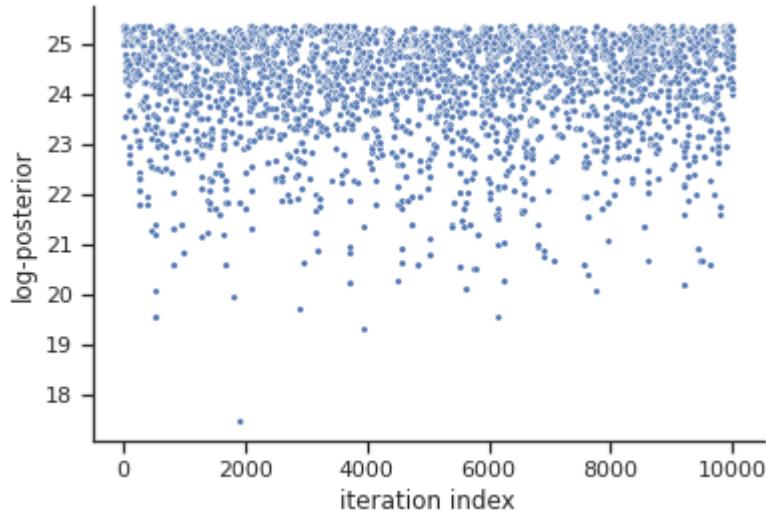


To visualize the result, there are various options. The scatter plot shows histograms of 1-dim parameter marginals and scatter plots of 2-dimensional parameter combinations:


```
[9]: ax = visualize.sampling_scatter(result, size=[13, 6])
```

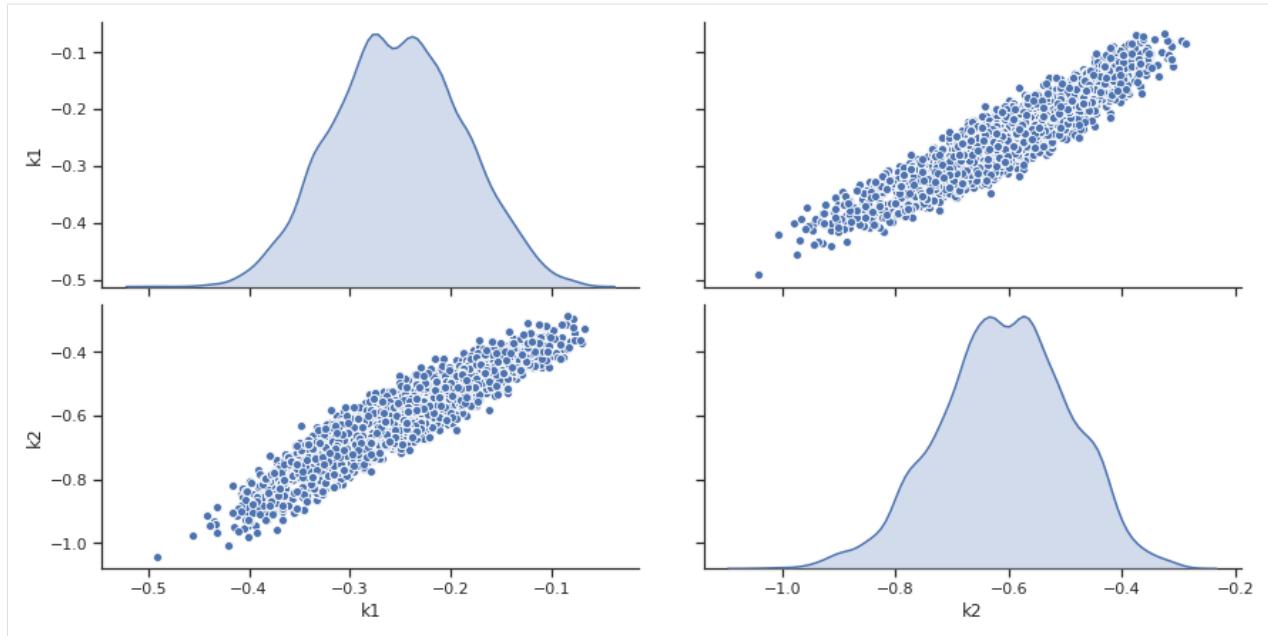

`sampling_1d_marginals` allows to plot e.g. kernel density estimates or histograms (internally using `seaborn`):

```
[10]: for i_chain in range(len(result.sample_result.betas)):
    visualize.sampling_1d_marginals(
        result, i_chain=i_chain, suptitle=f"Chain: {i_chain}")
```

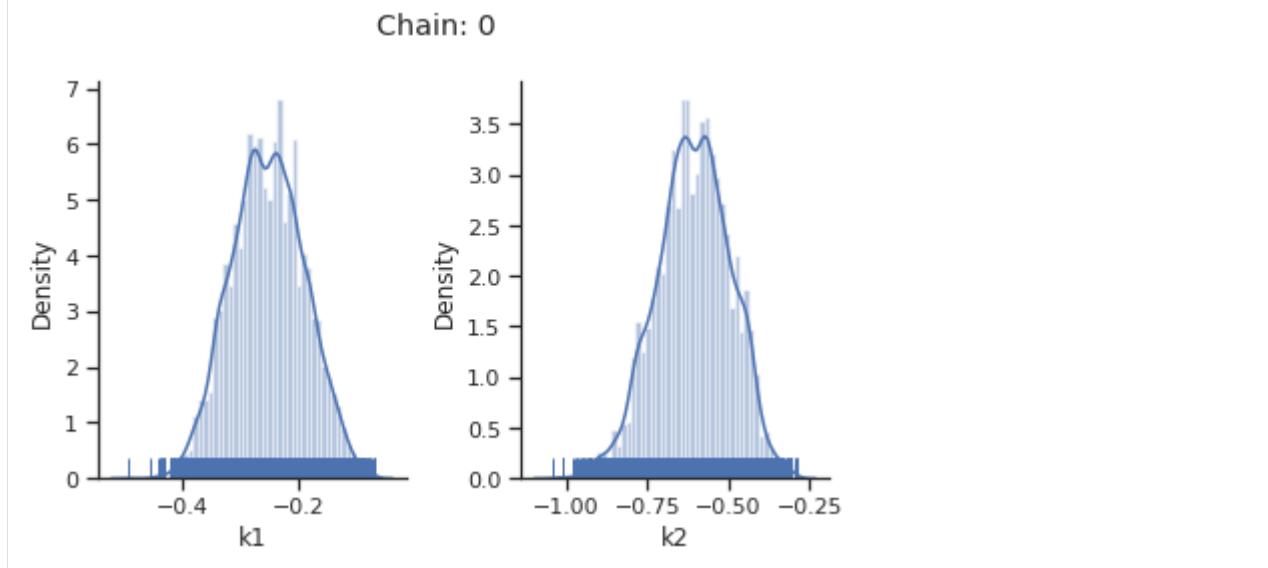

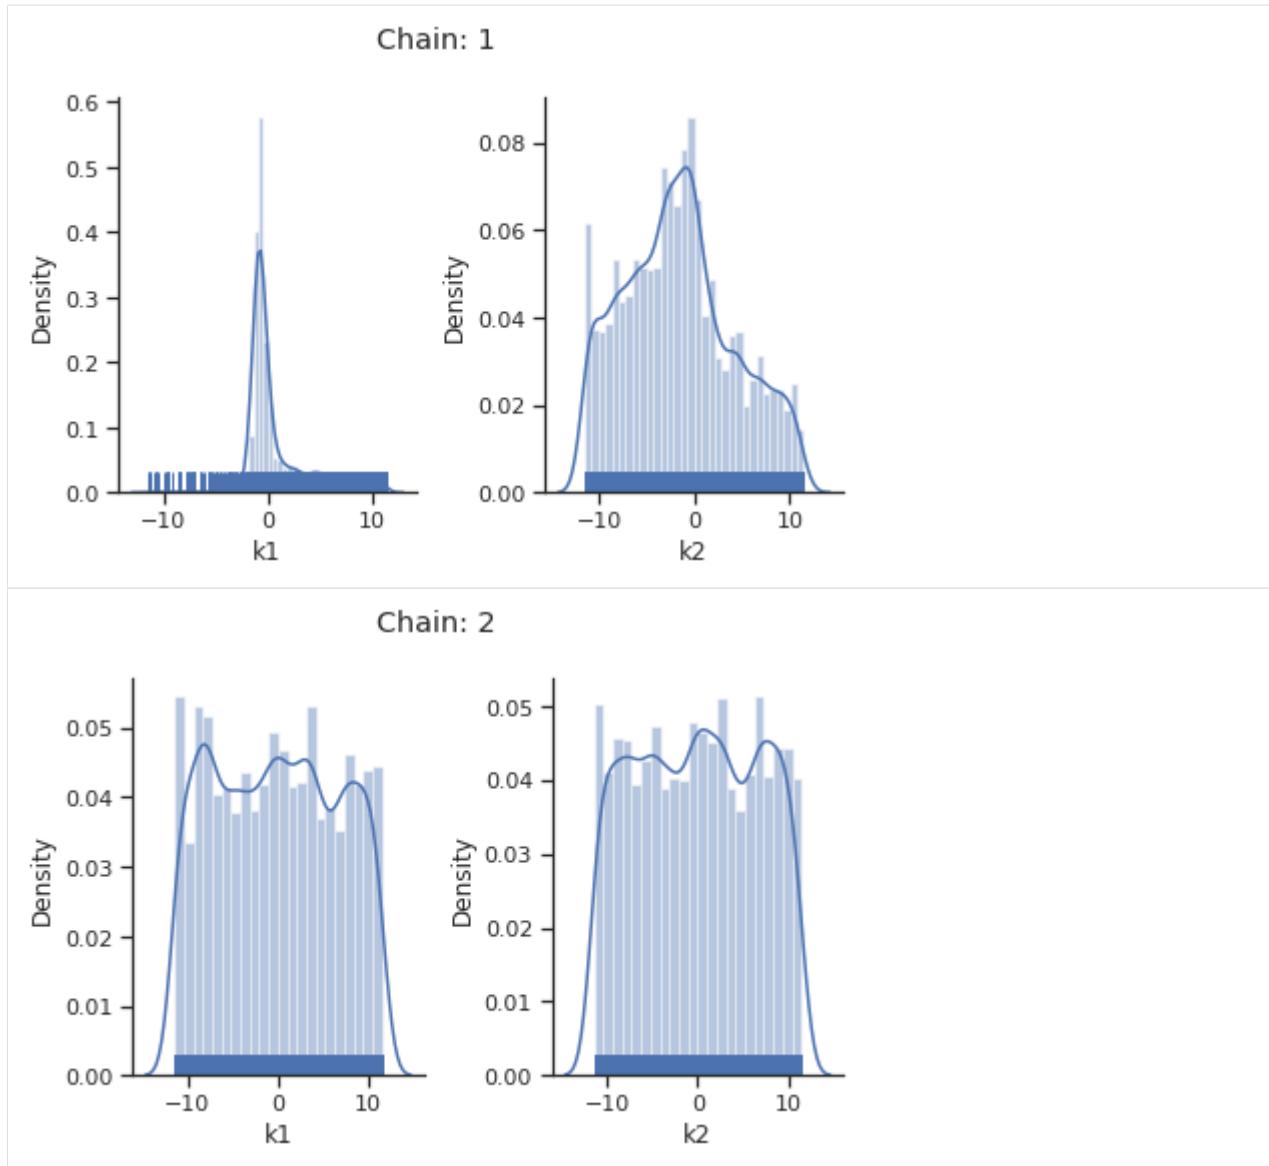

That's it for the moment on using the sampling pipeline.

2.7.2 1-dim test problem

To compare and test the various implemented samplers, we first study a 1-dimensional test problem of a gaussian mixture density, together with a flat prior.

```
[1]: import numpy as np
from scipy.stats import multivariate_normal
import seaborn as sns
import pypesto
import pypesto.sample as sample
import pypesto.visualize as visualize

def density(x):
    return 0.3*multivariate_normal.pdf(x, mean=-1.5, cov=0.1) + \
    0.7*multivariate_normal.pdf(x, mean=1.5, cov=0.1)
```

(continues on next page)

(continued from previous page)

```

0.7 *multivariate_normal.pdf(x, mean=2.5, cov=0.2)

def nllh(x):
    return - np.log(density(x))


objective = pypesto.Objective(fun=nllh)
problem = pypesto.Problem(
    objective=objective, lb=-4, ub=5, x_names=[ 'x' ])

```

The likelihood has two separate modes:

```
[2]: xs = np.linspace(-4, 5, 100)
ys = [density(x) for x in xs]

ax = sns.lineplot(xs, ys, color='C1')
```

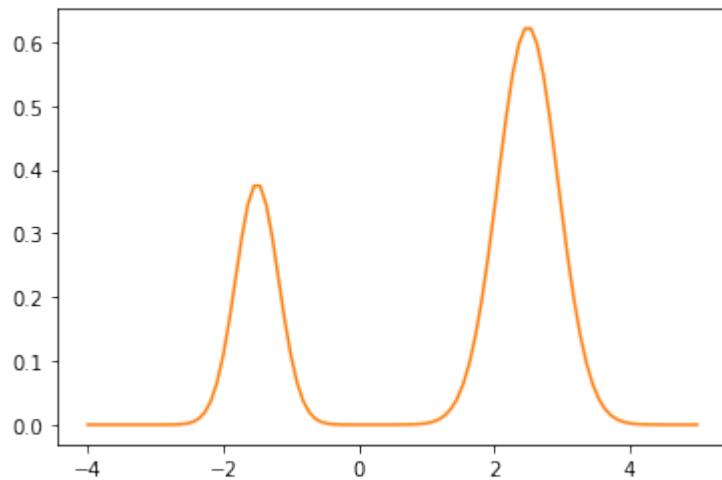

Metropolis sampler

For this problem, let us try out the simplest sampler, the `pypesto.sample.MetropolisSampler`.


```
[13]: %%time
sampler = sample.MetropolisSampler({'std': 0.5})
result = sample.sample(problem, 1e4, sampler, x0=np.array([0.5]))

100%| 10000/10000 [00:03<00:00, 2774.43it/s]

CPU times: user 3.65 s, sys: 194 ms, total: 3.84 s
Wall time: 3.62 s
```

```
[14]: sample.geweke_test(result)
ax = visualize.sampling_1d_marginals(result)
ax[0][0].plot(xs, ys)
```

```
[14]: [<matplotlib.lines.Line2D at 0x7f8466613f40>]
```

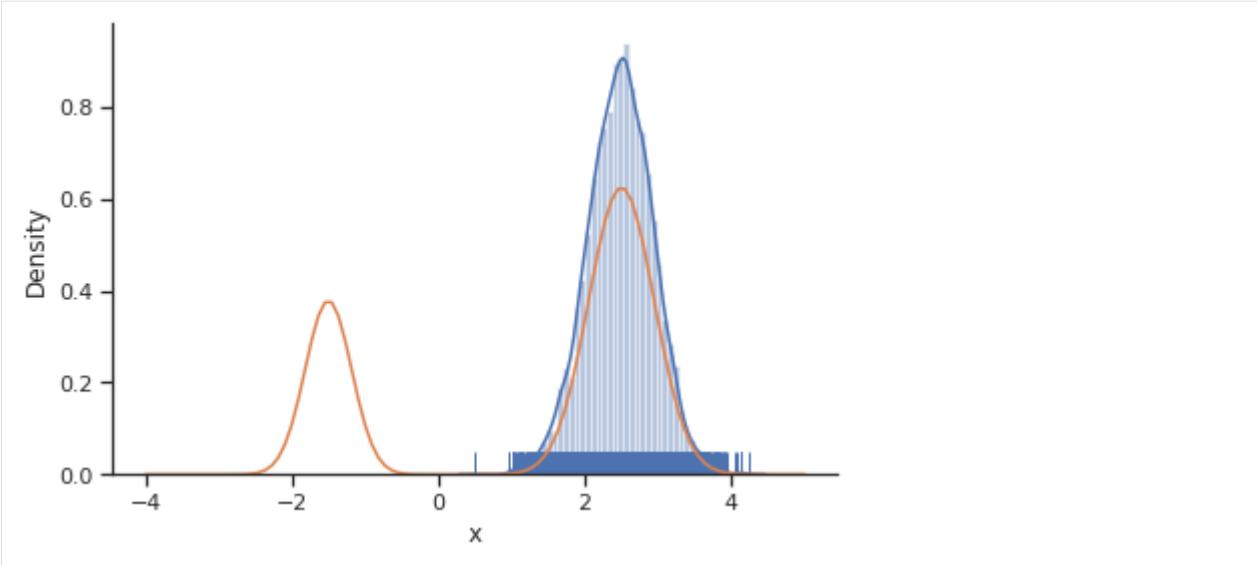


The obtained posterior does not accurately represent the distribution, often only capturing one mode. This is because it is hard for the Markov chain to jump between the distribution's two modes. This can be fixed by choosing a higher proposal variation std:

```
[15]: %time
sampler = sample.MetropolisSampler({'std': 1})
result = sample.sample(problem, 1e4, sampler, x0=np.array([0.5]))
100%| 10000/10000 [00:03<00:00, 2849.08it/s]
CPU times: user 3.55 s, sys: 190 ms, total: 3.74 s
Wall time: 3.52 s
```

```
[16]: sample.geweke_test(result)
ax = visualize.sampling_1d_marginals(result)
ax[0][0].plot(xs, ys)
```

```
[16]: [matplotlib.lines.Line2D at 0x7f844ffffcdf0>]
```

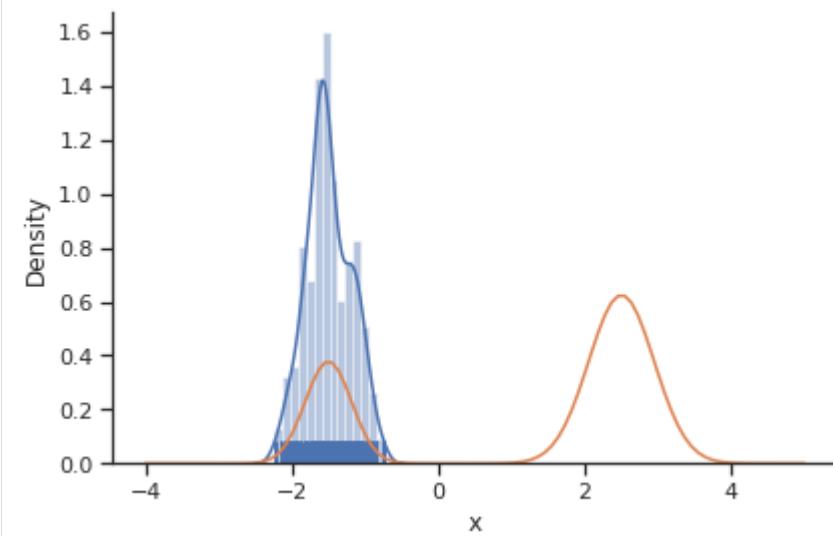

In general, MCMC have difficulties exploring multimodel landscapes. One way to overcome this is to use parallel tempering. There, various chains are run, lifting the densities to different temperatures. At high temperatures, proposed steps are more likely to get accepted and thus jumps between modes more likely.

Parallel tempering sampler


In pyPESTO, the most basic parallel tempering algorithm is the `pypesto.sample.ParallelTemperingSampler`. It takes an `internal_sampler` parameter, to specify what sampler to use for performing sampling the different chains. Further, we can directly specify what inverse temperatures `betas` to use. When not specifying the `betas` explicitly but just the number of chains `n_chains`, an established near-exponential decay scheme is used.


```
[17]: %%time
sampler = sample.ParallelTemperingSampler(
    internal_sampler=sample.MetropolisSampler(),
    betas=[1, 1e-1, 1e-2])
result = sample.sample(problem, 1e4, sampler, x0=np.array([0.5]))

100%| 10000/10000 [00:11<00:00, 863.05it/s]

CPU times: user 11.8 s, sys: 621 ms, total: 12.4 s
Wall time: 11.6 s
```

```
[18]: sample.geweke_test(result)
for i_chain in range(len(result.sample_result.betas)):
    visualize.sampling_1d_marginals(
        result, i_chain=i_chain, suptitle=f"Chain: {i_chain}")
```

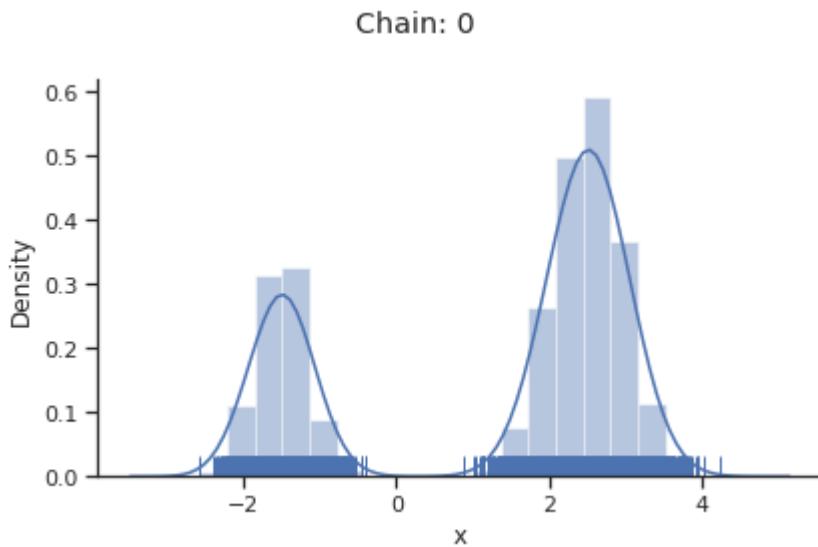

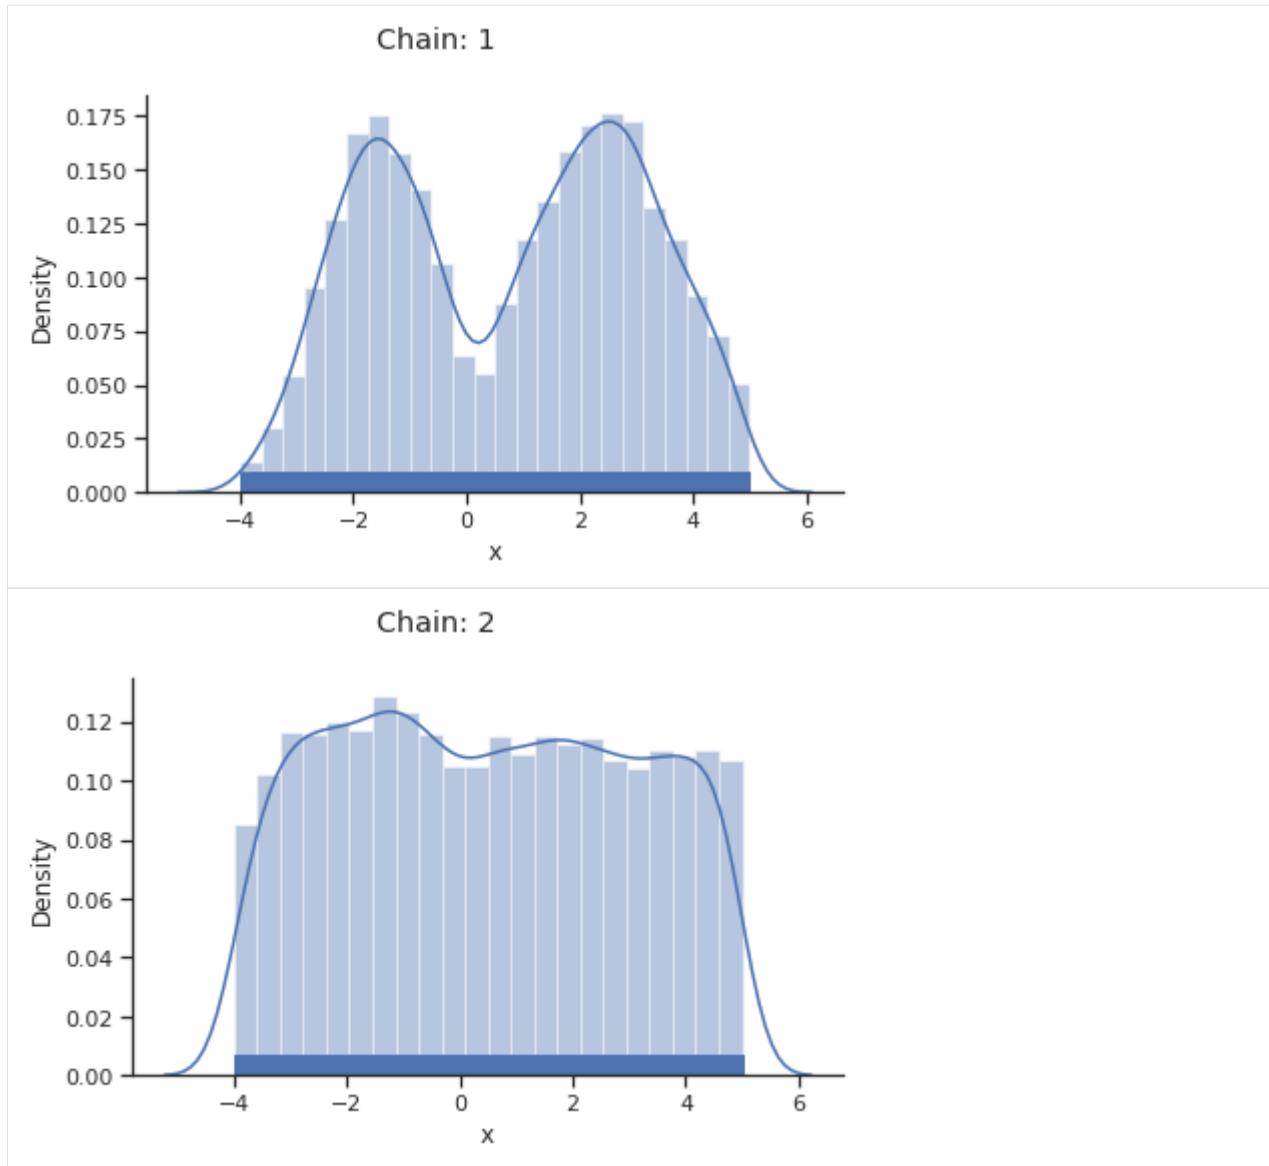


Of interest is here finally the first chain at index `i_chain=0`, which approximates the posterior well.

Adaptive Metropolis sampler

The problem of having to specify the proposal step variation manually can be overcome by using the `pypesto.sample.AdaptiveMetropolisSampler`, which iteratively adjusts the proposal steps to the function landscape.

```
[19]: %time
sampler = sample.AdaptiveMetropolisSampler()
result = sample.sample(problem, 1e4, sampler, x0=np.array([0.5]))
100%| 10000/10000 [00:04<00:00, 2337.47it/s]
CPU times: user 4.35 s, sys: 55.4 ms, total: 4.41 s
Wall time: 4.3 s
```

```
[20]: sample.geweke_test(result)
ax = visualize.sampling_1d_marginals(result)
```

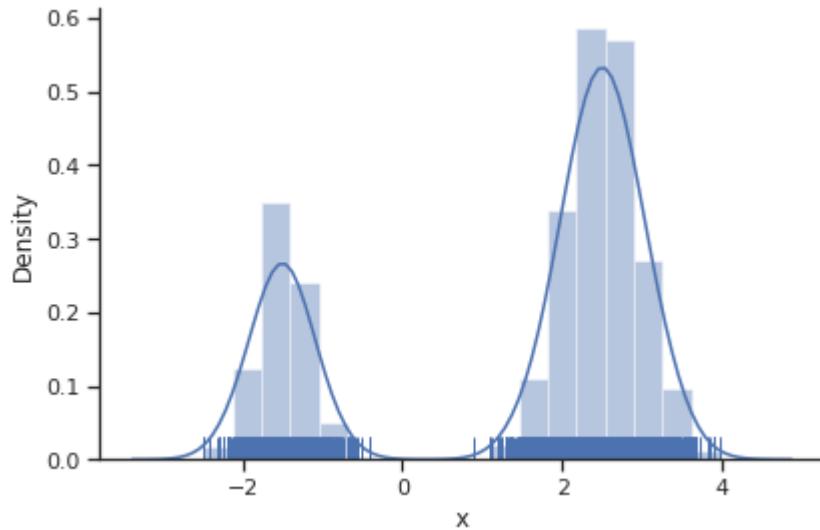

Adaptive parallel tempering sampler


The `pypesto.sample.AdaptiveParallelTemperingSampler` iteratively adjusts the temperatures to obtain good swapping rates between chains.


```
[21]: %%time
sampler = sample.AdaptiveParallelTemperingSampler(
    internal_sampler=sample.AdaptiveMetropolisSampler(), n_chains=3)
result = sample.sample(problem, 1e4, sampler, x0=np.array([0.5]))

100%| 10000/10000 [00:13<00:00, 752.49it/s]

CPU times: user 13.3 s, sys: 91 ms, total: 13.4 s
Wall time: 13.3 s
```

```
[22]: sample.geweke_test(result)
for i_chain in range(len(result.sample_result.betas)):
    visualize.sampling_1d_marginals(
        result, i_chain=i_chain, suptitle=f"Chain: {i_chain}")
```

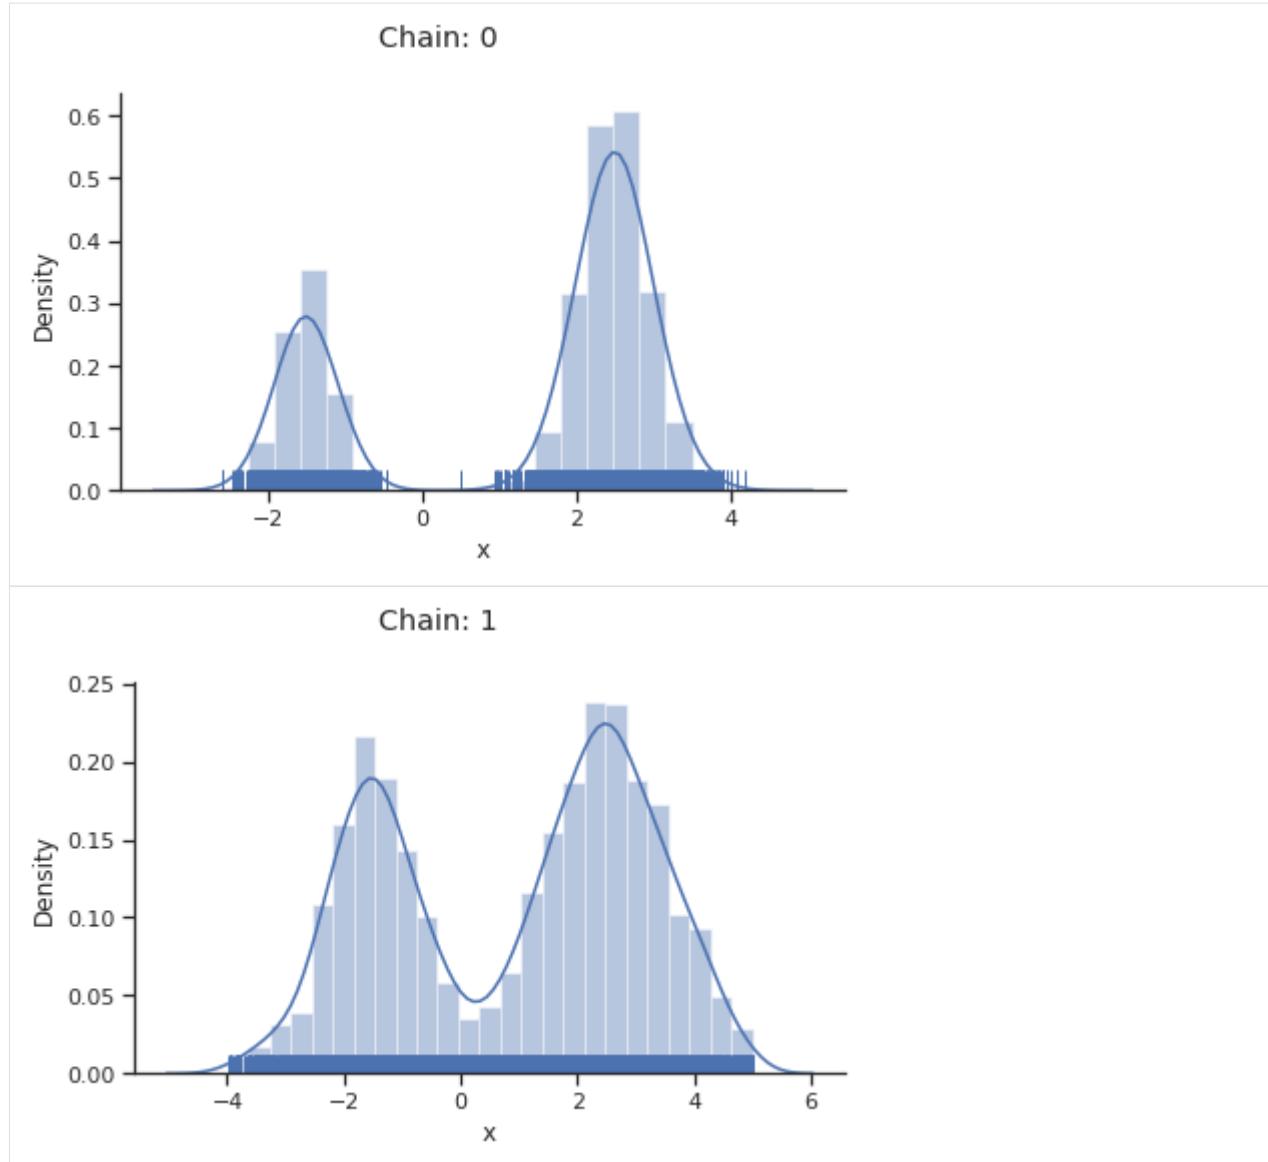

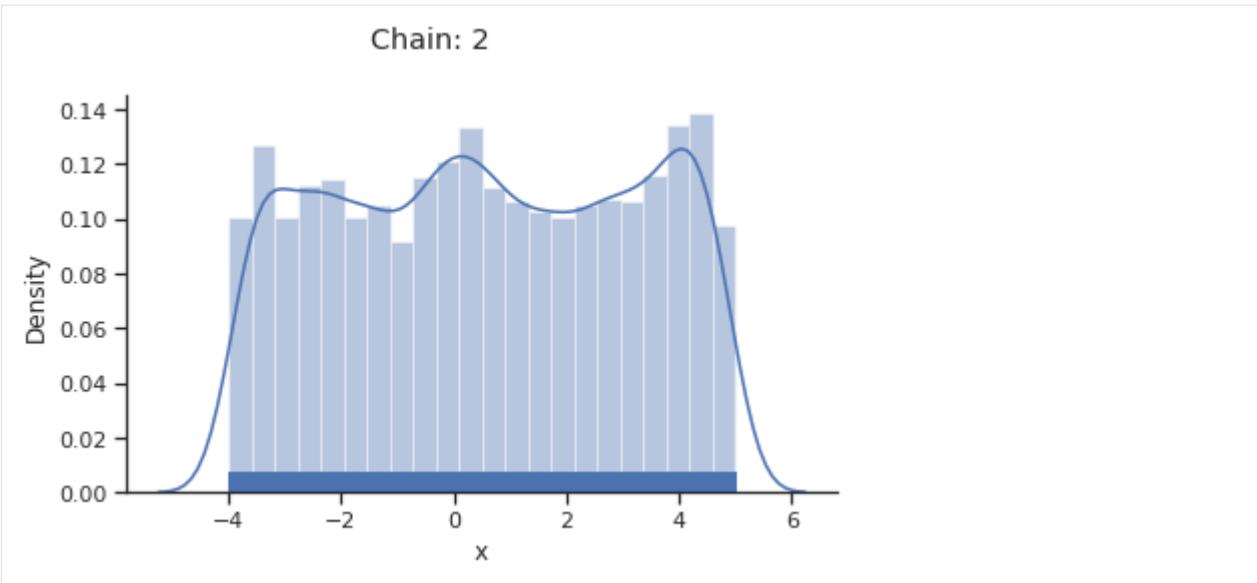

```
[23]: result.sample_result.betas
[23]: array([1.0000000e+00, 2.1503801e-01, 2.0000000e-05])
```


Pymc3 sampler

```
[24]: %%time
sampler = sample.Pymc3Sampler()
result = sample.sample(problem, 1e4, sampler, x0=np.array([0.5]))

Auto-assigning NUTS sampler...
Initializing NUTS using jitter+adapt_diag...
Initializing NUTS failed. Falling back to elementwise auto-assignment.
Sequential sampling (1 chains in 1 job)
Slice: [x]
Sampling chain 0, 0 divergences: 100%|| 10500/10500 [00:25<00:00, 407.36it/s]
Only one chain was sampled, this makes it impossible to run some convergence checks

CPU times: user 29.2 s, sys: 860 ms, total: 30.1 s
Wall time: 30.8 s
```

```
[25]: sample.geweke_test(result)
for i_chain in range(len(result.sample_result.betas)):
    visualize.sampling_1d_marginals(
        result, i_chain=i_chain, suptitle=f"Chain: {i_chain}")
```

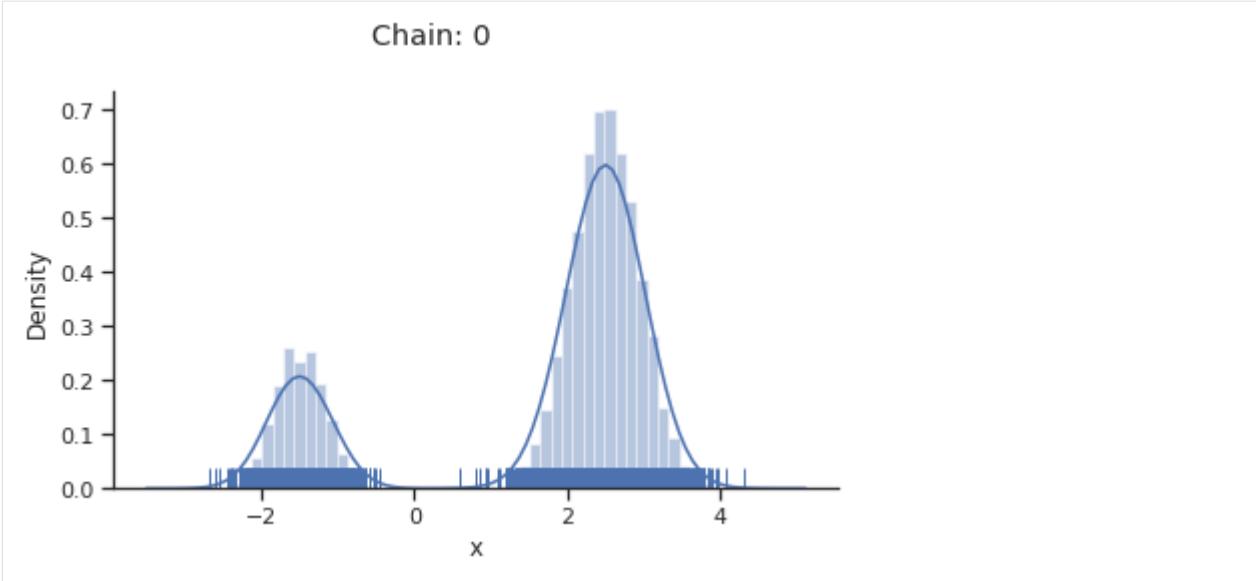


If not specified, pymc3 chooses an adequate sampler automatically.

Emcee sampler

```
[4]: %%time
sampler = sample.EmceeSampler(nwalkers=10, run_args={'progress': True})
result = sample.sample(problem, 1e4, sampler, x0=np.array([0.5]))
100%| 10000/10000 [00:35<00:00, 278.38it/s]
CPU times: user 35.8 s, sys: 344 ms, total: 36.2 s
Wall time: 35.9 s
```

```
[5]: sample.geweke_test(result)
for i_chain in range(len(result.sample_result.betas)):
    visualize.sampling_1d_marginals(
        result, i_chain=i_chain, suptitle=f"Chain: {i_chain}")
```

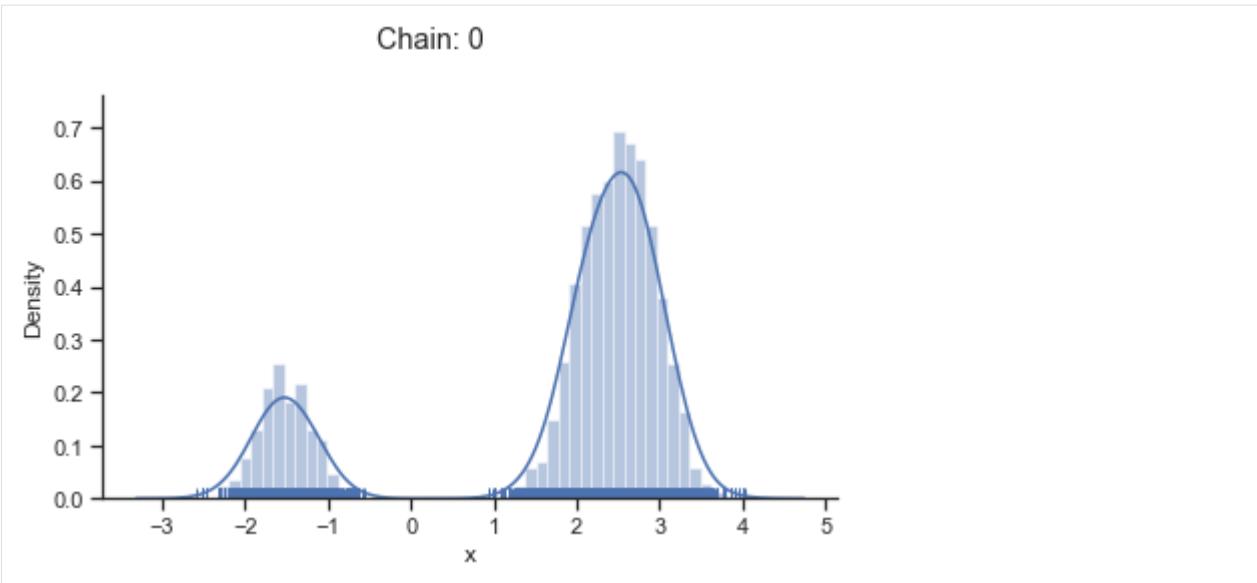

2.7.3 2-dim test problem: Rosenbrock banana

The adaptive parallel tempering sampler with chains running adaptive Metropolis samplers is also able to sample from more challenging posterior distributions. To illustrates this shortly, we use the Rosenbrock function.

```
[26]: import scipy.optimize as so
import pypesto

# first type of objective
objective = pypesto.Objective(fun=so.rosen)

dim_full = 4
lb = -5 * np.ones((dim_full, 1))
ub = 5 * np.ones((dim_full, 1))


problem = pypesto.Problem(objective=objective, lb=lb, ub=ub)
```


```
[27]: %%time
sampler = sample.AdaptiveParallelTemperingSampler(
    internal_sampler=sample.AdaptiveMetropolisSampler(), n_chains=10)
result = sample.sample(problem, 1e4, sampler, x0=np.zeros(dim_full))

100%| 10000/10000 [00:35<00:00, 279.44it/s]

CPU times: user 35.6 s, sys: 47.5 ms, total: 35.7 s
Wall time: 35.9 s
```

```
[28]: sample.geweke_test(result)
ax = visualize.sampling_scatter(result)
ax = visualize.sampling_1d_marginals(result)
```

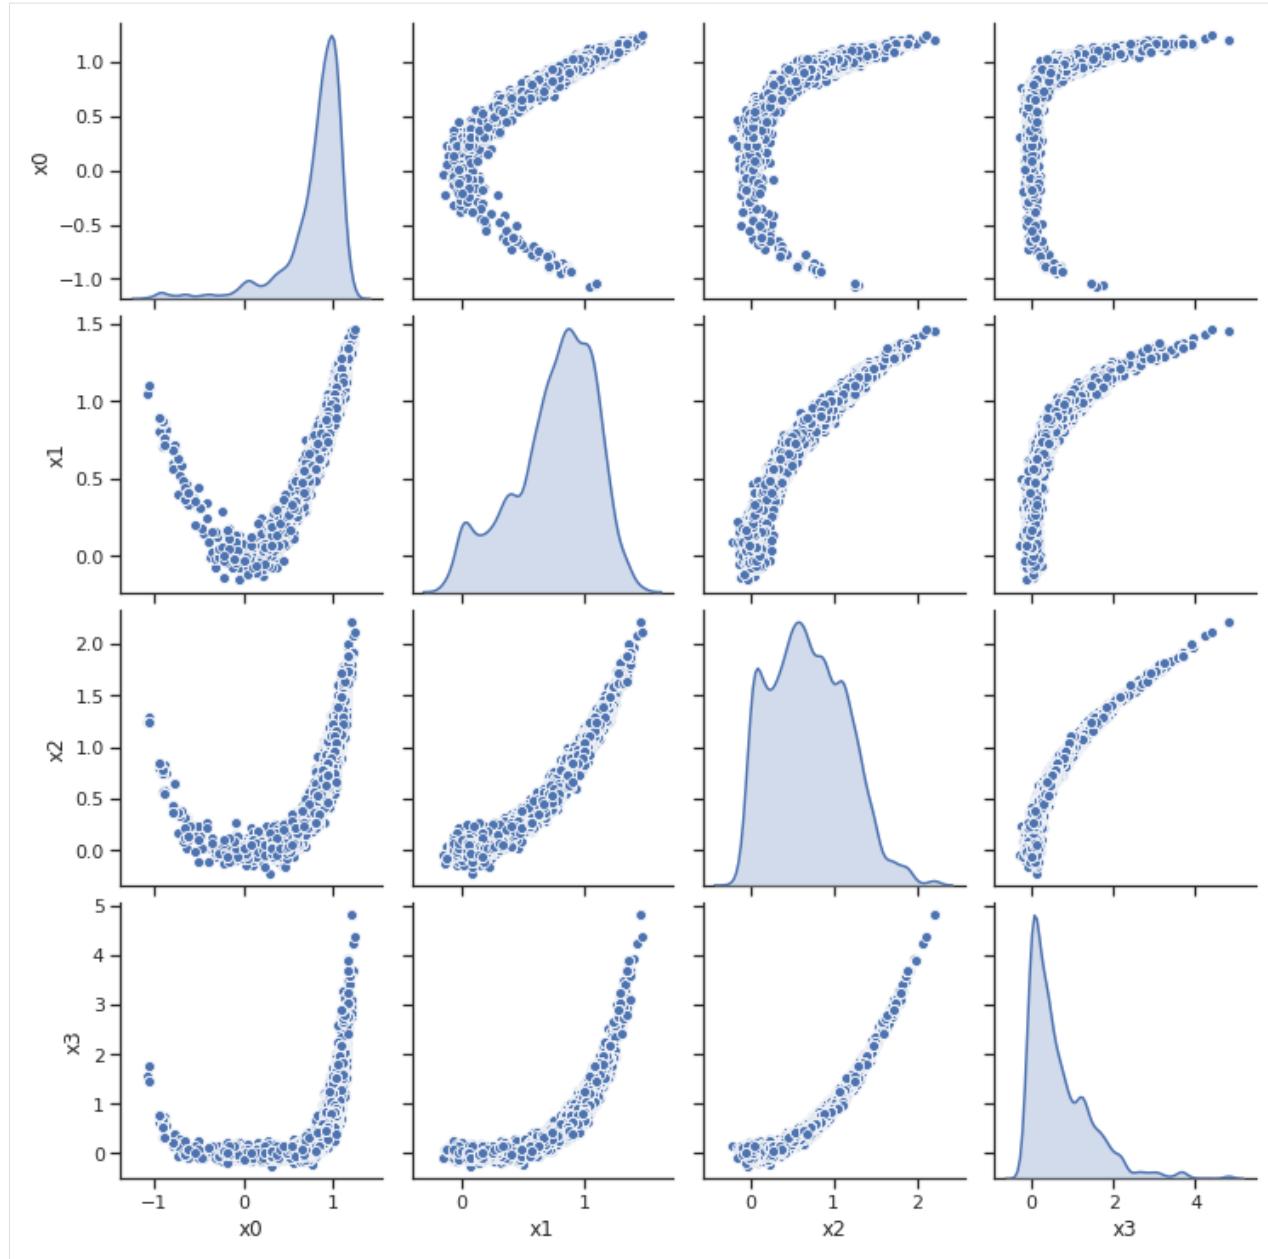

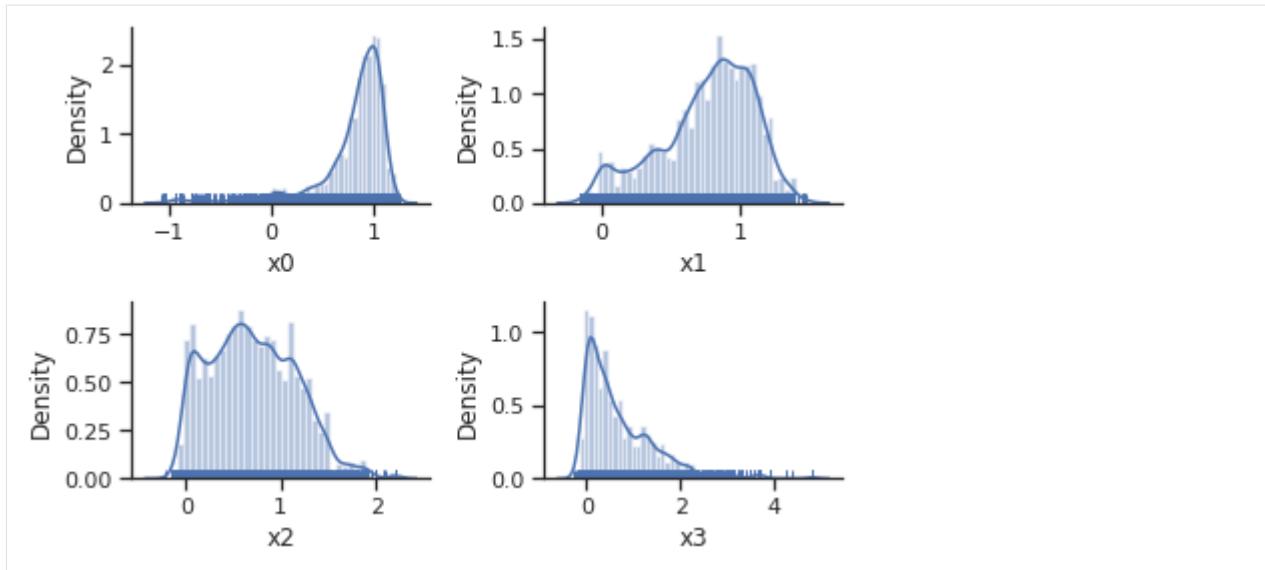

2.8 MCMC sampling diagnostics

In this notebook, we illustrate how to assess the quality of your MCMC samples, e.g. convergence and auto-correlation, in pyPESTO.

```
[ ]: # install if not done yet
# !apt install libatlas-base-dev swig
# %pip install pypesto[amici,petab] --quiet
```

2.8.1 The pipeline

First, we load the model and data to generate the MCMC samples from. In this example we show a toy example of a conversion reaction, loaded as a PETab problem.

```
[1]: import pypesto
import pypesto.petab
import pypesto.optimize as optimize
import pypesto.sample as sample
import pypesto.visualize as visualize

import petab
import numpy as np
import logging
import matplotlib.pyplot as plt

# log diagnostics
logger = logging.getLogger("pypesto.sample.diagnostics")
logger.setLevel(logging.INFO)
logger.addHandler(logging.StreamHandler())

# import to petab
petab_problem = petab.Problem.from_yaml(
    "conversion_reaction/multiple_conditions/conversion_reaction.yaml")
```

(continues on next page)

(continued from previous page)

```
# import to pypesto
importer = pypesto.petab.PetabImporter(petab_problem)
# create problem
problem = importer.create_problem()
```

Create the sampler object, in this case we will use adaptive parallel tempering with 3 temperatures.


```
[2]: sampler = sample.AdaptiveParallelTemperingSampler(
    internal_sampler=sample.AdaptiveMetropolisSampler(),
    n_chains=3)
```

First, we will initiate the MCMC chain at a “random” point in parameter space, e.g. $\theta_{start} = [3, -4]$

```
[3]: result = sample.sample(problem, n_samples=10000, sampler=sampler, x0=np.array([3, -4]))
elapsed_time = result.sample_result.time
print(f'Elapsed time: {round(elapsed_time, 2)} s')

100%| 10000/10000 [00:44<00:00, 225.23it/s]
Elapsed time: 54.85
```


```
[4]: ax = visualize.sampling_parameter_traces(result, use_problem_bounds=False, size=(12, 5))
```

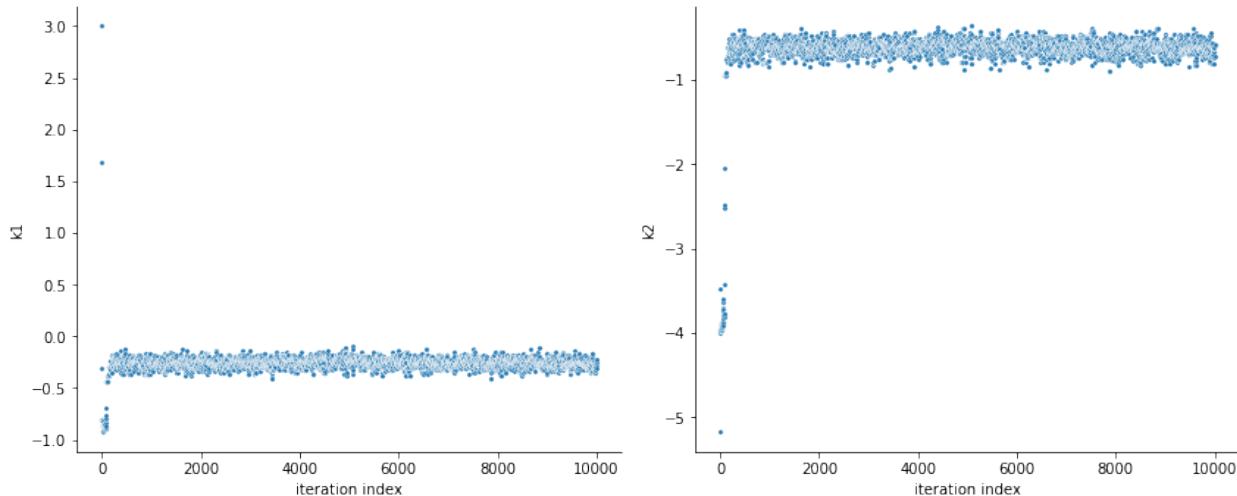


By visualizing the chains, we can see a warm up phase occurring until convergence of the chain is reached. This is commonly known as “burn in” phase and should be discarded. An automatic way to evaluate and find the index of the chain in which the warm up is finished can be done by using the Geweke test.

```
[5]: sample.geweke_test(result=result)
ax = visualize.sampling_parameter_traces(result, use_problem_bounds=False, size=(12, 5))

Geweke burn-in index: 500
```

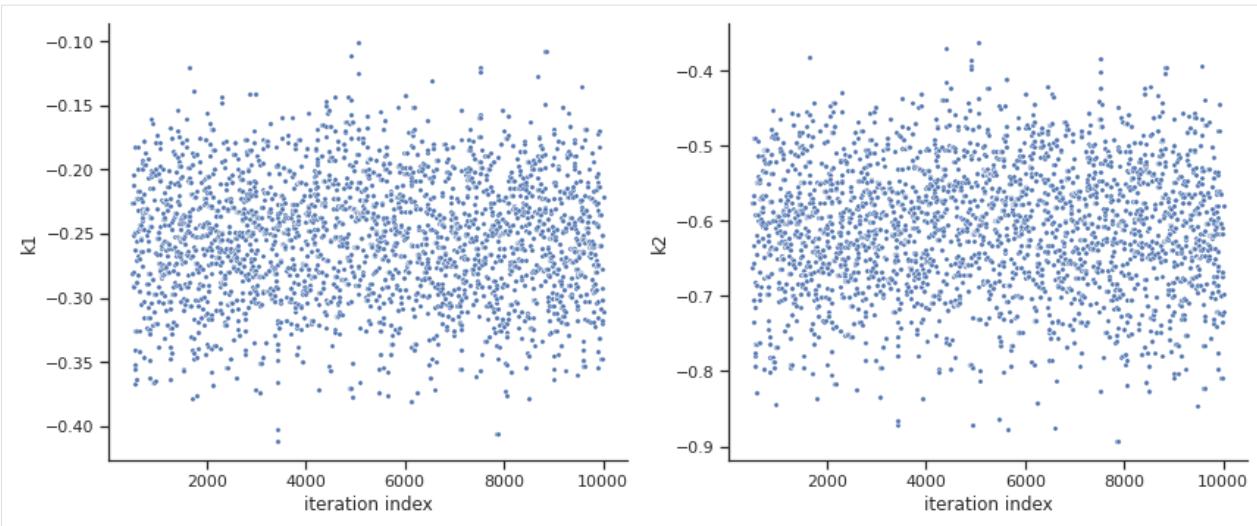

```
[6]: ax = visualize.sampling_parameter_traces(result, use_problem_bounds=False, full_trace=True, size=(12,5))
```

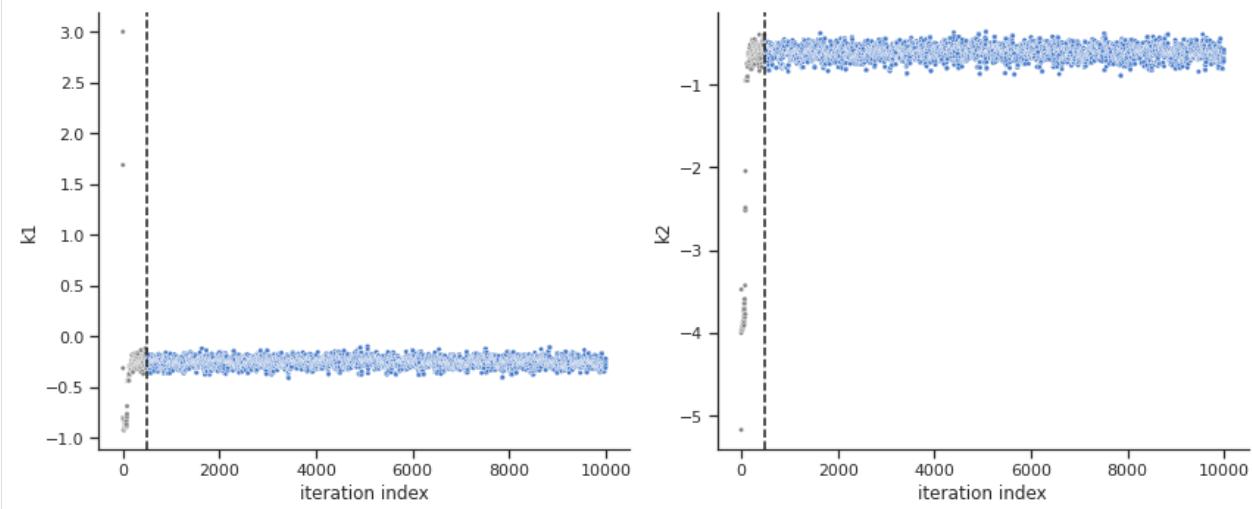


Calculate the effective sample size per computation time. We save the results in a variable as we will compare them later.

```
[7]: sample.effective_sample_size(result=result)
ess = result.sample_result.effective_sample_size
print(f'Effective sample size per computation time: {round(ess/elapsed_time,2)}')

Estimated chain autocorrelation: 8.482536903793251
Estimated effective sample size: 1001.947062942551

Effective sample size per computation time: 18.27
```

```
[8]: alpha = [99, 95, 90]
ax = visualize.sampling_parameter_cis(result, alpha=alpha, size=(10,5))
```

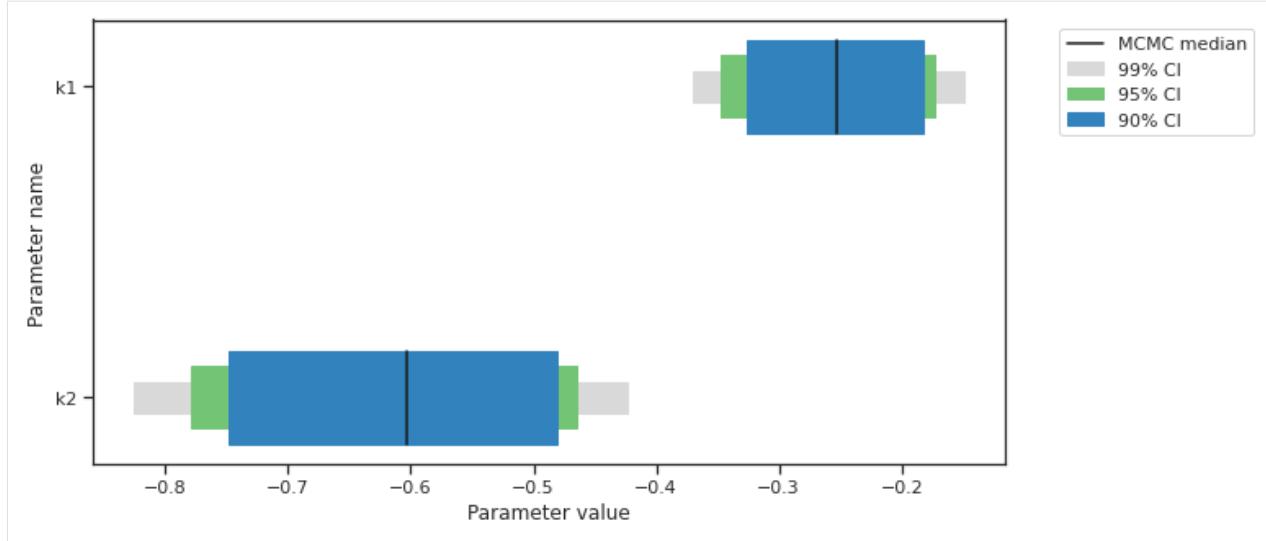

Predictions can be performed by creating a parameter ensemble from the sample, then applying a predictor to the ensemble. The predictor requires a simulation tool. Here, `AMICI` is used. First, the predictor is setup.

```
[9]: from pypesto.predict.constants import AMICI_STATUS, AMICI_T, AMICI_X, AMICI_Y
from pypesto.predict import AmiciPredictor

# This post_processor will transform the output of the simulation tool
# such that the output is compatible with the next steps.
def post_processor(amici_outputs, output_type, output_ids):
    outputs = [
        amici_output[output_type] if amici_output[AMICI_STATUS] == 0
        else np.full((len(amici_output[AMICI_T]), len(output_ids)), np.nan)
        for amici_output in amici_outputs
    ]
    return outputs

# Setup post-processors for both states and observables.
from functools import partial
amici_objective = result.problem.objective
state_ids = amici_objective.amici_model.getStateIds()
observable_ids = amici_objective.amici_model.getObservableIds()
post_processor_x = partial(
    post_processor,
    output_type=AMICI_X,
    output_ids=state_ids,
)
post_processor_y = partial(
    post_processor,
    output_type=AMICI_Y,
    output_ids=observable_ids,
)

# Create pyPESTO predictors for states and observables
predictor_x = AmiciPredictor(
    amici_objective,
    post_processor=post_processor_x,
```

(continues on next page)

(continued from previous page)

```

        output_ids=state_ids,
)
predictor_y = AmiciPredictor(
    amici_objective,
    post_processor=post_processor_y,
    output_ids=observable_ids,
)

```

Next, the ensemble is created.

```
[10]: from pypesto.ensemble import Ensemble, EnsembleType

# corresponds to only the estimated parameters
x_names = result.problem.get_reduced_vector(result.problem.x_names)

# Create the ensemble with the MCMC chain from parallel tempering with the real
# temperature.
ensemble = Ensemble.from_sample(
    result,
    chain_slice=slice(None, None, 2), # Optional argument: only use every second
    # vector in the chain.
    x_names=x_names,
    ensemble_type=EnsembleType.sample,
    lower_bound=result.problem.lb,
    upper_bound=result.problem.ub
)
```

The predictor is then applied to the ensemble to generate predictions.

```
[11]: from pypesto.engine import MultiProcessEngine

# Currently, parallelization of predictions is supported with the
# `pypesto.engine.MultiProcessEngine` and `pypesto.engine.MultiThreadEngine`
# engines. If no engine is specified, the `pypesto.engine.SingleCoreEngine`
# engine is used.
engine = MultiProcessEngine()

ensemble_prediction = ensemble.predict(predictor_x, prediction_id=AMICI_X,
                                         engine=engine)

Engine set up to use up to 8 processes in total. The number was automatically
determined and might not be appropriate on some systems.
100%| 8/8 [00:00<00:00, 641.55it/s]
```

```
[12]: from pypesto.predict.constants import CONDITION, OUTPUT


credibility_interval_levels = [90, 95, 99]

ax = visualize.sampling_prediction_trajectories(
    ensemble_prediction,
    levels=credibility_interval_levels,
    size=(10,5),
    labels={'A': 'state_A', 'condition_0': 'cond_0'},
    axis_label_padding=60,
    groupby=CONDITION,
    condition_ids=['condition_0', 'condition_1'], # `None` for all conditions
    output_ids=['A', 'B'], # `None` for all outputs
```


(continues on next page)

(continued from previous page)

)

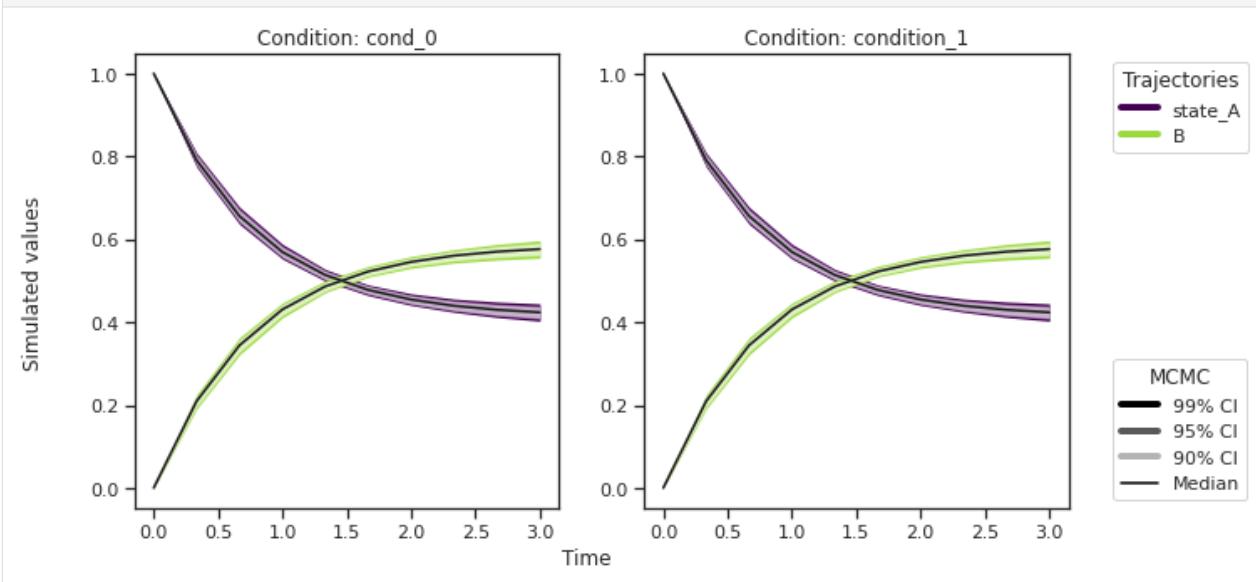

```
[13]: ax = visualize.sampling_prediction_trajectories(
    ensemble_prediction,
    levels=credibility_interval_levels,
    size=(10,5),
    labels={'A': 'obs_A', 'condition_0': 'cond_0'},
    axis_label_padding=60,
    groupby=OUTPUT,
)
```

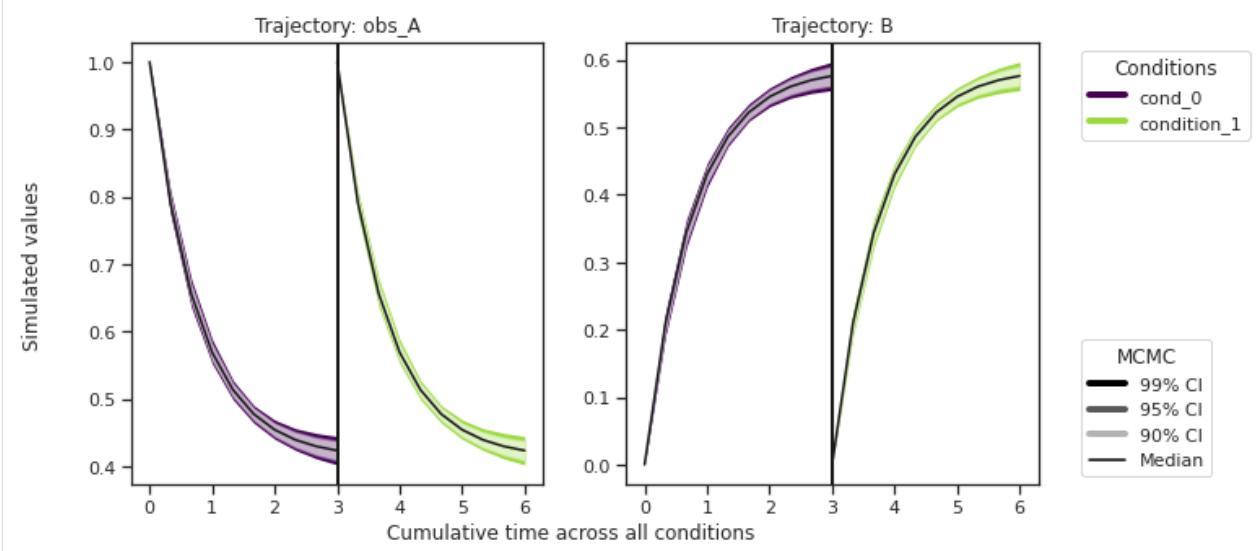

Predictions are stored in `ensemble_prediction.prediction_summary`.

Commonly, as a first step, optimization is performed, in order to find good parameter point estimates.


```
[14]: res = optimize.minimize(problem, n_starts=10)
100%| 10/10 [00:02<00:00, 4.72it/s]
```

By passing the result object to the function, the previously found global optimum is used as starting point for the MCMC sampling.

```
[15]: res = sample.sample(problem, n_samples=10000, sampler=sampler, result=res)
elapsed_time = res.sample_result.time
print('Elapsed time: '+str(round(elapsed_time,2)))
100%| 10000/10000 [00:42<00:00, 237.21it/s]
Elapsed time: 52.21
```


When the sampling is finished, we can analyse our results. pyPESTO provides functions to analyse both the sampling process as well as the obtained sampling result. Visualizing the traces e.g. allows to detect burn-in phases, or fine-tune hyperparameters. First, the parameter trajectories can be visualized:

```
[16]: ax = visualize.sampling_parameter_traces(res, use_problem_bounds=False, size=(12,5))
```

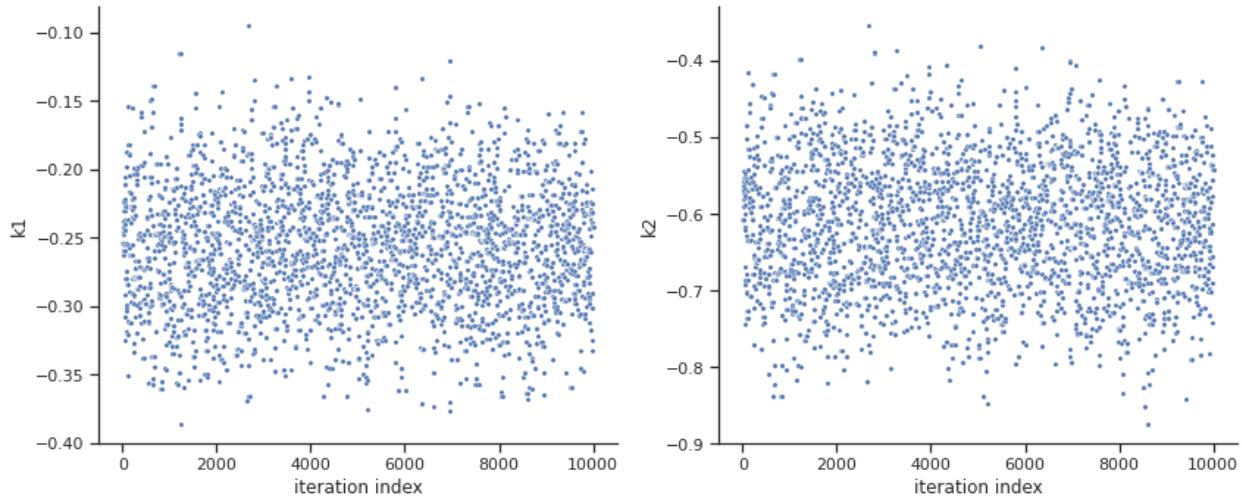

By visual inspection one can see that the chain is already converged from the start. This is already showing the benefit of initiating the chain at the optimal parameter vector. However, this may not be always the case.


```
[17]: sample.geweke_test(result=res)
ax = visualize.sampling_parameter_traces(res, use_problem_bounds=False, size=(12,5))
Geweke burn-in index: 0
```

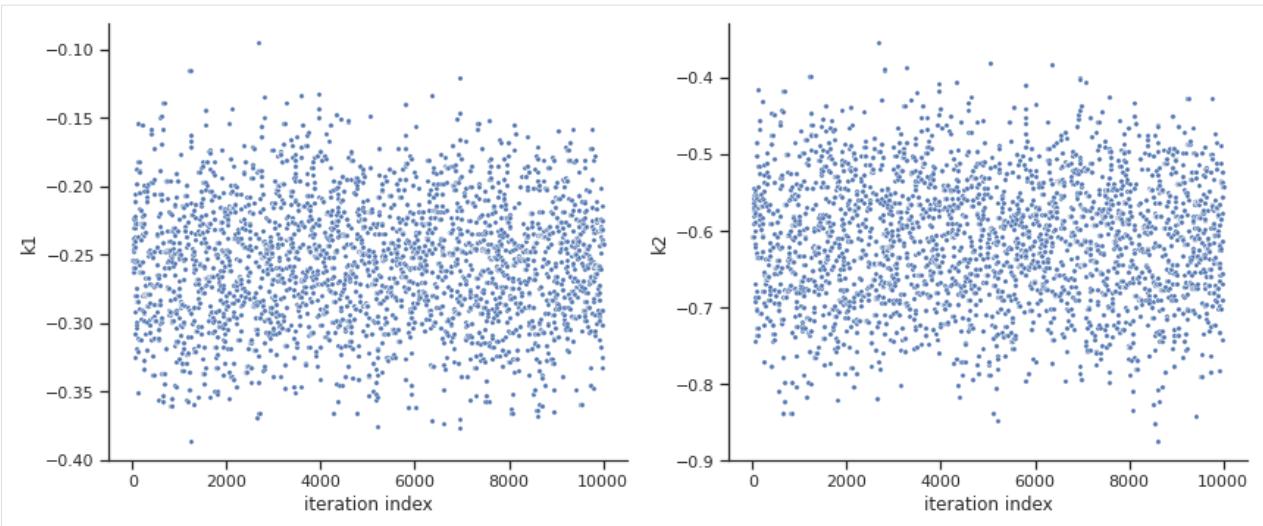

```
[18]: sample.effective_sample_size(result=res)
ess = res.sample_result.effective_sample_size
print(f'Effective sample size per computation time: {round(ess/elapsed_time,2)}')

Estimated chain autocorrelation: 7.213987603646274
Estimated effective sample size: 1217.5572307365612
Effective sample size per computation time: 23.32
```

```
[19]: percentiles = [99, 95, 90]
ax = visualize.sampling_parameter_cis(res, alpha=percentiles, size=(10,5))
```

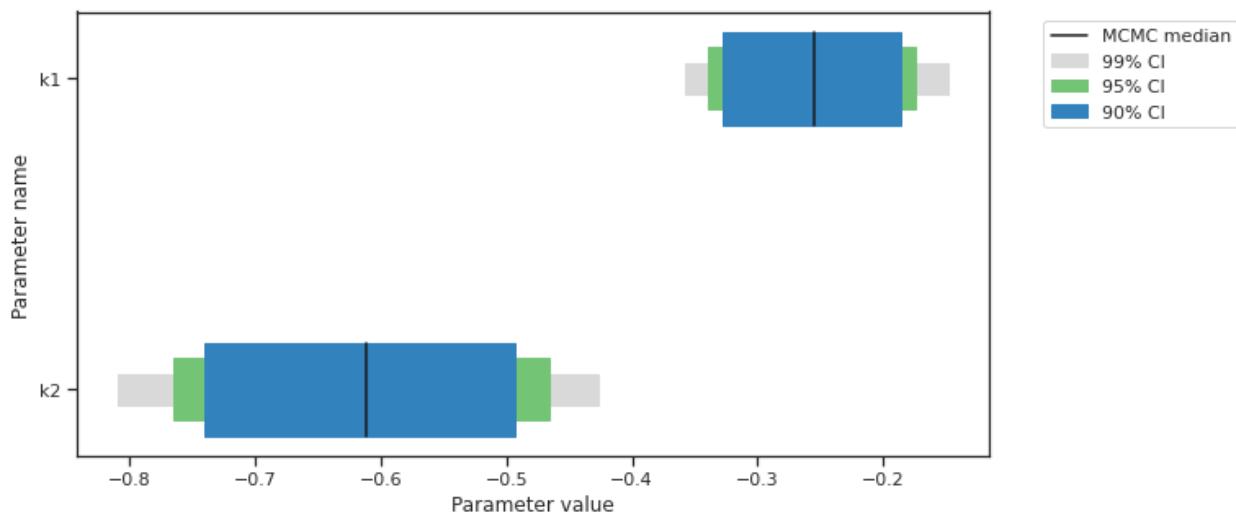


```
[20]: # Create the ensemble with the MCMC chain from parallel tempering with the real
      ↪temperature.
ensemble = Ensemble.from_sample(
    res,
    x_names=x_names,
    ensemble_type=EnsembleType.sample,
    lower_bound=res.problem.lb,
    upper_bound=res.problem.ub
```

(continues on next page)


(continued from previous page)

```
)
ensemble_prediction = ensemble.predict(predictor_y, prediction_id=AMICI_Y, ↴
engine=engine)
100%|| 8/8 [00:00<00:00, 2219.21it/s]
```

```
[21]: ax = visualize.sampling_prediction_trajectories(
    ensemble_prediction,
    levels=credibility_interval_levels,
    size=(10,5),
    labels={'A': 'obs_A', 'condition_0': 'cond_0'},
    axis_label_padding=60,
    groupby=CONDITION,
)
```

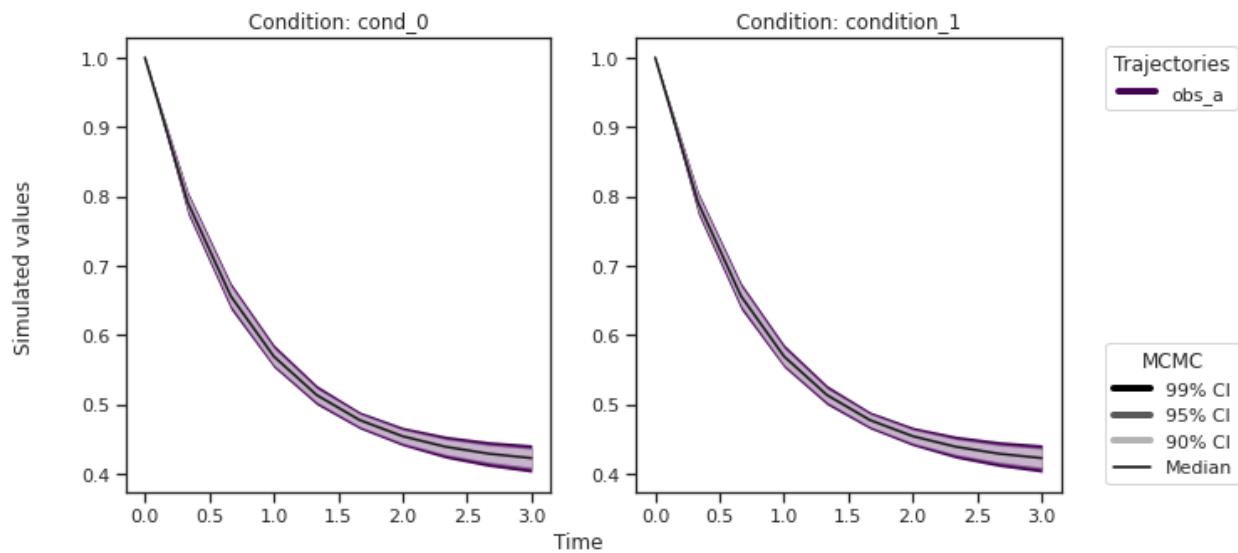

```
[22]: ax = visualize.sampling_prediction_trajectories(
    ensemble_prediction,
    levels=credibility_interval_levels,
    size=(10,5),
    labels={'A': 'obs_A', 'condition_0': 'cond_0'},
    axis_label_padding=60,
    groupby=OUTPUT,
)
```

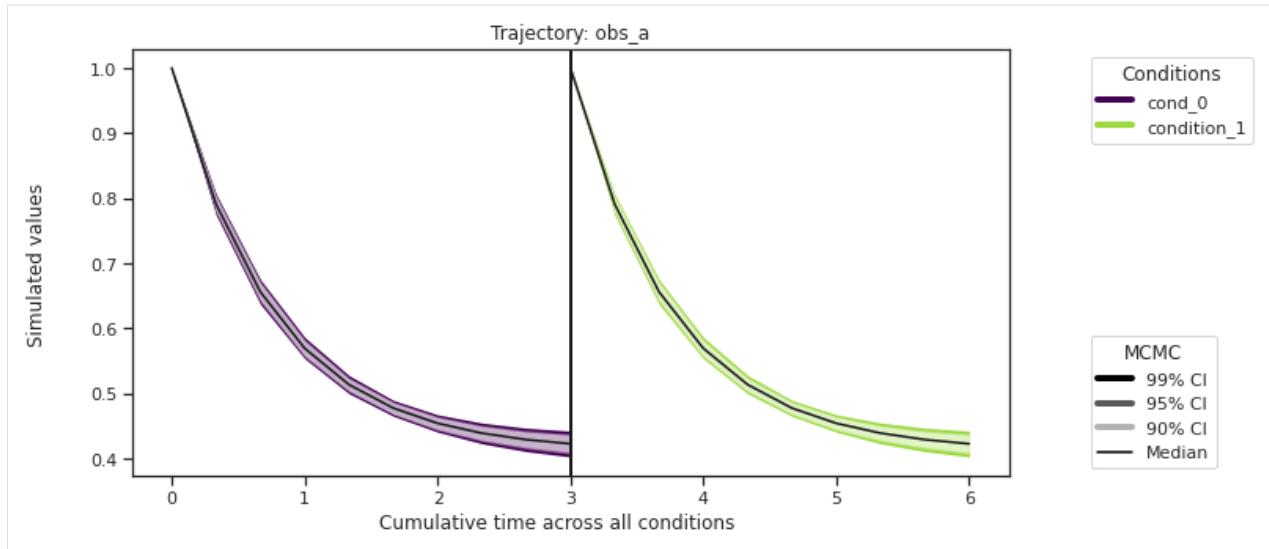


Custom timepoints can also be specified, either for each condition - `amici_objective.set_custom_timepoints(..., timepoints=...)`

or for all conditions - `amici_objective.set_custom_timepoints(..., timepoints_global=...)`.

```
[23]: # Create a custom objective with new output timepoints.
timepoints = [np.linspace(0, 10, 100), np.linspace(0, 20, 200)]
amici_objective_custom = amici_objective.set_custom_timepoints(timepoints=timepoints)

# Create an observable predictor with the custom objective.
predictor_y_custom = AmiciPredictor(
    amici_objective_custom,
    post_processor=post_processor_y,
    output_ids=observable_ids,
)

# Predict then plot.
ensemble_prediction = ensemble.predict(predictor_y_custom, prediction_id=AMICI_Y,
                                         engine=engine)
ax = visualize.sampling_prediction_trajectories(
    ensemble_prediction,
    levels=credibility_interval_levels,
    groupby=CONDITION,
)
100%| | 8/8 [00:00<00:00, 1193.09it/s]
```

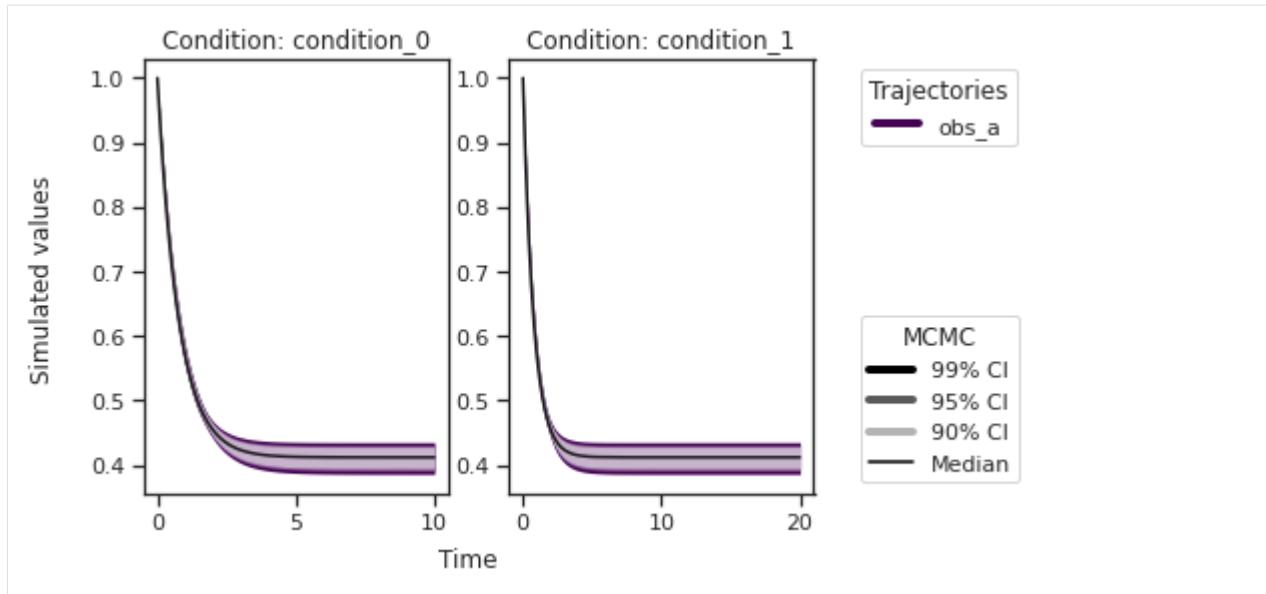

2.9 Optimization with Synthetic Data

In this notebook, optimization is performed with an SBML model and PEtab parameter estimation problem, which includes some measurements.

Next, optimization is performed with synthetic data as measurements, which is generated using PEtab and AMICI. The ability to recover the parameter vector that was used to generate the synthetic data is demonstrated.

2.9.1 Requirements

Additional requirements for this notebook can be installed with `pip install amici petab`.

```
[ ]: # install if not done yet
# !apt install libatlas-base-dev swig
# %pip install pypesto[amici,petab] --quiet
```

1. Load required packages. PEtab provides a base class that is designed to be easily extended to support simulation with different tools. Here, the AMICI implementation of this base class is used.

```
[1]: import amici.petab_simulate
import matplotlib.pyplot as plt
import petab
import pypesto.optimize
import pypesto.petab
import pypesto.visualize

# Helper function to get the maximum likelihood estimate as a dictionary from a
# pyPESTO optimization result.
def get_x_mle(optimize_result, pypesto_problem, petab_problem, scaled=True):
    if not scaled:
        scaling = petab.parameters.get_optimization_parameter_scaling(petab_problem.
            parameter_df)
    return {
```

(continues on next page)

(continued from previous page)

```

    x_id: (petab.parameters.unscale(x_value, scaling[x_id]) if not scaled else x_
    ↵value)
        for x_id, x_value in zip(pypesto_problem.x_names, optimize_result.list[0]['x
    ↵'])
            #if x_id in scaling
    }
}

```

2.10 Standard Optimization

The PEtab problem is used to generate a pyPESTO problem, which is used to estimate model parameters.

- Load a PEtab problem. The synthetic data returned by the PEtab-derived synthetic data generator (later, an instance of `amici.petab_simulate.PetabSimulator`) will be equivalent to switching the measurements in the PEtab problem's measurements table with simulated values.

```
[2]: petab_yaml_filename = 'conversion_reaction/conversion_reaction.yaml'
petab_problem_original = petab.Problem.from_yaml(petab_yaml_filename)
```

- Create a pyPESTO problem from the PEtab problem. Here, the original PEtab problem is used for parameter estimation (no synthetic data is generated).

```
[3]: pypesto_importer_original = pypesto.petab.PetabImporter(petab_problem_original)
pypesto_problem_original = pypesto_importer_original.create_problem()
```

- Estimate parameters. Multi-start local optimization with 100 starts is used, with the default pyPESTO optimizer.

```
[4]: pypesto_result_original = pypesto.optimize.minimize(pypesto_problem_original, n_
    ↵starts=100)
```


Parameters obtained from history and optimizer do not match: [-0.25418068 -0.
↪60837086], [-0.25416788 -0.60834112]

- Visualize parameter estimation. Here, estimated values for `k1` and `k2` are shown, then a waterfall plot to indicate optimization quality, then a plot of the estimated parameters from the different starts to indicate identifiability.

Here, parameter estimation appears to have been successful. In the case of problematic parameter estimation, synthetic data can be used to determine whether parameter estimation can be used to identify known parameter values.

```
[5]: x_mle_unscaled_original = get_x_mle(pypesto_result_original.optimize_result,
                                         pypesto_problem_original,
                                         petab_problem_original,
                                         scaled=False)
print('Parameters are estimated to be (linear scale):')
print('\n'.join([f'{x_id}: {x_value}' for x_id, x_value in x_mle_unscaled_original.
    ↵items()]))
pypesto.visualize.waterfall(pypesto_result_original);
pypesto.visualize.parameters(pypesto_result_original);

Parameters are estimated to be (linear scale):
k1: 0.7755615818811391
k2: 0.5442529577589637
```

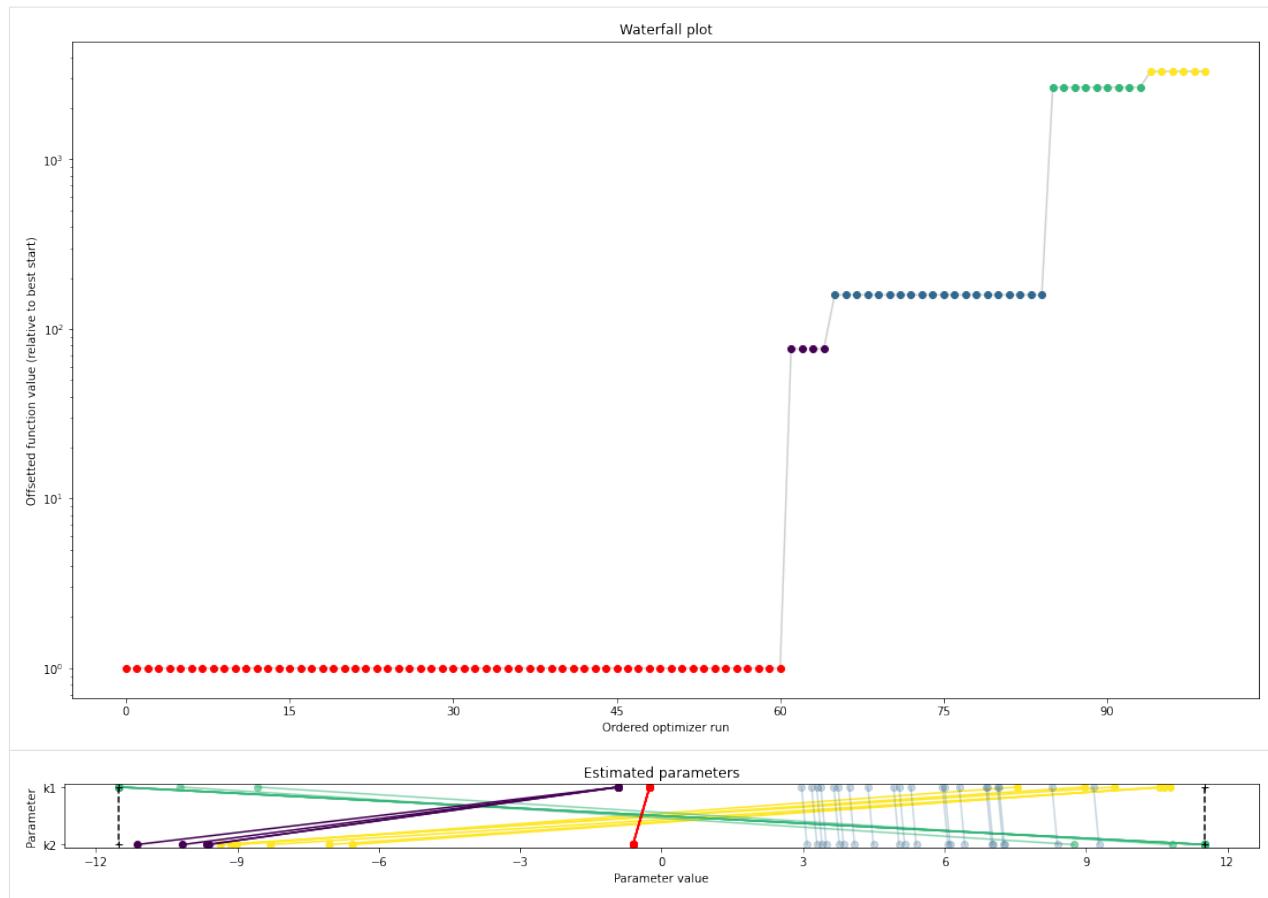

2.11 Synthetic Optimization

Similar to the standard optimization, except the PEtab measurements table is replaced with synthetic data that is generated from specified parameters, with noise, and then used for optimization.

Here, parameters are specified with a dictionary that is used to update the original PEtab parameters table. An alternative is use a second PEtab YAML file that is identical to the original, except for the parameters table, which would now contain the parameter values to be used for synthetic data generation.

2.11.1 Noise

Noise is added to the simulated data according to the: - noise distribution in the PEtab observables table; - noise formula in the PEtab observables table, which is used to calculate the scale of the noise distribution; and - noise parameters in the PEtab measurements table, which are substituted into the noise formula for measurement-specific noise distribution scales.

6. As before, load a PEtab problem. This time, the parameters table is edited to contain parameters values that will be used for synthetic data generation (`synthetic_parameters`). Then, the simulator is used to generate synthetic data, which replaces the measurements table of the PEtab problem for parameter estimation in the next step.

Here, synthetic data also has noise added (`noise=True`), which is defined by the PEtab problem as described above. A noise scaling factor can also be specified (here, a small value - `noise_scaling_factor=0.01` - is used, to reduce noise such that the synthetic parameters are more likely to be recovered with parameter estimation).

The simulator working directory is then deleted along with its contents.

```
[6]: petab_problem_synthetic = petab.Problem.from_yaml(petab_yaml_filename)

synthetic_parameters = {'k1': 1.5, 'k2': 2.5}
petab_problem_synthetic.parameter_df[petab.C.NOMINAL_VALUE].update(synthetic_
    ↪parameters)

simulator = amici.petab_simulate.PetabSimulator(petab_problem_synthetic)
# Optional: the AMICI simulator is provided a model, to avoid recompilation
petab_problem_synthetic.measurement_df = simulator.simulate(
    noise=True,
    noise_scaling_factor=0.01,
    amici_model=pypesto_problem_original.objective.amici_model,
)
simulator.remove_working_dir()
```

7. Create a pyPESTO problem from the edited PEtab problem, and estimate parameters.

```
[7]: pypesto_importer_synthetic = pypesto.petab.PetabImporter(petab_problem_synthetic)
pypesto_problem_synthetic = pypesto_importer_synthetic.create_problem()
pypesto_result_synthetic = pypesto.optimize.minimize(pypesto_problem_synthetic, n_
    ↪starts=100)


Function values from history and optimizer do not match: -24.31965832797165, 1439.
    ↪3853896684805
Parameters obtained from history and optimizer do not match: [0.10235171 0.50828654], ↪
    ↪[-10.9022877 11.51292546]
```

8. Visualize parameter estimation. Here, the estimates for k1 and k2 are similar to the synthetic parameters, suggesting that parameter estimation works well with this PEtab problem and can be used to identify parameter values successfully (**caveat**: noise is reduced here; parameter estimation can be expected to perform worse with more realistically noisy data).

```
[8]: x_mle_unscaled_synthetic = get_x_mle(pypesto_result_synthetic.optimize_result,
                                         pypesto_problem_synthetic,
                                         petab_problem_synthetic,
                                         scaled=False)
print('Parameters are estimated to be (linear scale):')
print('\n'.join([f'{x_id}: {x_value}' for x_id, x_value in x_mle_unscaled_synthetic.
    ↪items()])))

pypesto.visualize.waterfall(pypesto_result_synthetic);
pypesto.visualize.parameters(pypesto_result_synthetic);

Parameters are estimated to be (linear scale):
k1: 1.4969201262521281
k2: 2.494299196042553
```

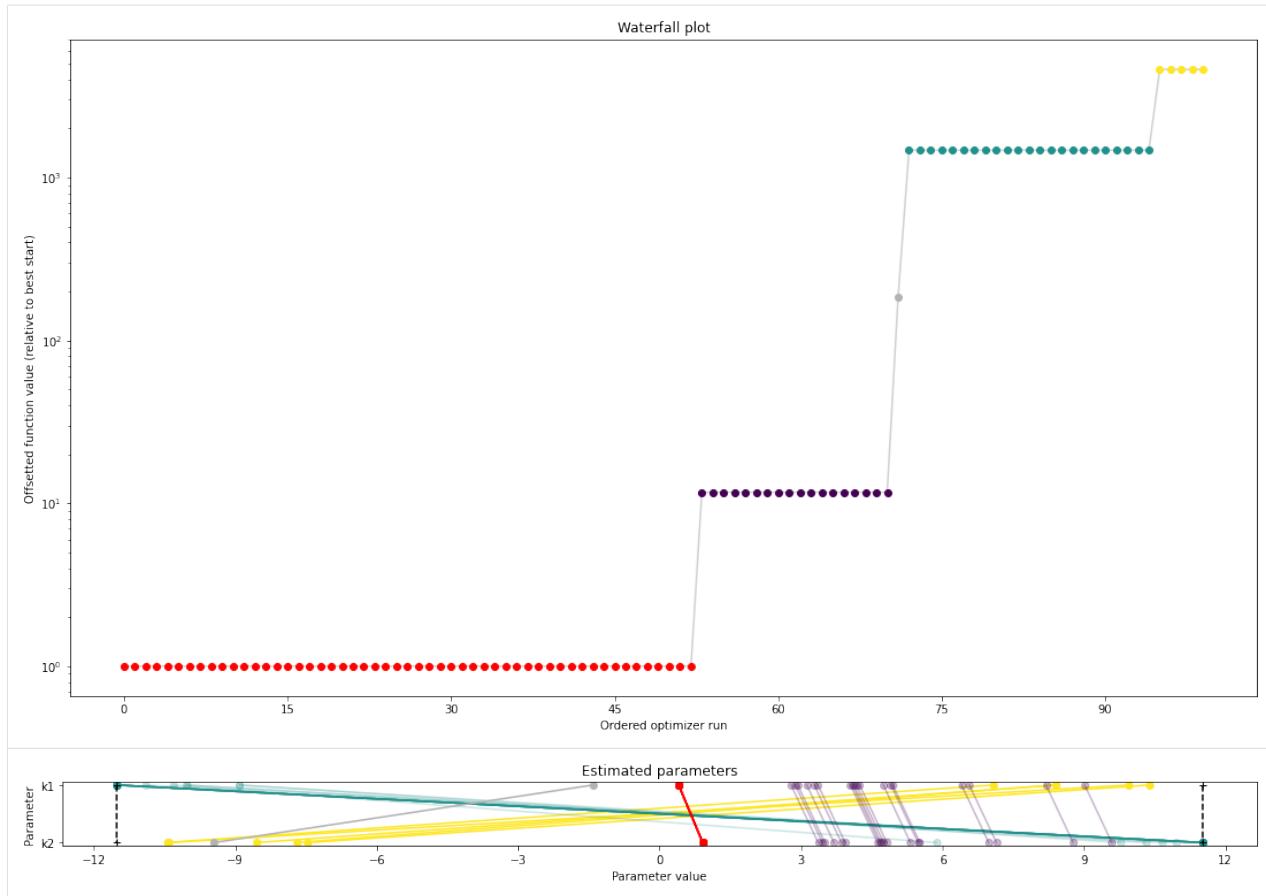

2.12 Definition of Priors:

In this notebook we demonstrate how to include prior knowledge into a parameter inference problem, in particular how to define (log-)priors for parameters. If you want to maximize your posterior distribution, you need to define

- A (negative log-)likelihood
- A (log-)prior

The posterior is then built as an `AggregatedObjective`. If you import a problem via `PEtab` and the priors are contained in the parameter table, the definition of priors is done automatically.

CAUTION: The user needs to specify the **negative log-likelihood**, while the *log-prior* is internally multiplied by -1.

```
[ ]: # install if not done yet
# %pip install pypesto --quiet
```

```
[1]: import numpy as np
import scipy as sp

import pypesto
```

2.12.1 Example: Rosenbrock Banana

We will use the Rosenbrock Banana

$$f(x, \theta) = \sum_{i=1}^N \underbrace{100 \cdot (x_i - x_{i-1}^2)^2}_{\text{"negative log-likelihood"}} + \underbrace{(x_{i-1} - 1)^2}_{\text{"Gaussian log-prior"}} \quad (2.1)$$

as an example. Here we interpret the first term as the *negative log-likelihood* and the second term as Gaussian *log-prior* with mean 1 and standard deviation $1/\sqrt{2}$.

Note that the second term is only equivalent to the negative log-distribution of a Gaussian up to a constant.

Define the negative log-likelihood

```
[2]: n_x = 5

def rosenbrock_part_1(x):
    """
    Calculate obj. fct + gradient of the "likelihood" part.
    """
    obj = sum(100.0*(x[1:] - x[:-1]**2.0)**2.0)

    grad = np.zeros_like(x)
    grad[:-1] += -400 * (x[1:] - x[:-1]**2.0) * x[:-1]
    grad[1:] += 200 * (x[1:] - x[:-1]**2.0)

    return (obj, grad)

neg_log_likelihood = pypesto.Objective(fun=rosenbrock_part_1, grad=True)
```

Define the log-prior

A prior on an individual parameter is defined in a `prior_dict`, which contains the following key-value pairs:

- `index`: Index of the parameter
- `density_fun`: (Log-)posterior. (Scalar function!)
- `density_dx`: d/dx (Log-)posterior (optional)
- `density_ddx`: d^2/dx^2 (Log-)posterior (optional)

`prior_dict` can be either obtained by `get_parameter_prior_dict` for several common priors, or defined by the user.

```
[3]: from pypesto.objective.priors import get_parameter_prior_dict

# create a list of prior dicts...
prior_list = []
mean = 1
std_dev = 1 / np.sqrt(2)

for i in range(n_x-1):
    prior_list.append(get_parameter_prior_dict(i, 'normal', [mean, std_dev]))
```

(continues on next page)

(continued from previous page)

```
# create the prior
neg_log_prior = pypesto.objective.NegLogParameterPriors(prior_list)
```

Define the negative log-posterior and the problem

The negative log-posterior is defined as an AggregatedObjective. Since optimization/visualization is not the main focus of this notebook, the reader is referred to other examples for a more in-depth presentation of these.

```
[4]: neg_log_posterior = pypesto.objective.AggregatedObjective([neg_log_likelihood, neg_
    ↪log_prior])

lb = -5 * np.ones((n_x, 1))
ub = 5 * np.ones((n_x, 1))

problem = pypesto.Problem(objective=neg_log_posterior,
                           lb=lb,
                           ub=ub)
```

Optimize

```
[5]: import pypesto.optimize as optimize

result = optimize.minimize(problem, n_starts=10)
```


Some basic visualizations

```
[6]: import pypesto.visualize as visualize

visualize.waterfall(result, size=(15, 6))

# parallel coordinates plot for best 5 fits
visualize.parameters(result, start_indices=5)

[6]: <matplotlib.axes._subplots.AxesSubplot at 0x12faa1908>
```

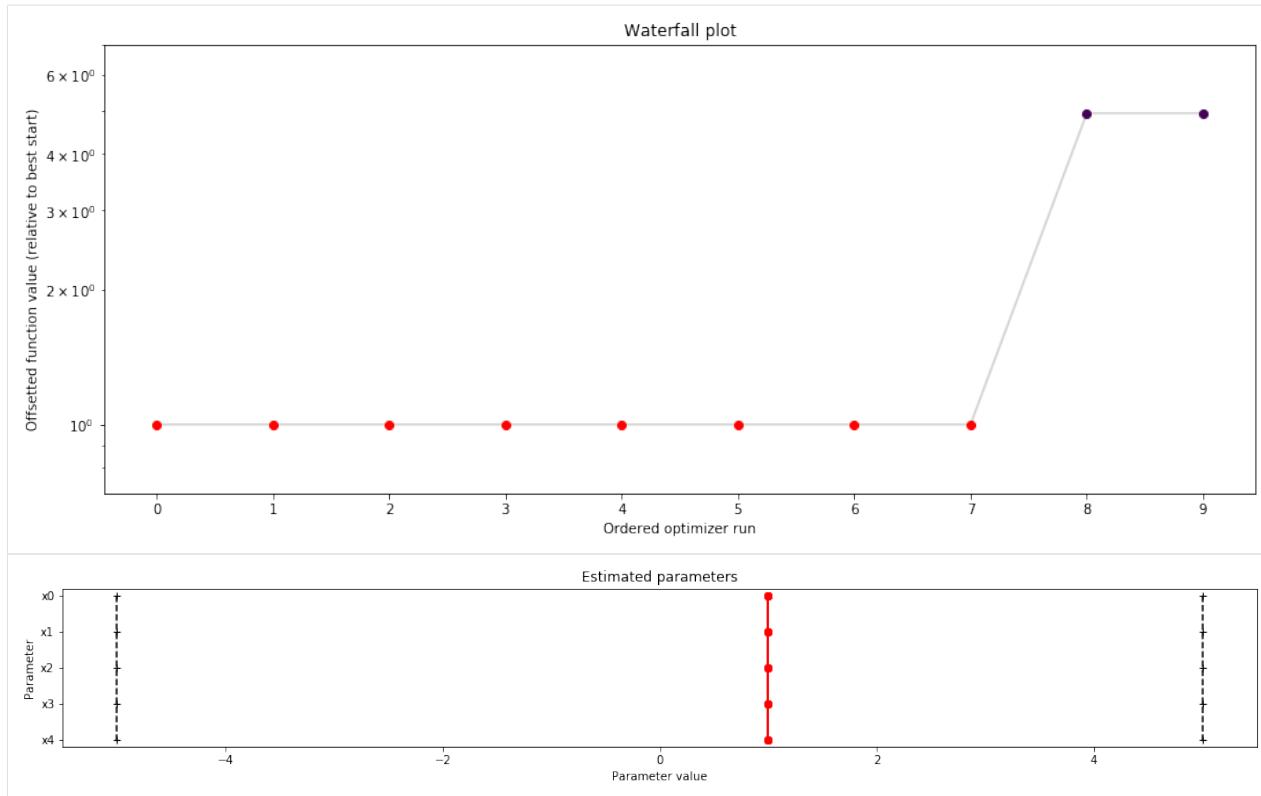

[]:

2.13 Save and load results as HDF5 files

```
[ ]: # install if not done yet
# %pip install pypesto --quiet
```

```
[24]: import pypesto
import numpy as np
import scipy as sp
import pypesto.optimize as optimize
import matplotlib.pyplot as plt
import pypesto.store as store
import pypesto.profile as profile
import pypesto.sample as sample
import tempfile

%matplotlib inline
```

In this notebook, we will demonstrate how to save and (re-)load optimization results, profile results and sampling results to an .hdf5 file. The use case of this notebook is to generate visualizations from reloaded result objects.

2.13.1 Define the objective and problem

```
[25]: objective = pypesto.Objective(fun=sp.optimize.rosen,
                                    grad=sp.optimize.rosen_der,
                                    hess=sp.optimize.rosen_hess)

dim_full = 20
lb = -5 * np.ones((dim_full, 1))
ub = 5 * np.ones((dim_full, 1))

problem = pypesto.Problem(objective=objective, lb=lb, ub=ub)
```

2.13.2 Fill result object with profile, sample, optimization

```
[26]: # create optimizers
optimizer = optimize.ScipyOptimizer()

# set number of starts
n_starts = 10

# Optimization
result = pypesto.optimize.minimize(
    problem=problem, optimizer=optimizer,
    n_starts=n_starts)
# Profiling
result = profile.parameter_profile(
    problem=problem, result=result,
    optimizer=optimizer)
# Sampling
sampler = sample.AdaptiveMetropolisSampler()
result = sample.sample(problem=problem,
                      sampler=sampler,
                      n_samples=100000,
                      result=result)

100% | 100000/100000 [00:29<00:00, 3431.32it/s]
```


2.13.3 Plot results

We now want to plot the results (before saving).

```
[27]: import pypesto.visualize


# plot waterfalls
pypesto.visualize.waterfall(result, size=(15, 6))

[27]: <AxesSubplot:title={'center':'Waterfall plot'}, xlabel='Ordered optimizer run', ylabel='Offsetted function value (relative to best start)'>
```

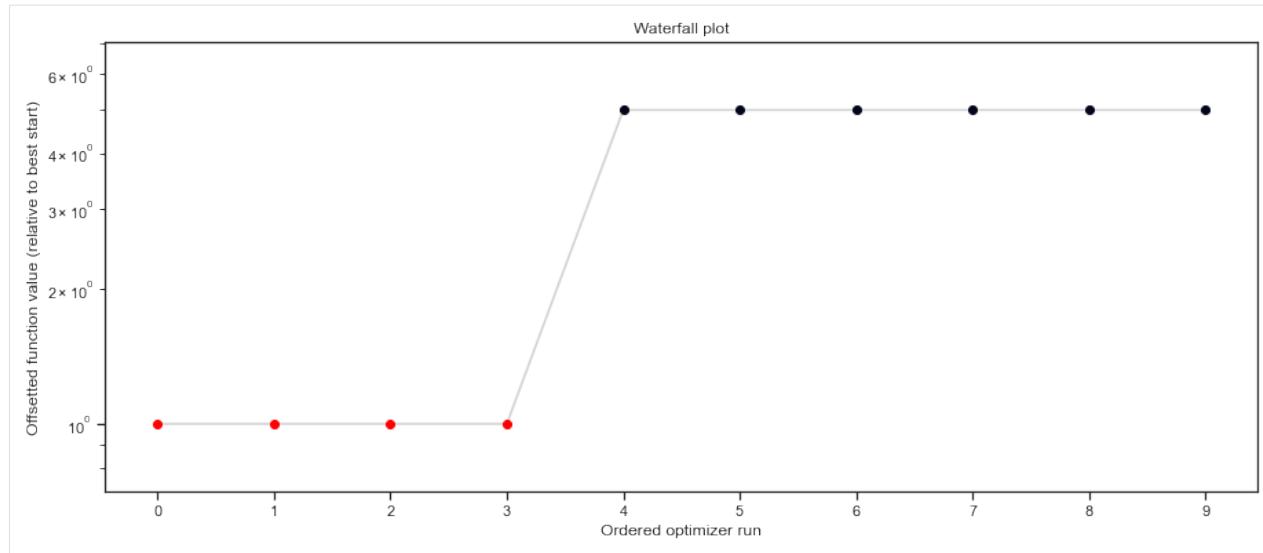


```
[28]: # plot profiles
pypesto.visualize.profiles(result)
```

```
[28]: [<AxesSubplot:xlabel='x0', ylabel='Log-posterior ratio'>,
<AxesSubplot:xlabel='x1'>,
<AxesSubplot:xlabel='x2'>,
<AxesSubplot:xlabel='x3'>,
<AxesSubplot:xlabel='x4'>,
<AxesSubplot:xlabel='x5', ylabel='Log-posterior ratio'>,
<AxesSubplot:xlabel='x6'>,
<AxesSubplot:xlabel='x7'>,
<AxesSubplot:xlabel='x8'>,
<AxesSubplot:xlabel='x9'>,
<AxesSubplot:xlabel='x10', ylabel='Log-posterior ratio'>,
<AxesSubplot:xlabel='x11'>,
<AxesSubplot:xlabel='x12'>,
<AxesSubplot:xlabel='x13'>,
<AxesSubplot:xlabel='x14'>,
<AxesSubplot:xlabel='x15', ylabel='Log-posterior ratio'>,
<AxesSubplot:xlabel='x16'>,
<AxesSubplot:xlabel='x17'>,
<AxesSubplot:xlabel='x18'>,
<AxesSubplot:xlabel='x19'>]
```

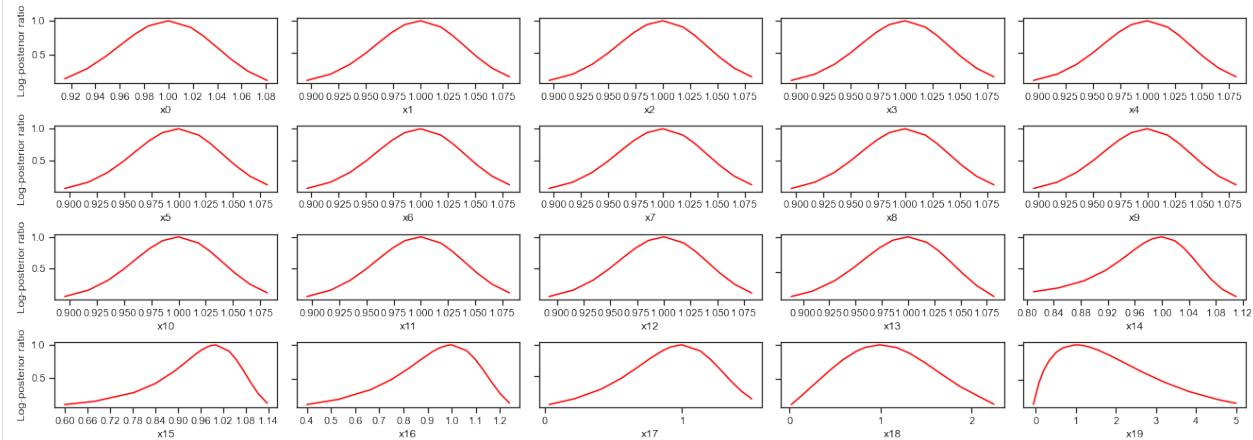

```
[29]: # plot samples
pypesto.visualize.sampling_fval_traces(result)

[29]: <AxesSubplot:xlabel='iteration index', ylabel='log-posterior'>
```

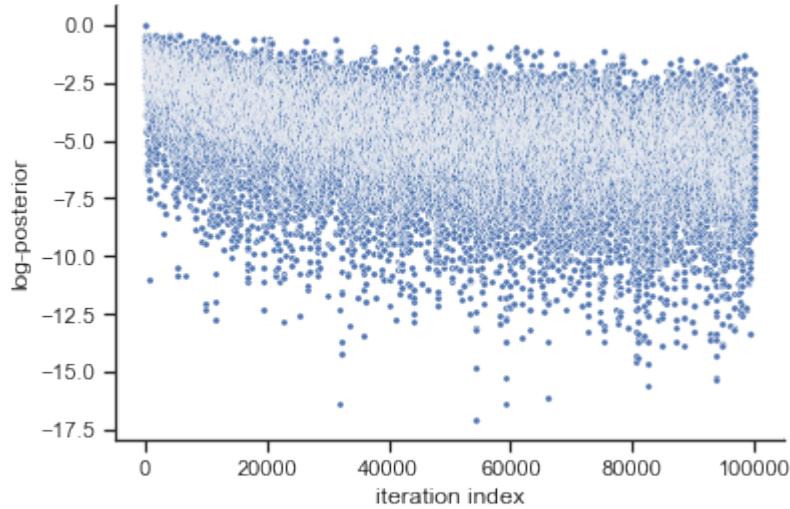

2.13.4 Save result object in HDF5 File

```
[30]: # create temporary file
fn = tempfile.mktemp(".hdf5")

# write result with write_result function.
# Choose which parts of the result object to save with
# corresponding booleans.
store.write_result(result=result,
                   filename=fn,
                   problem=True,
                   optimize=True,
                   profile=True,
                   sample=True)
```


2.13.5 Reload results

```
[31]: # Read result
result2 = store.read_result(fn)
```

2.13.6 Plot (reloaded) results


```
[32]: # plot waterfalls
pypesto.visualize.waterfall(result2, size=(15, 6))

[32]: <AxesSubplot:title={'center':'Waterfall plot'}, xlabel='Ordered optimizer run',  
      ylabel='Offsetted function value (relative to best start)'>
```

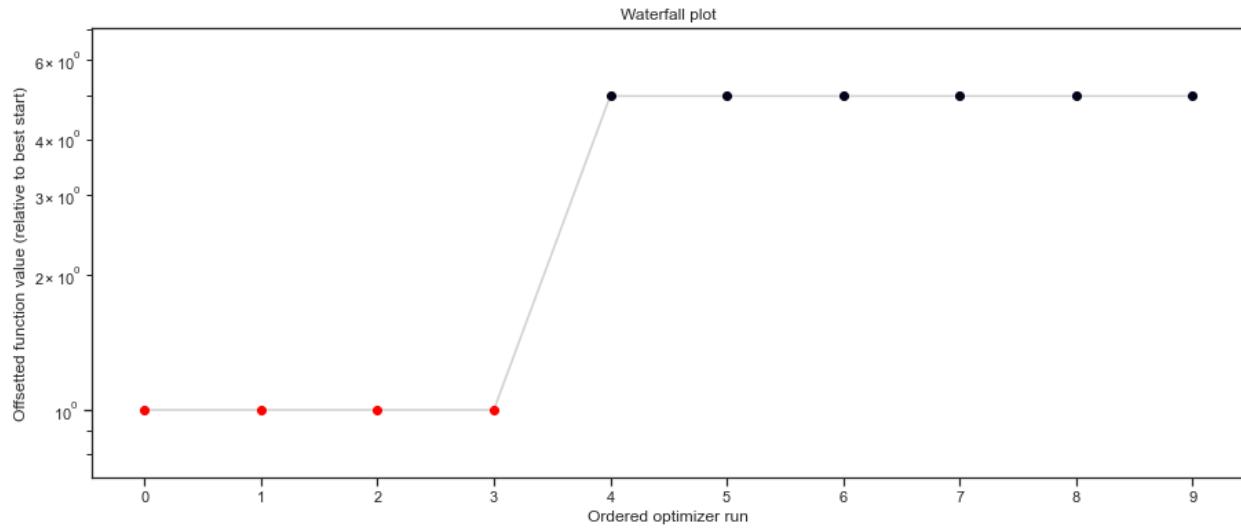


```
[33]: # plot profiles
pypesto.visualize.profiles(result2)

[33]: [<AxesSubplot:xlabel='x0', ylabel='Log-posterior ratio',  
        <AxesSubplot:xlabel='x1',  
        <AxesSubplot:xlabel='x2',  
        <AxesSubplot:xlabel='x3',  
        <AxesSubplot:xlabel='x4',  
        <AxesSubplot:xlabel='x5', ylabel='Log-posterior ratio',  
        <AxesSubplot:xlabel='x6',  
        <AxesSubplot:xlabel='x7',  
        <AxesSubplot:xlabel='x8',  
        <AxesSubplot:xlabel='x9',  
        <AxesSubplot:xlabel='x10', ylabel='Log-posterior ratio',  
        <AxesSubplot:xlabel='x11',  
        <AxesSubplot:xlabel='x12',  
        <AxesSubplot:xlabel='x13',  
        <AxesSubplot:xlabel='x14',  
        <AxesSubplot:xlabel='x15', ylabel='Log-posterior ratio',  
        <AxesSubplot:xlabel='x16',  
        <AxesSubplot:xlabel='x17',  
        <AxesSubplot:xlabel='x18',  
        <AxesSubplot:xlabel='x19'>]
```

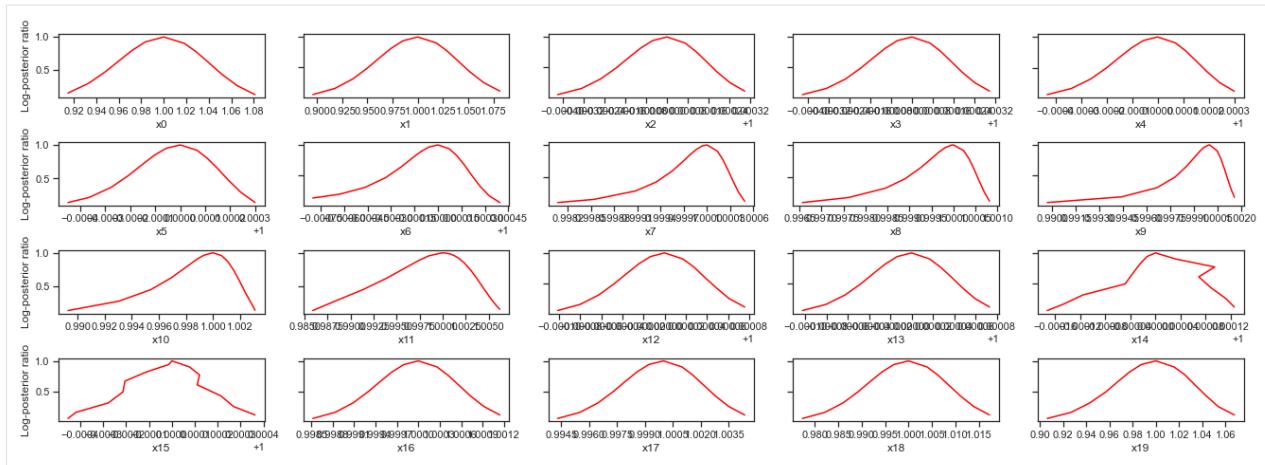

```
[34]: # plot samples
pypesto.visualize.sampling_fval_traces(result2)
```

```
[34]: <AxesSubplot:xlabel='iteration index', ylabel='log-posterior'>
```

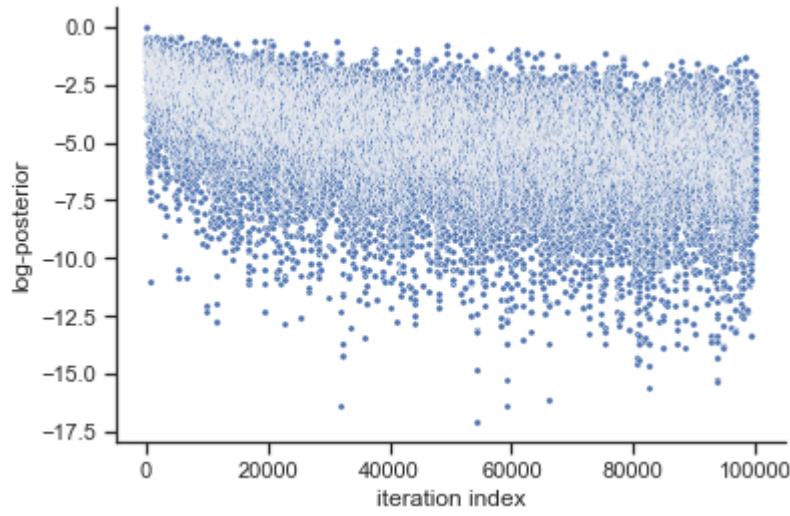

For the saving of optimization history, we refer to [store.ipynb](#).

2.14 Download the examples as notebooks

- Rosenbrock
- Conversion reaction
- Fixed parameters
- Boehm model
- Petab import
- Storage
- Sampler study
- Sampling diagnostics

- Synthetic data
- Prior definition
- hdf5 storage

Note: Some of the notebooks have extra dependencies.

STORAGE

It is important to be able to store analysis results efficiently, easily accessible, and portable across systems. For this aim, pyPESTO allows to store results in efficient, portable **HDF5** files. Further, optimization trajectories can be stored using various backends, including HDF5 and CSV.

In the following, describe the file formats. For detailed information on usage, consult the `doc/example/hdf5_storage.ipynb` and `doc/example/store.ipynb` notebook, and the API documentation for the `pypesto.objective.history` and `pypesto.storage` modules.

3.1 pyPESTO Problem

```
+ /problem/
- Attributes:
  - filled by objective.get_config()
  - ...

- lb [float n_par]
- ub [float n_par]
- lb_full [float n_par_full]
- ub_full [float n_par_full]
- dim [int]
- dim_full [int]
- x_fixed_values [float (n_par_full-n_par)]
- x_fixed_indices [int (n_par_full-n_par)]
- x_free_indices [int n_par]
- x_names [str n_par_full]
```

3.2 Parameter estimation

3.2.1 Parameter estimation settings

Parameter estimation settings are saved in `/optimization/settings`.

3.2.2 Parameter estimation results

Parameter estimation results are saved in `/optimization/results/`.

Results per local optimization

Results of the n 'th multistart are saved in the format

```
+ /optimization/results/$n/
- fval: [float]
    Objective function value of best iteration
- x: [float n_par_full]
    Parameter set of best iteration
- grad: [float n_par_full]
    Gradient of objective function at point x
- hess: [float n_par_full x n_par_full]
    Hessian matrix of objective function at point x
- n_fval: [int]
    Total number of objective function evaluations
- n_grad: [int]
    Number of gradient evaluations
- n_hess: [int]
    Number of Hessian evaluations
- x0: [float n_par_full]
    Initial parameter set
- fval0: [float]
    Objective function value at starting parameters
- exitflag: [str] Some exit flag
- time: [float] Execution time
- message: [str] Some exit message
```

Trace per local optimization

When objective function call histories are saved to HDF5, they are under `/optimization/results/$n/trace/`.

```
+ /optimization/results/$n/trace/
- fval: [float n_iter]
    Objective function value of best iteration
- x: [float n_iter x n_par_full]
    Parameter set of best iteration
- grad: [float n_iter x n_par_full]
    Gradient of objective function at point x
- hess: [float n_iter x n_par_full x n_par_full]
    Hessian matrix of objective function at point x
- time: [float n_iter] Executition time
- chi2: [float n_iter x ...]
- schi2: [float n_iter x ...]
```

3.3 Sampling

3.3.1 Sampling results

Sampling results are saved in `/sampling/results/`.

```
+ /sampling/results/
- betas [float n_chains]
- trace_neglogpost [float n_chains x (n_samples+1)]
- trace_neglogprior [float n_chains x (n_samples+1)]
- trace_x [float n_chains x (n_samples+1) x n_par]
- Attributes:
- time
```

3.4 Profiling

3.4.1 Profiling results

Profiling results are saved in `/profiling/$profiling_id/`, where `profiling_id` indicates the number of profilings done.

```
+/profiling/profiling_id/
- $parameter_index/
- exitflag_path [float n_iter]
- fval_path [float n_iter]
- gradnorm_path [float n_iter]
- ratio_path [float n_iter]
- time_path [float n_iter]
- x_path [float n_par x n_iter]
- Attributes:
- time_total
- IsNone
- n_fval
- n_grad
- n_hess
```


API REFERENCE

4.1 pyPESTO

Parameter Estimation TOOlbox for python.

```
class pypesto.AmiciObjective(amici_model: Union[amici.Model, amici.ModelPtr],  
                           amici_solver: Union[amici.Solver, amici.SolverPtr],  
                           edatas: Union[Sequence[amici.ExpData], amici.ExpData],  
                           max_sensi_order: Optional[int] = None, x_ids: Optional[Sequence[str]]  
                           = None, parameter_mapping: Optional[ParameterMapping]  
                           = None, guess_steadystate: Optional[bool] = None,  
                           n_threads: Optional[int] = 1, fim_for_hess: Optional[bool]  
                           = True, amici_object_builder: Optional[pypesto.objective.amici.AmiciObjectBuilder]  
                           = None, calculator: Optional[pypesto.objective.amici_calculator.AmiciCalculator]  
                           = None)
```

Bases: pypesto.objective.base.ObjectiveBase

Allows to create an objective directly from an amici model.

```
__init__(amici_model: Union[amici.Model, amici.ModelPtr], amici_solver: Union[amici.Solver,  
                           amici.SolverPtr], edatas: Union[Sequence[amici.ExpData], amici.ExpData],  
                           max_sensi_order: Optional[int] = None, x_ids: Optional[Sequence[str]] =  
                           None, x_names: Optional[Sequence[str]] = None, parameter_mapping:  
                           Optional[ParameterMapping] = None, guess_steadystate:  
                           Optional[bool] = None, n_threads: Optional[int] = 1, fim_for_hess:  
                           Optional[bool] = True, amici_object_builder:  
                           Optional[pypesto.objective.amici.AmiciObjectBuilder] = None, calculator:  
                           Optional[pypesto.objective.amici_calculator.AmiciCalculator] = None)
```

Initialize objective.

Parameters

- **amici_model** – The amici model.
- **amici_solver** – The solver to use for the numeric integration of the model.
- **edatas** – The experimental data. If a list is passed, its entries correspond to multiple experimental conditions.
- **max_sensi_order** – Maximum sensitivity order supported by the model. Defaults to 2 if the model was compiled with o2mode, otherwise 1.
- **x_ids** – Ids of optimization parameters. In the simplest case, this will be the AMICI model parameters (default).

- **x_names** – Names of optimization parameters.
- **parameter_mapping** – Mapping of optimization parameters to model parameters. Format as created by `amici.petab_objective.create_parameter_mapping`. The default is just to assume that optimization and simulation parameters coincide.
- **guess_steadystate** – Whether to guess steadystates based on previous steadystates and respective derivatives. This option may lead to unexpected results for models with conservation laws and should accordingly be deactivated for those models.
- **n_threads** – Number of threads that are used for parallelization over experimental conditions. If amici was not installed with openMP support this option will have no effect.
- **fim_for_hess** – Whether to use the FIM whenever the Hessian is requested. This only applies with forward sensitivities. With adjoint sensitivities, the true Hessian will be used, if available. FIM or Hessian will only be exposed if `max_sensi_order > 1`.
- **amici_object_builder** – AMICI object builder. Allows recreating the objective for pickling, required in some parallelization schemes.
- **calculator** – Performs the actual calculation of the function values and derivatives.

apply_custom_timepoints() → `None`

Apply custom timepoints, if applicable.

See the `set_custom_timepoints` method for more information.

apply_steadystate_guess (`condition_ix: int`, `x_dct: Dict`) → `None`

Apply steady state guess to `edatas[condition_ix].x0`.

Use the stored steadystate as well as the respective sensitivity (if available) and parameter value to approximate the steadystate at the current parameters using a zeroth or first order taylor approximation: $x_{ss}(x) = x_{ss}(x) + dx_{ss}/dx(x)*(x' - x)$

call_unprocessed (`x: numpy.ndarray`, `sensi_orders: Tuple[int, ...]`, `mode: str`, `edatas: Sequence[amici.ExpData] = None`, `parameter_mapping: ParameterMapping = None`)

Call objective function without pre- or post-processing and formatting.

Returns A dict containing the results.

Return type result

check_gradients_match_finite_differences (`x: Optional[numumpy.ndarray] = None`, `*args`, `**kwargs`) → `bool`

Check if gradients match finite differences (FDs).

Parameters `x` (The parameters for which to evaluate the gradient.) –

Returns Indicates whether gradients match (True) FDs or not (False)

Return type bool

check_mode (`mode: str`) → `bool`

See `ObjectiveBase` documentation.

check_sensi_orders (`sensi_orders: Tuple[int, ...]`, `mode: str`) → `bool`

See `ObjectiveBase` documentation.

get_config() → `dict`

Return basic information of the objective configuration.

initialize()

See `ObjectiveBase` documentation.

par_arr_to_dct (*x*: Sequence[float]) → Dict[str, float]
Create dict from parameter vector.

reset_steadystate_guesses () → None
Reset all steadystate guess data.

set_custom_timepoints (*timepoints*: Optional[Sequence[Sequence[Union[float, int]]]] = None,
timepoints_global: Optional[Sequence[Union[float, int]]] = None) →
pypesto.objective.amici.AmiciObjective
Create a copy of this objective that is evaluated at custom timepoints.
The intended use is to aid in predictions at unmeasured timepoints.

Parameters

- **timepoints** – The outer sequence should contain a sequence of timepoints for each experimental condition.
- **timepoints_global** – A sequence of timepoints that will be used for all experimental conditions.

Returns**Return type** The customized copy of this objective.**store_steadystate_guess** (*condition_ix*: int, *x_dct*: Dict, *rdata*: amici.ReturnData) → None

Store condition parameter, steadystate and steadystate sensitivity.

Stored in steadystate_guesses if steadystate guesses are enabled for this condition.

class pypesto.CsvHistory (*file*: str, *x_names*: Optional[Sequence[str]] = None, *options*: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None, *load_from_file*: bool = False)

Bases: pypesto.objective.history.History

Stores a representation of the history in a CSV file.

Parameters

- **file** – CSV file name.
- **x_names** – Parameter names.
- **options** – History options.
- **load_from_file** – If True, history will be initialized from data in the specified file

__init__ (*file*: str, *x_names*: Optional[Sequence[str]] = None, *options*: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None, *load_from_file*: bool = False)

Initialize self. See help(type(self)) for accurate signature.

finalize ()

Finalize history. Called after a run.

get_chi2_trace (*ix*: Optional[Union[Sequence[int], int]] = None, *trim*: bool = False) → Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_fval_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_grad_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_hess_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_res_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_schi2_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_sres_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_time_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_x_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]
```

Return parameters.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

update (*x*: `numpy.ndarray`, *sensi_orders*: `Tuple[int, ...]`, *mode*: `str`, *result*: `Dict[str, Union[float, numpy.ndarray]]`) → `None`
See History docstring.

```
class pypesto.FD (obj: pypesto.objective.base.ObjectiveBase, grad: Optional[bool] = None, hess: Optional[bool] = None, sres: Optional[bool] = None, hess_via_fval: bool = True, delta_fun: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_grad: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_res: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, method: str = 'central', x_names: Optional[List[str]] = None)
```

Bases: `pypesto.objective.base.ObjectiveBase`

Finite differences (FDs) for derivatives.

Given an objective that gives function values and/or residuals, this class allows to flexibly obtain all derivatives calculated via FDs.

For the parameters *grad*, *hess*, *sres*, a value of `None` means that the objective derivative is used if available, otherwise resorting to FDs. `True` means that FDs are used in any case, `False` means that the derivative is not exported.

Note that the step sizes should be carefully chosen. They should be small enough to provide an accurate linear approximation, but large enough to be robust against numerical inaccuracies, in particular if the objective relies on numerical approximations, such as an ODE.

Parameters

- **grad** – Derivative method for the gradient (see above).
- **hess** – Derivative method for the Hessian (see above).
- **sres** – Derivative method for the residual sensitivities (see above).
- **hess_via_fval** – If the Hessian is to be calculated via finite differences: whether to employ 2nd order FDs via fval even if the objective can provide a gradient.
- **delta_fun** – FD step sizes for function values. Can be either a float, or a `np.ndarray` of shape (*n_par*,) for different step sizes for different coordinates.
- **delta_grad** – FD step sizes for gradients, if the Hessian is calculated via 1st order sensitivities from the gradients. Similar to *delta_fun*.
- **delta_res** – FD step sizes for residuals. Similar to *delta_fun*.
- **method** – Method to calculate FDs. Can be any of *FD.METHODS*: central, forward or backward differences. The latter two require only roughly half as many function evaluations, are however less accurate than central ($O(x)$ vs $O(x^{**2})$).
- **x_names** – Parameter names that can be optionally used in, e.g., history or gradient checks.

Examples

Define residuals and objective function, and obtain all derivatives via FDs:

```
>>> from pypesto import Objective, FD
>>> import numpy as np
>>> x_obs = np.array([11, 12, 13])
>>> res = lambda x: x - x_obs
>>> fun = lambda x: 0.5 * sum(res(x)**2)
>>> obj = FD(Objective(fun=fun, res=res))
```

```
BACKWARD = 'backward'
CENTRAL = 'central'
FORWARD = 'forward'
METHODS = ['central', 'forward', 'backward']

__init__(obj: pypesto.objective.base.ObjectiveBase, grad: Optional[bool] = None, hess: Optional[bool] = None, sres: Optional[bool] = None, hess_via_fval: bool = True, delta_fun: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_grad: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_res: Union[pypesto.objective.finite_difference.FDDelta, float, numpy.ndarray, str] = 1e-06, method: str = 'central', x_names: Optional[List[str]] = None)
    Initialize self. See help(type(self)) for accurate signature.
```

```
call_unprocessed(x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, **kwargs) → Dict[str, Union[float, numpy.ndarray, Dict]]
    See ObjectiveBase for more documentation.
```

Main method to overwrite from the base class. It handles and delegates the actual objective evaluation.

property has_fun

Check whether function is defined.

property has_grad

Check whether gradient is defined.

property has_hess

Check whether Hessian is defined.

property has_res

Check whether residuals are defined.

property has_sres

Check whether residual sensitivities are defined.

```
class pypesto.FDDelta(delta: Optional[Union[numpy.ndarray, float]] = None, test_deltas: Optional[numpy.ndarray] = None, update_condition: str = 'constant', max_distance: float = 0.5, max_steps: int = 30)
    Bases: object
```

Finite difference step size with automatic updating.

Reference implementation: <https://github.com/ICB-DCM/PESTO/blob/master/private/getStepSizeFD.m>

Parameters

- **delta** – (Initial) step size, either a float, or a vector of size (n_par,). If not None, this is used as initial step size.
- **test_deltas** – Step sizes to try out in step size selection. If None, a range [1e-1, 1e-2, ..., 1e-8] is considered.

- **update_condition** – A “good” step size may be a local property. Thus, this class allows updating the step size if certain criteria are met, in the `pypesto.objective.finite_difference.FDDelta.update()` function. FDDelta.CONSTANT means that the step size is only initially selected. FDDelta.DISTANCE means that the step size is updated if the current evaluation point is sufficiently far away from the last training point. FDDelta.STEPS means that the step size is updated `max_steps` evaluations after the last update.
- **max_distance** – Coefficient on the distance between current and reference point beyond which to update, in the `FDDelta.DISTANCE` update condition.
- **max_steps** – Number of steps after which to update in the `FDDelta.STEPS` update condition.

```
CONSTANT = 'constant'
DISTANCE = 'distance'
STEPS = 'steps'
UPDATE_CONDITIONS = ['constant', 'distance', 'steps']

__init__(delta: Optional[Union[numpy.ndarray, float]] = None, test_deltas: Optional[numpy.ndarray] = None, update_condition: str = 'constant', max_distance: float = 0.5, max_steps: int = 30)
    Initialize self. See help(type(self)) for accurate signature.

get() → numpy.ndarray
    Get delta vector.

update(x: numpy.ndarray, fval: Optional[Union[float, numpy.ndarray]], fun: Callable, fd_method: str) → None
    Update delta if update conditions are met.
```

Parameters

- **x** – Current parameter vector, shape (n_par,).
- **fval** – `fun(x)`, to avoid re-evaluation. Scalar- or vector-valued.
- **fun** – Function whose 1st-order derivative to approximate. Scalar- or vector-valued.
- **fd_method** – FD method employed by `pypesto.objective.finite_difference.FD`, see there.

```
class pypesto.Hdf5History(id: str, file: str, options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None)
    Bases: pypesto.objective.history.History
    Stores a representation of the history in an HDF5 file.
```

Parameters

- **id** – Id of the history
- **file** – HDF5 file name.
- **options** – History options.

```
__init__(id: str, file: str, options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None)
    Initialize self. See help(type(self)) for accurate signature.
```

finalize()

See `History` docstring.

```
get_chi2_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_fval_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_grad_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_hess_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_history_directory()
```

Return filepath.

```
get_res_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_schi2_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_sres_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_time_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
          np.nan]
```

Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_x_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) → Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]
 Return parameters.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

static load (*id: str, file: str*)
 Load the History object from memory.

property n_fval
 See *HistoryBase* docstring.

property n_grad
 See *HistoryBase* docstring.

property n_hess
 See *HistoryBase* docstring.

property n_res
 See *HistoryBase* docstring.

property n_sres
 See *HistoryBase* docstring.

property trace_save_iter
 After how many iterations to store the trace.

update (*x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, result: Dict[str, Union[float, numpy.ndarray]]*) → None
 See *History* docstring.

class pypesto.History (*options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None*)

Bases: *pypesto.objective.history.HistoryBase*

Track number of function evaluations only, no trace.

Parameters options – History options.

__init__ (*options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None*)
 Initialize self. See help(type(self)) for accurate signature.

finalize()
 See *HistoryBase* docstring.

property n_fval
 See *HistoryBase* docstring.

property n_grad
 See *HistoryBase* docstring.

property n_hess
 See *HistoryBase* docstring.

property n_res
 See *HistoryBase* docstring.

property n_sres
 See *HistoryBase* docstring.

property start_time

See *HistoryBase* docstring.

update (*x*: *numpy.ndarray*, *sensi_orders*: *Tuple[int, ...]*, *mode*: *str*, *result*: *Dict[str, Union[float, numpy.ndarray]]*) → *None*

Update history after a function evaluation.

Parameters

- **x** – The parameter vector.
- **sensi_orders** – The sensitivity orders computed.
- **mode** – The objective function mode computed (function value or residuals).
- **result** – The objective function values for parameters *x*, sensitivities *sensi_orders* and mode *mode*.

class *pypesto.HistoryBase*

Bases: *abc.ABC*

Abstract base class for history objects.

Can be used as a dummy history, but does not implement any history functionality.

finalize()

Finalize history. Called after a run.

get_chi2_trace (*ix*: *Optional[Union[Sequence[int], int]]* = *None*, *trim*: *bool* = *False*) → *Union[Sequence[float], float]*

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_fval_trace (*ix*: *Optional[Union[Sequence[int], int]]* = *None*, *trim*: *bool* = *False*) → *Union[Sequence[float], float]*

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_grad_trace (*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) → *Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]*

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_hess_trace (*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) → *Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]*

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_res_trace (*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) → *Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]*

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_schi2_trace (*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) → *Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]*

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_sres_trace (*ix: Optional[Union[int, Sequence[int]]] = None, trim: bool = False*) →
 Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]
 Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_time_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
 Union[Sequence[float], float]
 Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_trimmed_indices()
 Get indices for a monotonically decreasing history.

get_x_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
 Union[Sequence[numpy.ndarray], numpy.ndarray]
 Return parameters.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

property n_fval
 Return number of function evaluations.

property n_grad
 Return number of gradient evaluations.

property n_hess
 Return number of Hessian evaluations.

property n_res
 Return number of residual evaluations.

property n_sres
 Return number of residual sensitivity evaluations.

property start_time
 Return start time.

update (*x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, result: Dict[str, Union[float, numpy.ndarray]]*) → None
 Update history after a function evaluation.

Parameters

- **x** – The parameter vector.
- **sensi_orders** – The sensitivity orders computed.
- **mode** – The objective function mode computed (function value or residuals).
- **result** – The objective function values for parameters *x*, sensitivities *sensi_orders* and mode *mode*.

class `pypesto.HistoryOptions` (*trace_record: bool = False, trace_record_grad: bool = True, trace_record_hess: bool = True, trace_record_res: bool = True, trace_record_sres: bool = True, trace_record_chi2: bool = True, trace_record_schi2: bool = True, trace_save_iter: int = 10, storage_file: Optional[str] = None*)

Bases: `dict`

Options for the objective that are used in optimization.

In addition implements a factory pattern to generate history objects.

Parameters

- `trace_record` – Flag indicating whether to record the trace of function calls. The `trace_record_*` flags only become effective if `trace_record` is True.
- `trace_record_grad` – Flag indicating whether to record the gradient in the trace.
- `trace_record_hess` – Flag indicating whether to record the Hessian in the trace.
- `trace_record_res` – Flag indicating whether to record the residual in the trace.
- `trace_record_sres` – Flag indicating whether to record the residual sensitivities in the trace.
- `trace_record_chi2` – Flag indicating whether to record the chi2 in the trace.
- `trace_record_schi2` – Flag indicating whether to record the chi2 sensitivities in the trace.
- `trace_save_iter` – After how many iterations to store the trace.
- `storage_file` – File to save the history to. Can be any of None, a “{filename}.csv”, or a “{filename}.hdf5” file. Depending on the values, the `create_history` method creates the appropriate object. Occurrences of “{id}” in the file name are replaced by the `id` upon creation of a history, if applicable.

`__init__(trace_record: bool = False, trace_record_grad: bool = True, trace_record_hess: bool = True, trace_record_res: bool = True, trace_record_sres: bool = True, trace_record_chi2: bool = True, trace_record_schi2: bool = True, trace_save_iter: int = 10, storage_file: Optional[str] = None)`

Initialize self. See help(type(self)) for accurate signature.

`static assert_instance(maybe_options: Union[pypesto.objective.history.HistoryOptions, Dict]) → pypesto.objective.history.HistoryOptions`

Return a valid options object.

`Parameters maybe_options (HistoryOptions or dict) –`

`create_history(id: str, x_names: Sequence[str]) → pypesto.objective.history.History`

Create a `History` object; Factory method.

Parameters

- `id` – Identifier for the history.
- `x_names` – Parameter names.

`class pypesto.MemoryHistory(options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None)`

Bases: `pypesto.objective.history.History`

Class for optimization history stored in memory.

Track number of function evaluations and keeps an in-memory trace of function evaluations.

`Parameters options – History options.`

`__init__(options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None)`

Initialize self. See help(type(self)) for accurate signature.

get_chi2_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_fval_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_grad_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_hess_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_res_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_schi2_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_sres_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_time_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_x_trace (ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) → Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]
Return parameters.
```

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
update (x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, result: Dict[str, Union[float, numpy.ndarray]]) → None
```

See *History* docstring.

```
class pypesto.NegLogPriors (objectives: Sequence[pypesto.objective.base.ObjectiveBase],  
                                x_names: Optional[Sequence[str]] = None)
```

Bases: pypesto.objective.aggregated.AggregatedObjective

Aggregates different forms of negative log-prior distributions.

Allows to distinguish priors from the likelihood by testing the type of an objective.

Consists basically of a list of individual negative log-priors, given in self.objectives.

```
class pypesto.Objective (fun: Optional[Callable] = None, grad: Optional[Union[Callable, bool]] = None, hess: Optional[Callable] = None, hessp: Optional[Callable] = None, res: Optional[Callable] = None, sres: Optional[Union[Callable, bool]] = None, x_names: Optional[Sequence[str]] = None)
```

Bases: pypesto.objective.base.ObjectiveBase

Objective class.

The objective class allows the user explicitly specify functions that compute the function value and/or residuals as well as respective derivatives.

Denote dimensions n = parameters, m = residuals.

Parameters

- **fun** – The objective function to be minimized. If it only computes the objective function value, it should be of the form

```
fun (x) → float
```

where x is an 1-D array with shape (n,), and n is the parameter space dimension.

- **grad** – Method for computing the gradient vector. If it is a callable, it should be of the form

```
grad(x) → array_like, shape (n,).
```

If its value is True, then fun should return the gradient as a second output.

- **hess** – Method for computing the Hessian matrix. If it is a callable, it should be of the form

```
hess(x) → array, shape (n, n).
```

If its value is True, then fun should return the gradient as a second, and the Hessian as a third output, and grad should be True as well.

- **hessp** – Method for computing the Hessian vector product, i.e.

```
hessp(x, v) → array_like, shape (n,)
```

computes the product H^*v of the Hessian of fun at x with v.

- **res** – Method for computing residuals, i.e.

```
res(x) → array_like, shape (m,).
```

- **sres** – Method for computing residual sensitivities. If it is a callable, it should be of the form

```
sres(x) -> array, shape (m, n).
```

If its value is True, then res should return the residual sensitivities as a second output.

- **x_names** – Parameter names. None if no names provided, otherwise a list of str, length dim_full (as in the Problem class). Can be read by the problem.

__init__(*fun*: Optional[Callable] = None, *grad*: Optional[Union[Callable, bool]] = None, *hess*: Optional[Callable] = None, *hessp*: Optional[Callable] = None, *res*: Optional[Callable] = None, *sres*: Optional[Union[Callable, bool]] = None, *x_names*: Optional[Sequence[str]] = None)

Initialize self. See help(type(self)) for accurate signature.

call_unprocessed(*x*: numpy.ndarray, *sensi_orders*: Tuple[int, ...], *mode*: str, **kwargs) → Dict[str, Union[float, numpy.ndarray, Dict]]

Call objective function without pre- or post-processing and formatting.

Returns A dict containing the results.

Return type result

get_config() → dict

Return basic information of the objective configuration.

property has_fun

Check whether function is defined.

property has_grad

Check whether gradient is defined.

property has_hess

Check whether Hessian is defined.

property has_hessp

property has_res

Check whether residuals are defined.

property has_sres

Check whether residual sensitivities are defined.

class pypesto.ObjectiveBase(*x_names*: Optional[Sequence[str]] = None)

Bases: abc.ABC

Abstract objective class.

The objective class is a simple wrapper around the objective function, giving a standardized way of calling. Apart from that, it manages several things including fixing of parameters and history.

The objective function is assumed to be in the format of a cost function, log-likelihood function, or log-posterior function. These functions are subject to minimization. For profiling and sampling, the sign is internally flipped, all returned and stored values are however given as returned by this objective function. If maximization is to be performed, the sign should be flipped before creating the objective function.

Parameters **x_names** – Parameter names that can be optionally used in, e.g., history or gradient checks.

history

For storing the call history. Initialized by the methods, e.g. the optimizer, in *initialize_history()*.

pre_post_processor

Preprocess input values to and postprocess output values from `__call__`. Configured in `update_from_problem()`.

`__call__(x: numpy.ndarray, sensi_orders: Tuple[int, ...] = (0), mode: str = 'mode_fun', return_dict: bool = False, **kwargs) → Union[float, numpy.ndarray, Tuple, Dict[str, Union[float, numpy.ndarray, Dict]]]`

Obtain arbitrary sensitivities.

This is the central method which is always called, also by the `get_*` methods.

There are different ways in which an optimizer calls the objective function, and in how the objective function provides information (e.g. derivatives via separate functions or along with the function values). The different calling modes increase efficiency in space and time and make the objective flexible.

Parameters

- `x` – The parameters for which to evaluate the objective function.
- `sensi_orders` – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- `mode` – Whether to compute function values or residuals.
- `return_dict` – If False (default), the result is a Tuple of the requested values in the requested order. Tuples of length one are flattened. If True, instead a dict is returned which can carry further information.

Returns By default, this is a tuple of the requested function values and derivatives in the requested order (if only 1 value, the tuple is flattened). If `return_dict`, then instead a dict is returned with function values and derivatives indicated by ids.

Return type result

`__init__(x_names: Optional[Sequence[str]] = None)`

Initialize self. See help(type(self)) for accurate signature.

`abstract call_unprocessed(x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, **kwargs) → Dict[str, Union[float, numpy.ndarray, Dict]]`

Call objective function without pre- or post-processing and formatting.

Parameters

- `x` – The parameters for which to evaluate the objective function.
- `sensi_orders` – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- `mode` – Whether to compute function values or residuals.

Returns A dict containing the results.

Return type result

`check_grad(x: numpy.ndarray, x_indices: Optional[Sequence[int]] = None, eps: float = 1e-05, verbosity: int = 1, mode: str = 'mode_fun', order: int = 0, detailed: bool = False) → pandas.core.frame.DataFrame`

Compare gradient evaluation.

Firstly approximate via finite differences, and secondly use the objective gradient.

Parameters

- `x` – The parameters for which to evaluate the gradient.
- `x_indices` – Indices for which to compute gradients. Default: all.
- `eps` – Finite differences step size.

- **verbosity** – Level of verbosity for function output. 0: no output, 1: summary for all parameters, 2: summary for individual parameters.
- **mode** – Residual (MODE_RES) or objective function value (MODE_FUN) computation mode.
- **order** – Derivative order, either gradient (0) or Hessian (1).
- **detailed** – Toggle whether additional values are returned. Additional values are function values, and the central difference weighted by the difference in output from all methods (standard deviation and mean).

Returns gradient, finite difference approximations and error estimates.

Return type result

```
check_grad_multi_eps(*args, multi_eps: Optional[Iterable] = None, label: str = 'rel_err',
                      **kwargs)
```

Compare gradient evaluation.

Equivalent to the *ObjectiveBase.check_grad* method, except multiple finite difference step sizes are tested. The result contains the lowest finite difference for each parameter, and the corresponding finite difference step size.

Parameters

- **ObjectiveBase.check_grad** method parameters. (All) –
- **multi_eps** – The finite difference step sizes to be tested.
- **label** – The label of the column that will be minimized for each parameter. Valid options are the column labels of the dataframe returned by the *ObjectiveBase.check_grad* method.

```
check_gradients_match_finite_differences(*args, x: Optional[numumpy.ndarray] = None,
                                         x_free: Optional[Sequence[int]] = None,
                                         rtol: float = 0.01, atol: float = 0.001,
                                         mode: Optional[str] = None, order: int =
                                         0, multi_eps=None, **kwargs) → bool
```

Check if gradients match finite differences (FDs).

Parameters

- **rtol** (*relative error tolerance*) –
- **x** (*The parameters for which to evaluate the gradient*) –
- **x_free** (*Indices for which to compute gradients*) –
- **rtol** –
- **atol** (*absolute error tolerance*) –
- **mode** (*function values or residuals*) –
- **order** (*gradient order, 0 for gradient, 1 for hessian*) –
- **multi_eps** (*multiple test step width for FDs*) –

Returns Indicates whether gradients match (True) FDs or not (False)

Return type bool

```
check_mode(mode: str) → bool
```

Check if the objective is able to compute in the requested mode.

Either *check_mode* or the *fun_...* functions must be overwritten in derived classes.

Parameters `mode` – Whether to compute function values or residuals.

Returns Boolean indicating whether mode is supported

Return type flag

check_sensi_orders (`sensi_orders: Tuple[int, ...], mode: str`) → bool

Check if the objective is able to compute the requested sensitivities.

Either `check_sensi_orders` or the `fun_...` functions must be overwritten in derived classes.

Parameters

- `sensi_orders` – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- `mode` – Whether to compute function values or residuals.

Returns Boolean indicating whether combination of sensi_orders and mode is supported

Return type flag

get_config() → dict

Get the configuration information of the objective function.

Return it as a dictionary.

get_fval (`x: numpy.ndarray`) → float

Get the function value at x.

get_grad (`x: numpy.ndarray`) → numpy.ndarray

Get the gradient at x.

get_hess (`x: numpy.ndarray`) → numpy.ndarray

Get the Hessian at x.

get_res (`x: numpy.ndarray`) → numpy.ndarray

Get the residuals at x.

get_sres (`x: numpy.ndarray`) → numpy.ndarray

Get the residual sensitivities at x.

property has_fun

Check whether function is defined.

property has_grad

Check whether gradient is defined.

property has_hess

Check whether Hessian is defined.

property has_hessp

property has_res

Check whether residuals are defined.

property has_sres

Check whether residual sensitivities are defined.

initialize()

Initialize the objective function.

This function is used at the beginning of an analysis, e.g. optimization, and can e.g. reset the objective memory. By default does nothing.

```
static output_to_tuple(sensi_orders: Tuple[int, ...], mode: str, **kwargs: Union[float,
    numpy.ndarray]) → Tuple
```

Return values as requested by the caller.

Usually only a subset of outputs is demanded. One output is returned as-is, more than one output are returned as a tuple in order (fval, grad, hess).

```
update_from_problem(dim_full: int, x_free_indices: Sequence[int], x_fixed_indices: Sequence[int],
    x_fixed_vals: Sequence[float])
```

Handle fixed parameters.

Later, the objective will be given parameter vectors x of dimension dim , which have to be filled up with fixed parameter values to form a vector of dimension $\text{dim_full} \geq \text{dim}$. This vector is then used to compute function value and derivatives. The derivatives must later be reduced again to dimension dim .

This is so as to make the fixing of parameters transparent to the caller.

The methods preprocess, postprocess are overwritten for the above functionality, respectively.

Parameters

- **dim_full** – Dimension of the full vector including fixed parameters.
- **x_free_indices** – Vector containing the indices (zero-based) of free parameters (complimentary to x_fixed_indices).
- **x_fixed_indices** – Vector containing the indices (zero-based) of parameter components that are not to be optimized.
- **x_fixed_vals** – Vector of the same length as x_fixed_indices, containing the values of the fixed parameters.

```
property x_names
```

Parameter names.

```
class pypesto.OptimizeResult
```

Bases: `object`

Result of the `pypesto.optimize.minimize()` function.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
append(optimizer_result: optimize.OptimizerResult)
```

Append an optimizer result to the result object.

Parameters `optimizer_result` – The result of one (local) optimizer run.

```
as_dataframe(keys=None) → pandas.core.frame.DataFrame
```

Get as pandas DataFrame.

If keys is a list, return only the specified values, otherwise all.

```
as_list(keys=None) → Sequence
```

Get as list.

If keys is a list, return only the specified values.

Parameters `keys` (`list(str)`, optional) – Labels of the field to extract.

```
get_for_key(key) → list
```

Extract the list of values for the specified key as a list.

```
sort()
```

Sort the optimizer results by function value fval (ascending).

```
class pypesto.OptimizerHistory(history: pypesto.objective.history.History, x0: numpy.ndarray,  
                                generate_from_history: bool = False)
```

Bases: `object`

Objective call history.

Container around a History object, which keeps track of optimal values.

fval0, fval_min

Initial and best function value found.

chi20, chi2_min

Initial and best chi2 value found.

x0, x_min

Initial and best parameters found.

grad_min

gradient for best parameters

hess_min

hessian (approximation) for best parameters

res_min

residuals for best parameters

sres_min

residual sensitivities for best parameters

Parameters

- **history** – History object to attach to this container. This history object implements the storage of the actual history.
- **x0** – Initial values for optimization
- **generate_from_history** – If set to true, this function will try to fill attributes of this function based on the provided history

```
__init__(history: pypesto.objective.history.History, x0: numpy.ndarray, generate_from_history: bool  
        = False) → None
```

Initialize self. See help(type(self)) for accurate signature.

extract_from_history(var, ix)

Get value of `var` at iteration `ix`.

finalize()

Finalize history.

```
update(x: numpy.ndarray, sensi_orders: Tuple[int], mode: str, result: Dict[str, Union[float,  
                                         numpy.ndarray]]) → None
```

Update history and best found value.

```
class pypesto.Problem(objective: pypesto.objective.base.ObjectiveBase, lb: Union[numumpy.ndarray,
    List[float]], ub: Union[numumpy.ndarray, List[float]], dim_full: Optional[int]
    = None, x_fixed_indices: Optional[Union[Iterable[SupportsInt], SupportsInt]] = None,
    x_fixed_vals: Optional[Union[Iterable[SupportsFloat], SupportsFloat]] = None,
    x_guesses: Optional[Iterable[float]] = None, startpoint_method: Optional[Callable] = None,
    x_names: Optional[Iterable[str]] = None, x_scales: Optional[Iterable[str]] = None,
    x_priors_defs: Optional[pypesto.objective.priors.NegLogPriors] = None,
    lb_init: Optional[Union[numumpy.ndarray, List[float]]] = None, ub_init:
    Optional[Union[numumpy.ndarray, List[float]]] = None, copy_objective: bool
    = True)
```

Bases: `object`

The problem formulation.

A problem specifies the objective function, boundaries and constraints, parameter guesses as well as the parameters which are to be optimized.

Parameters

- **objective** – The objective function for minimization. Note that a shallow copy is created.
- **lb** – The lower and upper bounds for optimization. For unbounded directions set to +inf.
- **ub** – The lower and upper bounds for optimization. For unbounded directions set to +inf.
- **lb_init** – The lower and upper bounds for initialization, typically for defining search start points. If not set, set to lb, ub.
- **ub_init** – The lower and upper bounds for initialization, typically for defining search start points. If not set, set to lb, ub.
- **dim_full** – The full dimension of the problem, including fixed parameters.
- **x_fixed_indices** – Vector containing the indices (zero-based) of parameter components that are not to be optimized.
- **x_fixed_vals** – Vector of the same length as x_fixed_indices, containing the values of the fixed parameters.
- **x_guesses** – Guesses for the parameter values, shape (g, dim), where g denotes the number of guesses. These are used as start points in the optimization.
- **startpoint_method** – Callable. `startpoint_method(n_starts)` returns a n_starts x n_free_indices array of initial values for the optimization.
- **x_names** – Parameter names that can be optionally used e.g. in visualizations. If objective.get_x_names() is not None, those values are used, else the values specified here are used if not None, otherwise the variable names are set to ['x0', ... 'x{dim_full}']. The list must always be of length dim_full.
- **x_scales** – Parameter scales can be optionally given and are used e.g. in visualisation and prior generation. Currently the scales 'lin', 'log' and 'log10' are supported.
- **x_priors_defs** – Definitions of priors for parameters. Types of priors, and their required and optional parameters, are described in the *Prior* class.
- **copy_objective** – Whether to generate a deep copy of the objective function before potential modification the problem class performs on it.

Notes

On the fixing of parameter values:

The number of parameters dim_full the objective takes as input must be known, so it must be either lb a vector of that size, or dim_full specified as a parameter.

All vectors are mapped to the reduced space of dimension dim in `__init__`, regardless of whether they were in dimension dim or dim_full before. If the full representation is needed, the methods `get_full_vector()` and `get_full_matrix()` can be used.

```
__init__(objective: pypesto.objective.base.ObjectiveBase, lb: Union[numpy.ndarray, List[float]], ub:
         Union[numpy.ndarray, List[float]], dim_full: Optional[int] = None, x_fixed_indices:
         Optional[Union[Iterable[SupportsInt], SupportsInt]] = None, x_fixed_vals: Optional[Union[Iterable[SupportsFloat], SupportsFloat]] = None, x_guesses: Optional[Iterable[float]] = None, startpoint_method: Optional[Callable] = None,
         x_names: Optional[Iterable[str]] = None, x_scales: Optional[Iterable[str]] = None, x_priors_defs: Optional[pypesto.objective.priors.NegLogPriors] = None,
         lb_init: Optional[Union[numpy.ndarray, List[float]]] = None, ub_init: Optional[Union[numpy.ndarray, List[float]]] = None, copy_objective: bool = True)
```

Initialize self. See help(type(self)) for accurate signature.

property dim

Return dimension only considering non fixed parameters.

```
fix_parameters(parameter_indices: Union[Iterable[SupportsInt], SupportsInt], parameter_vals:
                Union[Iterable[SupportsFloat], SupportsFloat]) → None
```

Fix specified parameters to specified values.

full_index_to_free_index(full_index: int)

Calculate index in reduced vector from index in full vector.

Parameters `full_index` (The index in the full vector.) –

Returns `free_index`

Return type The index in the free vector.

get_full_matrix(x: Optional[numpy.ndarray]) → Optional[numpy.ndarray]

Map matrix from dim to dim_full. Usually used for hessian.

Parameters `x` (array_like, `shape=(dim, dim)`) – The matrix in dimension dim.

```
get_full_vector(x: Optional[numpy.ndarray], x_fixed_vals: Optional[Iterable[float]] = None) →
    Optional[numpy.ndarray]
```

Map vector from dim to dim_full. Usually used for x, grad.

Parameters

- `x` (array_like, `shape=(dim,)`) – The vector in dimension dim.
- `x_fixed_vals` (array_like, `ndim=1, optional`) – The values to be used for the fixed indices. If None, then nans are inserted. Usually, None will be used for grad and problem.x_fixed_vals for x.

get_reduced_matrix(x_full: Optional[numpy.ndarray]) → Optional[numpy.ndarray]

Map matrix from dim_full to dim, i.e. delete fixed indices.

Parameters `x_full` (array_like, `ndim=2`) – The matrix in dimension dim_full.

```
get_reduced_vector(x_full: Optional[numpy.ndarray], x_indices: Optional[List[int]] = None) →
    Optional[numpy.ndarray]
```

Keep only those elements, which indices are specified in x_indices.

If `x_indices` is not provided, delete fixed indices.

Parameters

- `x_full` (`array_like`, `ndim=1`) – The vector in dimension `dim_full`.
- `x_indices` – indices of `x_full` that should remain

`property lb`

Return lower bounds of free parameters.

`property lb_init`

Return initial lower bounds of free parameters.

`normalize() → None`

Process vectors.

Reduce all vectors to dimension `dim` and have the objective accept vectors of dimension `dim`.

`print_parameter_summary() → None`

Print a summary of parameters.

Include what parameters are being optimized and parameter boundaries.

`set_x_guesses(x_guesses: Iterable[float])`

Set the `x_guesses` of a problem.

Parameters `x_guesses` –

`property ub`

Return upper bounds of free parameters.

`property ub_init`

Return initial upper bounds of free parameters.

`unfix_parameters(parameter_indices: Union[Iterable[SupportsInt], SupportsInt]) → None`

Free specified parameters.

`property x_free_indices`

Return non fixed parameters.

`property x_guesses`

Return guesses of the free parameter values.

`class pypesto.ProfileResult`

Bases: `object`

Result of the profile() function.

It holds a list of profile lists. Each profile list consists of a list of `ProfilerResult` objects, one for each parameter.

`__init__()`

Initialize self. See `help(type(self))` for accurate signature.

`append_empty_profile_list() → int`

Append an empty profile list to the list of profile lists.

Returns The index of the created profile list.

Return type `index`

`append_profiler_result(profiler_result: profile.ProfilerResult = None, profile_list: int = None) → None`

Append the profiler result to the profile list.

Parameters

- **profiler_result** – The result of one profiler run for a parameter, or None if to be left empty.
- **profile_list** – Index specifying the profile list to which we want to append. Defaults to the last list.

get_profiler_result (*i_par*: *int*, *profile_list*: *Optional[int]* = *None*)

Get the profiler result at parameter index *i_par* of *profile_list*.

Parameters

- **i_par** – Integer specifying the profile index.
- **profile_list** – Index specifying the profile list. Defaults to the last list.

set_profiler_result (*profiler_result*: *profile.ProfilerResult*, *i_par*: *int*, *profile_list*: *int* = *None*)

→ *None*

Write a profiler result to the result object.

Parameters

- **profiler_result** – The result of one (local) profiler run.
- **i_par** – Integer specifying the parameter index where to put profiler_result.
- **profile_list** – Index specifying the profile list. Defaults to the last list.

class *pypesto.Result* (*problem=None*)

Bases: *object*

Universal result object for pypesto.

The algorithms like optimize, profile, sample fill different parts of it.

problem

The problem underlying the results.

Type *pypesto.Problem*

optimize_result

The results of the optimizer runs.

profile_result

The results of the profiler run.

sample_result

The results of the sampler run.

__init__

(*problem=None*)

Initialize self. See help(type(self)) for accurate signature.

class *pypesto.SampleResult*

Bases: *object*

Result of the sample() function.

__init__

()

Initialize self. See help(type(self)) for accurate signature.

4.2 Objective

```
class pypesto.objective.AggregatedObjective (objectives: Sequence[pypesto.objective.base.ObjectiveBase], x_names: Optional[Sequence[str]] = None)
```

Bases: pypesto.objective.base.ObjectiveBase

Aggregates multiple objectives into one objective.

```
__init__ (objectives: Sequence[pypesto.objective.base.ObjectiveBase], x_names: Optional[Sequence[str]] = None)
```

Initialize objective.

Parameters

- **objectives** – Sequence of pypesto.ObjectiveBase instances
- **x_names** – Sequence of names of the (optimized) parameters. (Details see documentation of x_names in [pypesto.ObjectiveBase](#))

```
call_unprocessed (x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, **kwargs) → Dict[str, Union[float, numpy.ndarray, Dict]]
```

See *ObjectiveBase* for more documentation.

Main method to overwrite from the base class. It handles and delegates the actual objective evaluation.

```
check_mode (mode: str) → bool
```

See *ObjectiveBase* documentation.

```
check_sensi_orders (sensi_orders: Tuple[int, ...], mode: str) → bool
```

See *ObjectiveBase* documentation.

```
get_config () → dict
```

Return basic information of the objective configuration.

```
initialize ()
```

See *ObjectiveBase* documentation.

```
class pypesto.objective.AmiciCalculator
```

Bases: object

Class to perform the AMICI call and obtain objective function values.

```
__call__ (x_dct: Dict, sensi_order: int, mode: str, amici_model: Union[amici.Model, amici.ModelPtr], amici_solver: Union[amici.Solver, amici.SolverPtr], edatas: List[amici.ExpData], n_threads: int, x_ids: Sequence[str], parameter_mapping: ParameterMapping, fim_for_hess: bool)
```

Perform the actual AMICI call.

Called within the AmiciObjective.__call__() method.

Parameters

- **x_dct** – Parameters for which to compute function value and derivatives.
- **sensi_order** – Maximum sensitivity order.
- **mode** – Call mode (function value or residual based).
- **amici_model** – The AMICI model.
- **amici_solver** – The AMICI solver.
- **edatas** – The experimental data.

- **n_threads** – Number of threads for AMICI call.
- **x_ids** – Ids of optimization parameters.
- **parameter_mapping** – Mapping of optimization to simulation parameters.
- **fim_for_hess** – Whether to use the FIM (if available) instead of the Hessian (if requested).

__init__()

Initialize self. See help(type(self)) for accurate signature.

initialize()

Initialize the calculator. Default: Do nothing.

class pypesto.objective.AmiciObjectBuilder

Bases: abc.ABC

Allows to build AMICI model, solver, and edatas.

This class is useful for pickling an `pypesto.AmiciObjective`, which is required in some parallelization schemes. Therefore, this class itself must be pickleable.

abstract create_edatas (`model: Union[amici.Model, amici.ModelPtr]`) → Sequence[`amici.ExpData`]
Create AMICI experimental data.

abstract create_model () → `Union[amici.Model, amici.ModelPtr]`
Create an AMICI model.

abstract create_solver (`model: Union[amici.Model, amici.ModelPtr]`) → `Union[amici.Solver, amici.SolverPtr]`
Create an AMICI solver.

class pypesto.objective.AmiciObjective (`amici_model: Union[amici.Model, amici.ModelPtr], amici_solver: Union[amici.Solver, amici.SolverPtr], amici_object_builder: Optional[pypesto.objective.amici.AmiciObjectBuilder] = None, calculator: Optional[pypesto.objective.amici_calculator.AmiciCalculator] = None`)
Bases: `pypesto.objective.base.ObjectiveBase`

Allows to create an objective directly from an amici model.

__init__ (`amici_model: Union[amici.Model, amici.ModelPtr], amici_solver: Union[amici.Solver, amici.SolverPtr], amici_object_builder: Optional[pypesto.objective.amici.AmiciObjectBuilder] = None, calculator: Optional[pypesto.objective.amici_calculator.AmiciCalculator] = None, edatas: Union[Sequence[amici.ExpData], amici.ExpData], max_sensi_order: Optional[int] = None, n_threads: Optional[int] = 1, fim_for_hess: Optional[bool] = True, x_ids: Optional[Sequence[str]] = None, x_names: Optional[Sequence[str]] = None, parameter_mapping: Optional[ParameterMapping] = None, guess_steadystate: Optional[bool] = None, x_ids: Optional[Sequence[str]] = None, x_names: Optional[Sequence[str]] = None, parameter_mapping: Optional[ParameterMapping] = None, guess_steadystate: Optional[bool] = None, n_threads: Optional[int] = 1, fim_for_hess: Optional[bool] = True, amici_object_builder: Optional[pypesto.objective.amici.AmiciObjectBuilder] = None, calculator: Optional[pypesto.objective.amici_calculator.AmiciCalculator] = None)`)

Initialize objective.

Parameters

- **amici_model** – The amici model.
- **amici_solver** – The solver to use for the numeric integration of the model.
- **edatas** – The experimental data. If a list is passed, its entries correspond to multiple experimental conditions.
- **max_sensi_order** – Maximum sensitivity order supported by the model. Defaults to 2 if the model was compiled with o2mode, otherwise 1.
- **x_ids** – Ids of optimization parameters. In the simplest case, this will be the AMICI model parameters (default).
- **x_names** – Names of optimization parameters.
- **parameter_mapping** – Mapping of optimization parameters to model parameters. Format as created by `amici.petab_objective.create_parameter_mapping`. The default is just to assume that optimization and simulation parameters coincide.
- **guess_steadystate** – Whether to guess steadystates based on previous steadystates and respective derivatives. This option may lead to unexpected results for models with conservation laws and should accordingly be deactivated for those models.
- **n_threads** – Number of threads that are used for parallelization over experimental conditions. If amici was not installed with openMP support this option will have no effect.
- **fim_for_hess** – Whether to use the FIM whenever the Hessian is requested. This only applies with forward sensitivities. With adjoint sensitivities, the true Hessian will be used, if available. FIM or Hessian will only be exposed if `max_sensi_order>1`.
- **amici_object_builder** – AMICI object builder. Allows recreating the objective for pickling, required in some parallelization schemes.
- **calculator** – Performs the actual calculation of the function values and derivatives.

apply_custom_timepoints() → None

Apply custom timepoints, if applicable.

See the `set_custom_timepoints` method for more information.

apply_steadystate_guess(condition_ix: int, x_dct: Dict) → None

Apply steady state guess to `edatas[condition_ix].x0`.

Use the stored steadystate as well as the respective sensitivity (if available) and parameter value to approximate the steadystate at the current parameters using a zeroth or first order taylor approximation: $x_{ss}(x') = x_{ss}(x) + dx_{ss}/dx(x)*(x'-x)$

call_unprocessed(x: `numpy.ndarray`, sensi_orders: Tuple[int, ...], mode: str, edatas: Sequence[`amici.ExpData`] = None, parameter_mapping: ParameterMapping = None)

Call objective function without pre- or post-processing and formatting.

Returns A dict containing the results.

Return type result

check_gradients_match_finite_differences(x: Optional[`numpy.ndarray`] = None, *args, **kwargs) → bool

Check if gradients match finite differences (FDs).

Parameters **x** (*The parameters for which to evaluate the gradient.*) –

Returns Indicates whether gradients match (True) FDs or not (False)

Return type `bool`

`check_mode(mode: str) → bool`

See *ObjectiveBase* documentation.

`check_sensi_orders(sensi_orders: Tuple[int, ...], mode: str) → bool`

See *ObjectiveBase* documentation.

`get_config() → dict`

Return basic information of the objective configuration.

`initialize()`

See *ObjectiveBase* documentation.

`par_arr_to_dict(x: Sequence[float]) → Dict[str, float]`

Create dict from parameter vector.

`reset_steadystate_guesses() → None`

Reset all steady state guess data.

`set_custom_timepoints(timepoints: Optional[Sequence[Sequence[Union[float, int]]]] = None,`

`timepoints_global: Optional[Sequence[Union[float, int]]] = None) →`

`pypesto.objective.amici.AmiciObjective`

Create a copy of this objective that is evaluated at custom timepoints.

The intended use is to aid in predictions at unmeasured timepoints.

Parameters

- **timepoints** – The outer sequence should contain a sequence of timepoints for each experimental condition.
- **timepoints_global** – A sequence of timepoints that will be used for all experimental conditions.

Returns

Return type The customized copy of this objective.

`store_steadystate_guess(condition_ix: int, x_dct: Dict, rdata: amici.ReturnData) → None`

Store condition parameter, steady state and steady state sensitivity.

Stored in steady state guesses if steady state guesses are enabled for this condition.

`class pypesto.objective.CsvHistory(file: str, x_names: Optional[Sequence[str]] = None, options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None, load_from_file: bool = False)`

Bases: `pypesto.objective.history.History`

Stores a representation of the history in a CSV file.

Parameters

- **file** – CSV file name.
- **x_names** – Parameter names.
- **options** – History options.
- **load_from_file** – If True, history will be initialized from data in the specified file

`__init__(file: str, x_names: Optional[Sequence[str]] = None, options: Optional[Union[pypesto.objective.history.HistoryOptions, Dict]] = None, load_from_file: bool = False)`

Initialize self. See help(type(self)) for accurate signature.

finalize()

Finalize history. Called after a run.

get_chi2_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_fval_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_grad_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_hess_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_res_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_schi2_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_sres_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_time_trace (*ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False*) →
Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
np.nan]

Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_x_trace (ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) → Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]
```

Return parameters.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
update (x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, result: Dict[str, Union[float, numpy.ndarray]]) → None
```

See History docstring.

```
class pypesto.objective.FD (obj: pypesto.objective.base.ObjectiveBase, grad: Optional[bool] = None, hess: Optional[bool] = None, sres: Optional[bool] = None, hess_via_fval: bool = True, delta_fun: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_grad: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_res: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, method: str = 'central', x_names: Optional[List[str]] = None)
```

Bases: pypesto.objective.base.ObjectiveBase

Finite differences (FDs) for derivatives.

Given an objective that gives function values and/or residuals, this class allows to flexibly obtain all derivatives calculated via FDs.

For the parameters *grad*, *hess*, *sres*, a value of *None* means that the objective derivative is used if available, otherwise resorting to FDs. *True* means that FDs are used in any case, *False* means that the derivative is not exported.

Note that the step sizes should be carefully chosen. They should be small enough to provide an accurate linear approximation, but large enough to be robust against numerical inaccuracies, in particular if the objective relies on numerical approximations, such as an ODE.

Parameters

- **grad** (*Optional[bool]*) – Derivative method for the gradient (see above).
- **hess** (*Optional[bool]*) – Derivative method for the Hessian (see above).
- **sres** (*Optional[bool]*) – Derivative method for the residual sensitivities (see above).
- **hess_via_fval** (*bool*) – If the Hessian is to be calculated via finite differences: whether to employ 2nd order FDs via fval even if the objective can provide a gradient.
- **delta_fun** (*pypesto.objective.finite_difference.FDDelta*) – FD step sizes for function values. Can be either a float, or a *np.ndarray* of shape (*n_par*,) for different step sizes for different coordinates.
- **delta_grad** (*pypesto.objective.finite_difference.FDDelta*) – FD step sizes for gradients, if the Hessian is calculated via 1st order sensitivities from the gradients. Similar to *delta_fun*.
- **delta_res** (*pypesto.objective.finite_difference.FDDelta*) – FD step sizes for residuals. Similar to *delta_fun*.

- **method** (*str*) – Method to calculate FDs. Can be any of *FD.METHODS*: central, forward or backward differences. The latter two require only roughly half as many function evaluations, are however less accurate than central ($O(x)$ vs $O(x^{**2})$).
- **x_names** – Parameter names that can be optionally used in, e.g., history or gradient checks.

Examples

Define residuals and objective function, and obtain all derivatives via FDs:

```
>>> from pypesto import Objective, FD
>>> import numpy as np
>>> x_obs = np.array([11, 12, 13])
>>> res = lambda x: x - x_obs
>>> fun = lambda x: 0.5 * sum(res(x)**2)
>>> obj = FD(Objective(fun=fun, res=res))
```

```
BACKWARD = 'backward'
CENTRAL = 'central'
FORWARD = 'forward'
METHODS = ['central', 'forward', 'backward']

__init__(obj: pypesto.objective.base.ObjectiveBase, grad: Optional[bool] = None, hess: Optional[bool] = None, sres: Optional[bool] = None, hess_via_fval: bool = True, delta_fun: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_grad: Union[pypesto.objective.finite_difference.FDDelta, numpy.ndarray, float, str] = 1e-06, delta_res: Union[pypesto.objective.finite_difference.FDDelta, float, numpy.ndarray, str] = 1e-06, method: str = 'central', x_names: Optional[List[str]] = None)
    Initialize self. See help(type(self)) for accurate signature.
```

```
call_unprocessed(x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, **kwargs) →
    Dict[str, Union[float, numpy.ndarray, Dict]]
See ObjectiveBase for more documentation.
```

Main method to overwrite from the base class. It handles and delegates the actual objective evaluation.

```
delta_fun: pypesto.objective.finite_difference.FDDelta
delta_grad: pypesto.objective.finite_difference.FDDelta
delta_res: pypesto.objective.finite_difference.FDDelta
grad: Optional[bool]
property has_fun
    Check whether function is defined.
property has_grad
    Check whether gradient is defined.
property has_hess
    Check whether Hessian is defined.
property has_res
    Check whether residuals are defined.
property has_sres
    Check whether residual sensitivities are defined.
hess: Optional[bool]
```

```
    hess_via_fval: bool
    method: str
    obj: pypesto.objective.base.ObjectiveBase
    sres: Optional[bool]

class pypesto.objective.FDDelta(delta: Optional[Union[numpy.ndarray, float]] = None,
                                    test_deltas: Optional[numpy.ndarray] = None, update_condition: str = 'constant', max_distance: float = 0.5, max_steps: int = 30)
Bases: object
```

Finite difference step size with automatic updating.

Reference implementation: <https://github.com/ICB-DCM/PESTO/blob/master/private/getStepSizeFD.m>

Parameters

- **delta** (*Optional[Union[numpy.ndarray, float]]*) – (Initial) step size, either a float, or a vector of size (*n_par*). If not None, this is used as initial step size.
- **test_deltas** (*numpy.ndarray*) – Step sizes to try out in step size selection. If None, a range [1e-1, 1e-2, ..., 1e-8] is considered.
- **update_condition** (*str*) – A “good” step size may be a local property. Thus, this class allows updating the step size if certain criteria are met, in the *pypesto.objective.finite_difference.FDDelta.update()* function. FDDelta.CONSTANT means that the step size is only initially selected. FDDelta.DISTANCE means that the step size is updated if the current evaluation point is sufficiently far away from the last training point. FDDelta.STEPS means that the step size is updated *max_steps* evaluations after the last update.
- **max_distance** (*float*) – Coefficient on the distance between current and reference point beyond which to update, in the *FDDelta.DISTANCE* update condition.
- **max_steps** (*int*) – Number of steps after which to update in the *FDDelta.STEPS* update condition.

```
CONSTANT = 'constant'
DISTANCE = 'distance'
STEPS = 'steps'
UPDATE_CONDITIONS = ['constant', 'distance', 'steps']

__init__(delta: Optional[Union[numpy.ndarray, float]] = None, test_deltas: Optional[numpy.ndarray] = None, update_condition: str = 'constant', max_distance: float = 0.5, max_steps: int = 30)
    Initialize self. See help(type(self)) for accurate signature.

delta: Optional[Union[numpy.ndarray, float]]
get() → numpy.ndarray
    Get delta vector.

max_distance: float
max_steps: int
steps: int
test_deltas: numpy.ndarray
```

update (*x*: `numpy.ndarray`, *fval*: *Optional[Union[float, numpy.ndarray]]*, *fun*: *Callable*, *fd_method*: `str`) → `None`
Update delta if update conditions are met.

Parameters

- **x** – Current parameter vector, shape (n_par,).
- **fval** – *fun(x)*, to avoid re-evaluation. Scalar- or vector-valued.
- **fun** – Function whose 1st-order derivative to approximate. Scalar- or vector-valued.
- **fd_method** – FD method employed by `pypesto.objective.finite_difference.FD`, see there.

update_condition: `str`**x0**: *Optional*[`numpy.ndarray`]

class `pypesto.objective.Hdf5History` (*id*: `str`, *file*: `str`, *options*: *Optional[Union[pypesto.objective.history.HistoryOptions, Dict]]* = `None`)

Bases: `pypesto.objective.history.History`

Stores a representation of the history in an HDF5 file.

Parameters

- **id** – Id of the history
- **file** – HDF5 file name.
- **options** – History options.

__init__ (*id*: `str`, *file*: `str`, *options*: *Optional[Union[pypesto.objective.history.HistoryOptions, Dict]]* = `None`)

Initialize self. See help(type(self)) for accurate signature.

finalize()See *History* docstring.

get_chi2_trace (*ix*: *Optional[Union[Sequence[int], int]]* = `None`, *trim*: `bool` = `False`) → *Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]*

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_fval_trace (*ix*: *Optional[Union[Sequence[int], int]]* = `None`, *trim*: `bool` = `False`) → *Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]*

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_grad_trace (*ix*: *Optional[Union[Sequence[int], int]]* = `None`, *trim*: `bool` = `False`) → *Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]*

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_hess_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
    np.nan]
```

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_history_directory()  
Return filepath.
```

```
get_res_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
    np.nan]
```

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_schi2_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
    np.nan]
```

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_sres_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
    np.nan]
```

Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_time_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,  
    np.nan]
```

Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_x_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →  
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]
```

Return parameters.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
static load(id: str, file: str)
```

Load the History object from memory.

```
property n_fval
```

See *HistoryBase* docstring.

```
property n_grad
```

See *HistoryBase* docstring.

```
property n_hess
```

See *HistoryBase* docstring.

property n_res

See *HistoryBase* docstring.

property n_sres

See *HistoryBase* docstring.

property trace_save_iter

After how many iterations to store the trace.

update (*x*: *numpy.ndarray*, *sensi_orders*: *Tuple[int, ...]*, *mode*: *str*, *result*: *Dict[str, Union[float, numpy.ndarray]]*) → *None*

See *History* docstring.

class *pypesto.objective.History* (*options*: *Optional[Union[pypesto.objective.history.HistoryOptions, Dict]]* = *None*)

Bases: *pypesto.objective.history.HistoryBase*

Track number of function evaluations only, no trace.

Parameters **options** – History options.

__init__ (*options*: *Optional[Union[pypesto.objective.history.HistoryOptions, Dict]]* = *None*)

Initialize self. See help(type(self)) for accurate signature.

finalize()

See *HistoryBase* docstring.

property n_fval

See *HistoryBase* docstring.

property n_grad

See *HistoryBase* docstring.

property n_hess

See *HistoryBase* docstring.

property n_res

See *HistoryBase* docstring.

property n_sres

See *HistoryBase* docstring.

property start_time

See *HistoryBase* docstring.

update (*x*: *numpy.ndarray*, *sensi_orders*: *Tuple[int, ...]*, *mode*: *str*, *result*: *Dict[str, Union[float, numpy.ndarray]]*) → *None*

Update history after a function evaluation.

Parameters

- **x** – The parameter vector.
- **sensi_orders** – The sensitivity orders computed.
- **mode** – The objective function mode computed (function value or residuals).
- **result** – The objective function values for parameters *x*, sensitivities *sensi_orders* and mode *mode*.

class *pypesto.objective.HistoryBase*

Bases: *abc.ABC*

Abstract base class for history objects.

Can be used as a dummy history, but does not implement any history functionality.

finalize()

Finalize history. Called after a run.

get_chi2_trace(*ix*: *Optional[Union[Sequence[int], int]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[float], float]

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_fval_trace(*ix*: *Optional[Union[Sequence[int], int]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[float], float]

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_grad_trace(*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_hess_trace(*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_res_trace(*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_schi2_trace(*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_sres_trace(*ix*: *Optional[Union[int, Sequence[int]]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[Union[numpy.ndarray, np.nan]], numpy.ndarray, np.nan]

Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_time_trace(*ix*: *Optional[Union[Sequence[int], int]]* = *None*, *trim*: *bool* = *False*) →
Union[Sequence[float], float]

Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_trimmed_indices()

Get indices for a monotonically decreasing history.

```
get_x_trace (ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[numpy.ndarray], numpy.ndarray]
```

Return parameters.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

property n_fval

Return number of function evaluations.

property n_grad

Return number of gradient evaluations.

property n_hess

Return number of Hessian evaluations.

property n_res

Return number of residual evaluations.

property n_sres

Return number of residual sensitivity evaluations.

property start_time

Return start time.

```
update (x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, result: Dict[str, Union[float,
numpy.ndarray]]) → None
```

Update history after a function evaluation.

Parameters

- **x** – The parameter vector.
- **sensi_orders** – The sensitivity orders computed.
- **mode** – The objective function mode computed (function value or residuals).
- **result** – The objective function values for parameters *x*, sensitivities *sensi_orders* and mode *mode*.

```
class pypesto.objective.HistoryOptions (trace_record: bool = False, trace_record_grad:
    bool = True, trace_record_hess: bool = True,
    trace_record_res: bool = True, trace_record_sres:
    bool = True, trace_record_chi2: bool = True,
    trace_record_schi2: bool = True, trace_save_iter:
    int = 10, storage_file: Optional[str] = None)
```

Bases: *dict*

Options for the objective that are used in optimization.

In addition implements a factory pattern to generate history objects.

Parameters

- **trace_record** – Flag indicating whether to record the trace of function calls. The *trace_record_** flags only become effective if *trace_record* is True.
- **trace_record_grad** – Flag indicating whether to record the gradient in the trace.
- **trace_record_hess** – Flag indicating whether to record the Hessian in the trace.
- **trace_record_res** – Flag indicating whether to record the residual in the trace.
- **trace_record_sres** – Flag indicating whether to record the residual sensitivities in the trace.

- **trace_record_chi2** – Flag indicating whether to record the chi2 in the trace.
- **trace_record_schi2** – Flag indicating whether to record the chi2 sensitivities in the trace.
- **trace_save_iter** – After how many iterations to store the trace.
- **storage_file** – File to save the history to. Can be any of None, a “{filename}.csv”, or a “{filename}.hdf5” file. Depending on the values, the *create_history* method creates the appropriate object. Occurrences of “{id}” in the file name are replaced by the *id* upon creation of a history, if applicable.

__init__ (*trace_record*: *bool* = *False*, *trace_record_grad*: *bool* = *True*, *trace_record_hess*: *bool* = *True*, *trace_record_res*: *bool* = *True*, *trace_record_sres*: *bool* = *True*, *trace_record_chi2*: *bool* = *True*, *trace_record_schi2*: *bool* = *True*, *trace_save_iter*: *int* = 10, *storage_file*: *Optional[str]* = *None*)

Initialize self. See help(type(self)) for accurate signature.

static assert_instance (*maybe_options*: Union[pypesto.objective.history.HistoryOptions, Dict]) → pypesto.objective.history.HistoryOptions

Return a valid options object.

Parameters *maybe_options* (HistoryOptions or dict) –

create_history (*id*: *str*, *x_names*: Sequence[*str*]) → pypesto.objective.history.History

Create a *History* object; Factory method.

Parameters

- **id** – Identifier for the history.
- **x_names** – Parameter names.

class pypesto.objective.MemoryHistory (*options*: *Optional[Union[pypesto.objective.history.HistoryOptions, Dict]]* = *None*)

Bases: pypesto.objective.history.History

Class for optimization history stored in memory.

Track number of function evaluations and keeps an in-memory trace of function evaluations.

Parameters *options* – History options.

__init__ (*options*: *Optional[Union[pypesto.objective.history.HistoryOptions, Dict]]* = *None*)

Initialize self. See help(type(self)) for accurate signature.

get_chi2_trace (*ix*: *Optional[Union[Sequence[int], int]]* = *None*, *trim*: *bool* = *False*) → Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]

Chi2 values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

get_fval_trace (*ix*: *Optional[Union[Sequence[int], int]]* = *None*, *trim*: *bool* = *False*) → Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]

Return function values.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_grad_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
          np.nan]
```

Return gradients.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_hess_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
          np.nan]
```

Return hessians.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_res_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
          np.nan]
```

Residuals.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_schi2_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
          np.nan]
```

Chi2 sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_sres_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
          np.nan]
```

Residual sensitivities.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_time_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray,
          np.nan]
```

Cumulative execution times.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
get_x_trace(ix: Optional[Union[Sequence[int], int]] = None, trim: bool = False) →
    Union[Sequence[Union[float, numpy.ndarray, np.nan]], float, numpy.ndarray, np.nan]
```

Return parameters.

Takes as parameter an index or indices and returns corresponding trace values. If only a single value is requested, the list is flattened.

```
update(x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, result: Dict[str, Union[float,
numpy.ndarray]]) → None
```

See History docstring.

```
class pypesto.objective.NegLogParameterPriors(prior_list: List[Dict], x_names: Op-
tional[Sequence[str]] = None)
```

Bases: *pypesto.objective.base.ObjectiveBase*

Implements Negative Log Priors on Parameters.

Contains a list of prior dictionaries for the individual parameters of the format

```
{‘index’: [int], ‘density_fun’: [Callable], ‘density_dx’: [Callable], ‘density_ddx’: [Callable]}
```

A prior instance can be added to e.g. an objective, that gives the likelihood, by an AggregatedObjective.

Notes

All callables should correspond to log-densities. That is, they return log-densities and their corresponding derivatives. Internally, values are multiplied by -1, since pyPESTO expects the Objective function to be of a negative log-density type.

`__init__(prior_list: List[Dict], x_names: Optional[Sequence[str]] = None)`
Initialize.

Parameters

- **prior_list** – List of dicts containing the individual parameter priors. Format see above.
- **x_names** – Sequence of parameter names (optional).

`call_unprocessed(x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str) → Dict[str, Union[float, numpy.ndarray, Dict]]`
Call objective function without pre- or post-processing and formatting.

Returns A dict containing the results.

Return type result

`check_mode(mode) → bool`
See *ObjectiveBase* documentation.

`check_sensi_orders(sensi_orders: Tuple[int, ...], mode: str) → bool`
See *ObjectiveBase* documentation.

`gradient_neg_log_density(x)`
Evaluate the gradient of the negative log-density at x.

`hessian_neg_log_density(x)`
Evaluate the hessian of the negative log-density at x.

`hessian_vp_neg_log_density(x, p)`
Compute vector product of the hessian at x with a vector p.

`neg_log_density(x)`
Evaluate the negative log-density at x.

`residual(x)`
Evaluate the residual representation of the prior at x.

`residual_jacobian(x)`
Evaluate residual Jacobian.

Evaluate the Jacobian of the residual representation of the prior for a parameter vector x w.r.t. x, if available.

`class pypesto.objective.NegLogPriors(objectives: Sequence[pypesto.objective.base.ObjectiveBase], x_names: Optional[Sequence[str]] = None)`
Bases: `pypesto.objective.aggregated.AggregatedObjective`

Aggregates different forms of negative log-prior distributions.

Allows to distinguish priors from the likelihood by testing the type of an objective.

Consists basically of a list of individual negative log-priors, given in self.objectives.

```
class pypesto.objective.Objective(fun: Optional[Callable] = None, grad: Optional[Union[Callable, bool]] = None, hess: Optional[Callable] = None, hessp: Optional[Callable] = None, res: Optional[Callable] = None, sres: Optional[Union[Callable, bool]] = None, x_names: Optional[Sequence[str]] = None)
```

Bases: pypesto.objective.base.ObjectiveBase

Objective class.

The objective class allows the user explicitly specify functions that compute the function value and/or residuals as well as respective derivatives.

Denote dimensions $n = \text{parameters}$, $m = \text{residuals}$.

Parameters

- **fun** – The objective function to be minimized. If it only computes the objective function value, it should be of the form

```
fun(x) -> float
```

where x is an 1-D array with shape (n,), and n is the parameter space dimension.

- **grad** – Method for computing the gradient vector. If it is a callable, it should be of the form

```
grad(x) -> array_like, shape (n,).
```

If its value is True, then fun should return the gradient as a second output.

- **hess** – Method for computing the Hessian matrix. If it is a callable, it should be of the form

```
hess(x) -> array, shape (n, n).
```

If its value is True, then fun should return the gradient as a second, and the Hessian as a third output, and grad should be True as well.

- **hessp** – Method for computing the Hessian vector product, i.e.

```
hessp(x, v) -> array_like, shape (n,)
```

computes the product H^*v of the Hessian of fun at x with v.

- **res** – Method for computing residuals, i.e.

```
res(x) -> array_like, shape (m,).
```

- **sres** – Method for computing residual sensitivities. If it is a callable, it should be of the form

```
sres(x) -> array, shape (m, n).
```

If its value is True, then res should return the residual sensitivities as a second output.

- **x_names** – Parameter names. None if no names provided, otherwise a list of str, length dim_full (as in the Problem class). Can be read by the problem.

```
__init__(fun: Optional[Callable] = None, grad: Optional[Union[Callable, bool]] = None, hess: Optional[Callable] = None, hessp: Optional[Callable] = None, res: Optional[Callable] = None, sres: Optional[Union[Callable, bool]] = None, x_names: Optional[Sequence[str]] = None)
```

Initialize self. See help(type(self)) for accurate signature.

```
call_unprocessed(x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, **kwargs) →
    Dict[str, Union[float, numpy.ndarray, Dict]]
```

Call objective function without pre- or post-processing and formatting.

Returns A dict containing the results.

Return type result

```
get_config() → dict
```

Return basic information of the objective configuration.

```
property has_fun
```

Check whether function is defined.

```
property has_grad
```

Check whether gradient is defined.

```
property has_hess
```

Check whether Hessian is defined.

```
property has_hessp
```

```
property has_res
```

Check whether residuals are defined.

```
property has_sres
```

Check whether residual sensitivities are defined.

```
class pypesto.objective.ObjectiveBase(x_names: Optional[Sequence[str]] = None)
```

Bases: abc.ABC

Abstract objective class.

The objective class is a simple wrapper around the objective function, giving a standardized way of calling. Apart from that, it manages several things including fixing of parameters and history.

The objective function is assumed to be in the format of a cost function, log-likelihood function, or log-posterior function. These functions are subject to minimization. For profiling and sampling, the sign is internally flipped, all returned and stored values are however given as returned by this objective function. If maximization is to be performed, the sign should be flipped before creating the objective function.

Parameters `x_names` – Parameter names that can be optionally used in, e.g., history or gradient checks.

```
history
```

For storing the call history. Initialized by the methods, e.g. the optimizer, in `initialize_history()`.

```
pre_post_processor
```

Preprocess input values to and postprocess output values from `__call__`. Configured in `update_from_problem()`.

```
__call__(x: numpy.ndarray, sensi_orders: Tuple[int, ...] = (0), mode: str = 'mode_fun', return_dict:
    bool = False, **kwargs) → Union[float, numpy.ndarray, Tuple, Dict[str, Union[float,
        numpy.ndarray, Dict]]]
```

Obtain arbitrary sensitivities.

This is the central method which is always called, also by the `get_*` methods.

There are different ways in which an optimizer calls the objective function, and in how the objective function provides information (e.g. derivatives via separate functions or along with the function values). The different calling modes increase efficiency in space and time and make the objective flexible.

Parameters

- `x` – The parameters for which to evaluate the objective function.

- **sensi_orders** – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- **mode** – Whether to compute function values or residuals.
- **return_dict** – If False (default), the result is a Tuple of the requested values in the requested order. Tuples of length one are flattened. If True, instead a dict is returned which can carry further information.

Returns By default, this is a tuple of the requested function values and derivatives in the requested order (if only 1 value, the tuple is flattened). If *return_dict*, then instead a dict is returned with function values and derivatives indicated by ids.

Return type result

`__init__(x_names: Optional[Sequence[str]] = None)`

Initialize self. See help(type(self)) for accurate signature.

`abstract call_unprocessed(x: numpy.ndarray, sensi_orders: Tuple[int, ...], mode: str, **kwargs) → Dict[str, Union[float, numpy.ndarray, Dict]]`

Call objective function without pre- or post-processing and formatting.

Parameters

- **x** – The parameters for which to evaluate the objective function.
- **sensi_orders** – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- **mode** – Whether to compute function values or residuals.

Returns A dict containing the results.

Return type result

`check_grad(x: numpy.ndarray, x_indices: Optional[Sequence[int]] = None, eps: float = 1e-05, verbosity: int = 1, mode: str = 'mode_fun', order: int = 0, detailed: bool = False) → pandas.core.frame.DataFrame`

Compare gradient evaluation.

Firstly approximate via finite differences, and secondly use the objective gradient.

Parameters

- **x** – The parameters for which to evaluate the gradient.
- **x_indices** – Indices for which to compute gradients. Default: all.
- **eps** – Finite differences step size.
- **verbosity** – Level of verbosity for function output. 0: no output, 1: summary for all parameters, 2: summary for individual parameters.
- **mode** – Residual (MODE_RES) or objective function value (MODE_FUN) computation mode.
- **order** – Derivative order, either gradient (0) or Hessian (1).
- **detailed** – Toggle whether additional values are returned. Additional values are function values, and the central difference weighted by the difference in output from all methods (standard deviation and mean).

Returns gradient, finite difference approximations and error estimates.

Return type result

`check_grad_multi_eps(*args, multi_eps: Optional[Iterable] = None, label: str = 'rel_err', **kwargs)`

Compare gradient evaluation.

Equivalent to the `ObjectiveBase.check_grad` method, except multiple finite difference step sizes are tested. The result contains the lowest finite difference for each parameter, and the corresponding finite difference step size.

Parameters

- `ObjectiveBase.check_grad` method parameters. (All) –
- `multi_eps` – The finite difference step sizes to be tested.
- `label` – The label of the column that will be minimized for each parameter. Valid options are the column labels of the dataframe returned by the `ObjectiveBase.check_grad` method.

`check_gradients_match_finite_differences (*args, x: Optional[numpy.ndarray] = None, x_free: Optional[Sequence[int]] = None, rtol: float = 0.01, atol: float = 0.001, mode: Optional[str] = None, order: int = 0, multi_eps=None, **kwargs) → bool`

Check if gradients match finite differences (FDs).

Parameters

- `rtol` (*relative error tolerance*) –
- `x` (*The parameters for which to evaluate the gradient*) –
- `x_free` (*Indices for which to compute gradients*) –
- `rtol` –
- `atol` (*absolute error tolerance*) –
- `mode` (*function values or residuals*) –
- `order` (*gradient order, 0 for gradient, 1 for hessian*) –
- `multi_eps` (*multiple test step width for FDs*) –

Returns Indicates whether gradients match (True) FDs or not (False)

Return type `bool`

`check_mode (mode: str) → bool`

Check if the objective is able to compute in the requested mode.

Either `check_mode` or the `fun_...` functions must be overwritten in derived classes.

Parameters `mode` – Whether to compute function values or residuals.

Returns Boolean indicating whether mode is supported

Return type flag

`check_sensi_orders (sensi_orders: Tuple[int, ...], mode: str) → bool`

Check if the objective is able to compute the requested sensitivities.

Either `check_sensi_orders` or the `fun_...` functions must be overwritten in derived classes.

Parameters

- `sensi_orders` – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- `mode` – Whether to compute function values or residuals.

Returns Boolean indicating whether combination of sensi_orders and mode is supported

Return type flag

get_config() → dict
Get the configuration information of the objective function.
Return it as a dictionary.

get_fval(*x*: *numpy.ndarray*) → float
Get the function value at *x*.

get_grad(*x*: *numpy.ndarray*) → *numpy.ndarray*
Get the gradient at *x*.

get_hess(*x*: *numpy.ndarray*) → *numpy.ndarray*
Get the Hessian at *x*.

get_res(*x*: *numpy.ndarray*) → *numpy.ndarray*
Get the residuals at *x*.

get_sres(*x*: *numpy.ndarray*) → *numpy.ndarray*
Get the residual sensitivities at *x*.

property has_fun
Check whether function is defined.

property has_grad
Check whether gradient is defined.

property has_hess
Check whether Hessian is defined.

property has_hessp

property has_res
Check whether residuals are defined.

property has_sres
Check whether residual sensitivities are defined.

initialize()
Initialize the objective function.
This function is used at the beginning of an analysis, e.g. optimization, and can e.g. reset the objective memory. By default does nothing.

static output_to_tuple(*sensi_orders*: *Tuple[int, ...]*, *mode*: *str*, ***kwargs*: *Union[float, numpy.ndarray]*) → *Tuple*
Return values as requested by the caller.
Usually only a subset of outputs is demanded. One output is returned as-is, more than one output are returned as a tuple in order (fval, grad, hess).

update_from_problem(*dim_full*: *int*, *x_free_indices*: *Sequence[int]*, *x_fixed_indices*: *Sequence[int]*, *x_fixed_vals*: *Sequence[float]*)
Handle fixed parameters.
Later, the objective will be given parameter vectors *x* of dimension *dim*, which have to be filled up with fixed parameter values to form a vector of dimension *dim_full* \geq *dim*. This vector is then used to compute function value and derivatives. The derivatives must later be reduced again to dimension *dim*.
This is so as to make the fixing of parameters transparent to the caller.
The methods preprocess, postprocess are overwritten for the above functionality, respectively.

Parameters

- **dim_full** – Dimension of the full vector including fixed parameters.

- **x_free_indices** – Vector containing the indices (zero-based) of free parameters (complimentary to x_fixed_indices).
- **x_fixed_indices** – Vector containing the indices (zero-based) of parameter components that are not to be optimized.
- **x_fixed_vals** – Vector of the same length as x_fixed_indices, containing the values of the fixed parameters.

property x_names

Parameter names.

class pypesto.objective.OptimizerHistory(*history*: pypesto.objective.history.History, *x0*: *numpy.ndarray*, *generate_from_history*: *bool* = *False*)

Bases: *object*

Objective call history.

Container around a History object, which keeps track of optimal values.

fval0, fval_min

Initial and best function value found.

chi20, chi2_min

Initial and best chi2 value found.

x0, x_min

Initial and best parameters found.

grad_min

gradient for best parameters

hess_min

hessian (approximation) for best parameters

res_min

residuals for best parameters

sres_min

residual sensitivities for best parameters

Parameters

- **history** – History object to attach to this container. This history object implements the storage of the actual history.
- **x0** – Initial values for optimization
- **generate_from_history** – If set to true, this function will try to fill attributes of this function based on the provided history

__init__(*history*: pypesto.objective.history.History, *x0*: *numpy.ndarray*, *generate_from_history*: *bool* = *False*) → *None*

Initialize self. See help(type(self)) for accurate signature.

extract_from_history(*var*, *ix*)

Get value of *var* at iteration *ix*.

finalize()

Finalize history.

update (*x*: `numpy.ndarray`, *sensi_orders*: `Tuple[int]`, *mode*: `str`, *result*: `Dict[str, Union[float, numpy.ndarray]]`) → `None`
Update history and best found value.

`pypesto.objective.res_to_chi2(*args, **kwargs)`

`pypesto.objective.sres_to_schi2(*args, **kwargs)`

4.3 Problem

A problem contains the objective as well as all information like prior describing the problem to be solved.

class `pypesto.problem.NegLogPriors` (*objectives*: `Sequence[pypesto.objective.base.ObjectiveBase]`,

x_names: `Optional[Sequence[str]] = None`)

Bases: `pypesto.objective.aggregated.AggregatedObjective`

Aggregates different forms of negative log-prior distributions.

Allows to distinguish priors from the likelihood by testing the type of an objective.

Consists basically of a list of individual negative log-priors, given in self.objectives.

class `pypesto.problem.ObjectiveBase` (*x_names*: `Optional[Sequence[str]] = None`)

Bases: `abc.ABC`

Abstract objective class.

The objective class is a simple wrapper around the objective function, giving a standardized way of calling. Apart from that, it manages several things including fixing of parameters and history.

The objective function is assumed to be in the format of a cost function, log-likelihood function, or log-posterior function. These functions are subject to minimization. For profiling and sampling, the sign is internally flipped, all returned and stored values are however given as returned by this objective function. If maximization is to be performed, the sign should be flipped before creating the objective function.

Parameters `x_names` – Parameter names that can be optionally used in, e.g., history or gradient checks.

history

For storing the call history. Initialized by the methods, e.g. the optimizer, in `initialize_history()`.

pre_post_processor

Preprocess input values to and postprocess output values from `__call__`. Configured in `update_from_problem()`.

`__call__` (*x*: `numpy.ndarray`, *sensi_orders*: `Tuple[int, ...] = (0)`, *mode*: `str = 'mode_fun'`, *return_dict*: `bool = False`, ***kwargs*) → `Union[float, numpy.ndarray, Tuple, Dict[str, Union[float, numpy.ndarray, Dict]]]`

Obtain arbitrary sensitivities.

This is the central method which is always called, also by the `get_*` methods.

There are different ways in which an optimizer calls the objective function, and in how the objective function provides information (e.g. derivatives via separate functions or along with the function values). The different calling modes increase efficiency in space and time and make the objective flexible.

Parameters

- `x` – The parameters for which to evaluate the objective function.
- `sensi_orders` – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- `mode` – Whether to compute function values or residuals.

- **return_dict** – If False (default), the result is a Tuple of the requested values in the requested order. Tuples of length one are flattened. If True, instead a dict is returned which can carry further information.

Returns By default, this is a tuple of the requested function values and derivatives in the requested order (if only 1 value, the tuple is flattened). If *return_dict*, then instead a dict is returned with function values and derivatives indicated by ids.

Return type result

__init__ (*x_names*: *Optional[Sequence[str]]* = None)
Initialize self. See help(type(self)) for accurate signature.

abstract call_unprocessed (*x*: *numpy.ndarray*, *sensi_orders*: *Tuple[int, ...]*, *mode*: *str*,
***kwargs*) → Dict[str, Union[float, numpy.ndarray, Dict]]
Call objective function without pre- or post-processing and formatting.

Parameters

- **x** – The parameters for which to evaluate the objective function.
- **sensi_orders** – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- **mode** – Whether to compute function values or residuals.

Returns A dict containing the results.

Return type result

check_grad (*x*: *numpy.ndarray*, *x_indices*: *Optional[Sequence[int]]* = None, *eps*: *float* = 1e-05, *verbosity*: *int* = 1, *mode*: *str* = 'mode_fun', *order*: *int* = 0, *detailed*: *bool* = False) → pandas.core.frame.DataFrame
Compare gradient evaluation.

Firstly approximate via finite differences, and secondly use the objective gradient.

Parameters

- **x** – The parameters for which to evaluate the gradient.
- **x_indices** – Indices for which to compute gradients. Default: all.
- **eps** – Finite differences step size.
- **verbosity** – Level of verbosity for function output. 0: no output, 1: summary for all parameters, 2: summary for individual parameters.
- **mode** – Residual (MODE_RES) or objective function value (MODE_FUN) computation mode.
- **order** – Derivative order, either gradient (0) or Hessian (1).
- **detailed** – Toggle whether additional values are returned. Additional values are function values, and the central difference weighted by the difference in output from all methods (standard deviation and mean).

Returns gradient, finite difference approximations and error estimates.

Return type result

check_grad_multi_eps (**args*, *multi_eps*: *Optional[Iterable]* = None, *label*: *str* = 'rel_err',
***kwargs*)
Compare gradient evaluation.

Equivalent to the `ObjectiveBase.check_grad` method, except multiple finite difference step sizes are tested. The result contains the lowest finite difference for each parameter, and the corresponding finite difference step size.

Parameters

- `ObjectiveBase.check_grad` method parameters. (All) –
- `multi_eps` – The finite difference step sizes to be tested.
- `label` – The label of the column that will be minimized for each parameter. Valid options are the column labels of the dataframe returned by the `ObjectiveBase.check_grad` method.

`check_gradients_match_finite_differences (*args, x: Optional[numpy.ndarray] = None, x_free: Optional[Sequence[int]] = None, rtol: float = 0.01, atol: float = 0.001, mode: Optional[str] = None, order: int = 0, multi_eps=None, **kwargs) → bool`

Check if gradients match finite differences (FDs).

Parameters

- `rtol` (*relative error tolerance*) –
- `x` (*The parameters for which to evaluate the gradient*) –
- `x_free` (*Indices for which to compute gradients*) –
- `rtol` –
- `atol` (*absolute error tolerance*) –
- `mode` (*function values or residuals*) –
- `order` (*gradient order, 0 for gradient, 1 for hessian*) –
- `multi_eps` (*multiple test step width for FDs*) –

Returns Indicates whether gradients match (True) FDs or not (False)

Return type `bool`

`check_mode (mode: str) → bool`

Check if the objective is able to compute in the requested mode.

Either `check_mode` or the `fun_...` functions must be overwritten in derived classes.

Parameters `mode` – Whether to compute function values or residuals.

Returns Boolean indicating whether mode is supported

Return type flag

`check_sensi_orders (sensi_orders: Tuple[int, ...], mode: str) → bool`

Check if the objective is able to compute the requested sensitivities.

Either `check_sensi_orders` or the `fun_...` functions must be overwritten in derived classes.

Parameters

- `sensi_orders` – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- `mode` – Whether to compute function values or residuals.

Returns Boolean indicating whether combination of sensi_orders and mode is supported

Return type flag

get_config() → dict

Get the configuration information of the objective function.

Return it as a dictionary.

get_fval(*x*: *numpy.ndarray*) → float

Get the function value at *x*.

get_grad(*x*: *numpy.ndarray*) → *numpy.ndarray*

Get the gradient at *x*.

get_hess(*x*: *numpy.ndarray*) → *numpy.ndarray*

Get the Hessian at *x*.

get_res(*x*: *numpy.ndarray*) → *numpy.ndarray*

Get the residuals at *x*.

get_sres(*x*: *numpy.ndarray*) → *numpy.ndarray*

Get the residual sensitivities at *x*.

property has_fun

Check whether function is defined.

property has_grad

Check whether gradient is defined.

property has_hess

Check whether Hessian is defined.

property has_hessp**property has_res**

Check whether residuals are defined.

property has_sres

Check whether residual sensitivities are defined.

initialize()

Initialize the objective function.

This function is used at the beginning of an analysis, e.g. optimization, and can e.g. reset the objective memory. By default does nothing.

static output_to_tuple(*sensi_orders*: *Tuple[int, ...]*, *mode*: *str*, ***kwargs*: *Union[float, numpy.ndarray]*) → *Tuple*

Return values as requested by the caller.

Usually only a subset of outputs is demanded. One output is returned as-is, more than one output are returned as a tuple in order (fval, grad, hess).

update_from_problem(*dim_full*: *int*, *x_free_indices*: *Sequence[int]*, *x_fixed_indices*: *Sequence[int]*, *x_fixed_vals*: *Sequence[float]*)

Handle fixed parameters.

Later, the objective will be given parameter vectors *x* of dimension *dim*, which have to be filled up with fixed parameter values to form a vector of dimension *dim_full* \geq *dim*. This vector is then used to compute function value and derivatives. The derivatives must later be reduced again to dimension *dim*.

This is so as to make the fixing of parameters transparent to the caller.

The methods preprocess, postprocess are overwritten for the above functionality, respectively.

Parameters

- **dim_full** – Dimension of the full vector including fixed parameters.

- **x_free_indices** – Vector containing the indices (zero-based) of free parameters (complimentary to x_fixed_indices).
- **x_fixed_indices** – Vector containing the indices (zero-based) of parameter components that are not to be optimized.
- **x_fixed_vals** – Vector of the same length as x_fixed_indices, containing the values of the fixed parameters.

property x_names

Parameter names.

```
class pypesto.problem.Problem(objective:          pypesto.objective.base.ObjectiveBase,
                               lb:                Union[numumpy.ndarray, List[float]], ub:    Union[numumpy.ndarray,
                               List[float]], dim_full: Optional[int] = None, x_fixed_indices:
                               Optional[Union[Iterable[SupportsInt], SupportsInt]] = None,
                               x_fixed_vals:   Optional[Union[Iterable[SupportsFloat], Sup-
                               portsFloat]] = None, x_guesses:   Optional[Iterable[float]] =
                               None, startpoint_method: Optional[Callable] = None,
                               x_names:        Optional[Iterable[str]] = None, x_scales:
                               Optional[Iterable[str]] = None, x_priors_defs:   Op-
                               tional[pypesto.objective.priors.NegLogPriors] = None,
                               lb_init:        Optional[Union[numumpy.ndarray, List[float]]] = None,
                               ub_init:        Optional[Union[numumpy.ndarray, List[float]]] = None,
                               copy_objective: bool = True)
```

Bases: object

The problem formulation.

A problem specifies the objective function, boundaries and constraints, parameter guesses as well as the parameters which are to be optimized.

Parameters

- **objective** – The objective function for minimization. Note that a shallow copy is created.
- **lb** – The lower and upper bounds for optimization. For unbounded directions set to +inf.
- **ub** – The lower and upper bounds for optimization. For unbounded directions set to +inf.
- **lb_init** – The lower and upper bounds for initialization, typically for defining search start points. If not set, set to lb, ub.
- **ub_init** – The lower and upper bounds for initialization, typically for defining search start points. If not set, set to lb, ub.
- **dim_full** – The full dimension of the problem, including fixed parameters.
- **x_fixed_indices** – Vector containing the indices (zero-based) of parameter components that are not to be optimized.
- **x_fixed_vals** – Vector of the same length as x_fixed_indices, containing the values of the fixed parameters.
- **x_guesses** – Guesses for the parameter values, shape (g, dim), where g denotes the number of guesses. These are used as start points in the optimization.
- **startpoint_method** – Callable. `startpoint_method(n_starts)` returns a n_starts x n_free_indices array of initial values for the optimization.
- **x_names** – Parameter names that can be optionally used e.g. in visualizations. If objective.get_x_names() is not None, those values are used, else the values specified here are used

if not None, otherwise the variable names are set to [x_0 , ..., $x_{\text{dim_full}}$]. The list must always be of length `dim_full`.

- **`x_scales`** – Parameter scales can be optionally given and are used e.g. in visualisation and prior generation. Currently the scales ‘lin’, ‘log’ and ‘log10’ are supported.
- **`x_priors_defs`** – Definitions of priors for parameters. Types of priors, and their required and optional parameters, are described in the *Prior* class.
- **`copy_objective`** – Whether to generate a deep copy of the objective function before potential modification the problem class performs on it.

Notes

On the fixing of parameter values:

The number of parameters `dim_full` the objective takes as input must be known, so it must be either `lb` a vector of that size, or `dim_full` specified as a parameter.

All vectors are mapped to the reduced space of dimension `dim` in `__init__`, regardless of whether they were in dimension `dim` or `dim_full` before. If the full representation is needed, the methods `get_full_vector()` and `get_full_matrix()` can be used.

```
__init__(objective: pypesto.objective.base.ObjectiveBase, lb: Union[numumpy.ndarray, List[float]], ub:
        Union[numumpy.ndarray, List[float]], dim_full: Optional[int] = None, x_fixed_indices:
        Optional[Union[Iterable[SupportsInt], SupportsInt]] = None, x_fixed_vals: Optional[Union[Iterable[SupportsFloat], SupportsFloat]] = None, x_guesses: Optional[Iterable[float]] = None, startpoint_method: Optional[Callable] = None,
        x_names: Optional[Iterable[str]] = None, x_scales: Optional[Iterable[str]] = None, x_priors_defs: Optional[pypesto.objective.priors.NegLogPriors] = None,
        lb_init: Optional[Union[numumpy.ndarray, List[float]]] = None, ub_init: Optional[Union[numumpy.ndarray, List[float]]] = None, copy_objective: bool = True)
```

Initialize self. See help(type(self)) for accurate signature.

`property dim`

Return dimension only considering non fixed parameters.

```
fix_parameters(parameter_indices: Union[Iterable[SupportsInt], SupportsInt], parameter_vals:
                Union[Iterable[SupportsFloat], SupportsFloat]) → None
```

Fix specified parameters to specified values.

`full_index_to_free_index(full_index: int)`

Calculate index in reduced vector from index in full vector.

Parameters `full_index` (The index in the full vector.) –

Returns `free_index`

Return type The index in the free vector.

`get_full_matrix(x: Optional[numumpy.ndarray]) → Optional[numumpy.ndarray]`

Map matrix from `dim` to `dim_full`. Usually used for hessian.

Parameters `x` (`array_like`, `shape=(dim, dim)`) – The matrix in dimension `dim`.

```
get_full_vector(x: Optional[numumpy.ndarray], x_fixed_vals: Optional[Iterable[float]] = None) →
    Optional[numumpy.ndarray]
```

Map vector from `dim` to `dim_full`. Usually used for `x, grad`.

Parameters

- `x` (`array_like`, `shape=(dim,)`) – The vector in dimension `dim`.

- **x_fixed_vals** (*array_like*, *ndim=1*, *optional*) – The values to be used for the fixed indices. If None, then nans are inserted. Usually, None will be used for grad and problem.x_fixed_vals for x.

get_reduced_matrix (*x_full*: *Optional[numumpy.ndarray]*) → *Optional[numumpy.ndarray]*
Map matrix from dim_full to dim, i.e. delete fixed indices.

Parameters **x_full** (*array_like*, *ndim=2*) – The matrix in dimension dim_full.

get_reduced_vector (*x_full*: *Optional[numumpy.ndarray]*, *x_indices*: *Optional[List[int]] = None*) → *Optional[numumpy.ndarray]*
Keep only those elements, which indices are specified in x_indices.

If x_indices is not provided, delete fixed indices.

Parameters

- **x_full** (*array_like*, *ndim=1*) – The vector in dimension dim_full.
- **x_indices** – indices of x_full that should remain

property lb

Return lower bounds of free parameters.

property lb_init

Return initial lower bounds of free parameters.

normalize() → *None*

Process vectors.

Reduce all vectors to dimension dim and have the objective accept vectors of dimension dim.

print_parameter_summary() → *None*

Print a summary of parameters.

Include what parameters are being optimized and parameter boundaries.

set_x_guesses (*x_guesses*: *Iterable[float]*)

Set the x_guesses of a problem.

Parameters x_guesses –

property ub

Return upper bounds of free parameters.

property ub_init

Return initial upper bounds of free parameters.

unfix_parameters (*parameter_indices*: *Union[Iterable[SupportsInt], SupportsInt]*) → *None*

Free specified parameters.

property x_free_indices

Return non fixed parameters.

property x_guesses

Return guesses of the free parameter values.

class *pypesto.problem.SupportsFloat* (**args*, ***kwargs*)
Bases: Protocol

An ABC with one abstract method __float__.

__init__ (**args*, ***kwargs*)

Initialize self. See help(type(self)) for accurate signature.

```
class pypesto.problem.SupportsInt (*args, **kwargs)
Bases: Protocol

An ABC with one abstract method __int__.

__init__ (*args, **kwargs)
    Initialize self. See help(type(self)) for accurate signature.
```

4.4 Prediction

Generate predictions from simulations with specified parameter vectors, with optional post-processing.

```
class pypesto.predict.AmiciPredictor(amici_objective: pypesto.objective.amici.AmiciObjective,
                                      amici_output_fields: Optional[Sequence[str]] = None,
                                      post_processor: Optional[Callable] = None,
                                      post_processor_sensi: Optional[Callable] = None,
                                      post_processor_time: Optional[Callable] = None,
                                      max_chunk_size: Optional[int] = None, output_ids:
                                      Optional[Sequence[str]] = None, condition_ids:
                                      Optional[Sequence[str]] = None)

Bases: object
```

Do forward simulations/predictions for an AMICI model.

The user may supply post-processing methods. If post-processing methods are supplied, and a gradient of the prediction is requested, then the sensitivities of the AMICI model must also be post-processed. There are no checks here to ensure that the sensitivities are correctly post-processed, this is explicitly left to the user. There are also no safeguards if the postprocessor routines fail. This may happen if, e.g., a call to Amici fails, and no timepoints, states or observables are returned. As the AmiciPredictor is agnostic about the dimension of the postprocessor and also the dimension of the postprocessed output, these checks are also left to the user. An example for such a check is provided in the default output (see `_default_output()`).

```
__call__ (x: numpy.ndarray, sensi_orders: Tuple[int, ...] = (0), mode: str = 'mode_fun', output_file:
          str = "", output_format: str = 'csv', include_llh_weights: bool = False, include_sigmay: bool
          = False) → pypesto.predict.result.PredictionResult
```

Call the predictor.

Simulate a model for a certain prediction function. This method relies on the AmiciObjective, which is underlying, but allows the user to apply any post-processing of the results, the sensitivities, and the timepoints.

Parameters

- **x** – The parameters for which to evaluate the prediction function.
- **sensi_orders** – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.
- **mode** – Whether to compute function values or residuals.
- **output_file** – Path to an output file.
- **output_format** – Either ‘csv’, ‘h5’. If an output file is specified, this routine will return a csv file, created from a DataFrame, or an h5 file, created from a dict.
- **include_llh_weights** – Boolean whether weights should be included in the prediction. Necessary for weighted means of Ensembles.
- **include_sigmay** – Boolean whether standard deviations should be included in the prediction output. Necessary for evaluation of weighted means of Ensembles.

Returns PredictionResult object containing timepoints, outputs, and output_sensitivities if requested

Return type results

```
__init__(amici_objective: pypesto.objective.amici.AmiciObjective, amici_output_fields: Optional[Sequence[str]] = None, post_processor: Optional[Callable] = None, post_processor_sensi: Optional[Callable] = None, post_processor_time: Optional[Callable] = None, max_chunk_size: Optional[int] = None, output_ids: Optional[Sequence[str]] = None, condition_ids: Optional[Sequence[str]] = None)
```

Initialize predictor.

Parameters

- **amici_objective** – An objective object, which will be used to get model simulations
- **amici_output_fields** – keys that exist in the return data object from AMICI, which should be available for the post-processors
- **post_processor** – A callable function which applies postprocessing to the simulation results and possibly defines different outputs than those of the amici model. Default are the observables (`pypesto.predict.constants.AMICI_Y`) of the AMICI model. This method takes a list of dicts (with the returned fields `pypesto.predict.constants.AMICI_T`, `pypesto.predict.constants.AMICI_X`, and `pypesto.predict.constants.AMICI_Y` of the AMICI ReturnData objects) as input. Safeguards for, e.g., failure of AMICI are left to the user.
- **post_processor_sensi** – A callable function which applies postprocessing to the sensitivities of the simulation results. Defaults to the observable sensitivities of the AMICI model. This method takes a list of dicts (with the returned fields `pypesto.predict.constants.AMICI_T`, `pypesto.predict.constants.AMICI_X`, `pypesto.predict.constants.AMICI_Y`, `pypesto.predict.constants.AMICI_SX`, and `pypesto.predict.constants.AMICI_SY` of the AMICI ReturnData objects) as input. Safeguards for, e.g., failure of AMICI are left to the user.
- **post_processor_time** – A callable function which applies postprocessing to the timepoints of the simulations. Defaults to the timepoints of the amici model. This method takes a list of dicts (with the returned field `pypesto.predict.constants.AMICI_T` of the amici ReturnData objects) as input. Safeguards for, e.g., failure of AMICI are left to the user.
- **max_chunk_size** – In some cases, we don't want to compute all predictions at once when calling the prediction function, as this might not fit into the memory for large datasets and models. Here, the user can specify a maximum chunk size of conditions, which should be simulated at a time. Defaults to None, meaning that all conditions will be simulated.
- **output_ids** – IDs of outputs, as post-processing allows the creation of customizable outputs, which may not coincide with those from the AMICI model (defaults to AMICI observables).
- **condition_ids** – List of identifiers for the conditions of the edata objects of the amici objective, will be passed to the PredictionResult at call.

```
class pypesto.predict.PredictionConditionResult (timepoints: numpy.ndarray, output_ids: Sequence[str], output: Optional[numpy.ndarray] = None, output_sensi: Optional[numpy.ndarray] = None, output_weight: Optional[float] = None, output_sigmay: Optional[numpy.ndarray] = None, x_names: Optional[Sequence[str]] = None)
```

Bases: object

Light-weight wrapper for the prediction of one simulation condition.

It should provide a common api how amici predictions should look like in pyPESTO.

```
__init__ (timepoints: numpy.ndarray, output_ids: Sequence[str], output: Optional[numpy.ndarray] = None, output_sensi: Optional[numpy.ndarray] = None, output_weight: Optional[float] = None, output_sigmay: Optional[numpy.ndarray] = None, x_names: Optional[Sequence[str]] = None)
```

Initialize PredictionConditionResult.

Parameters

- **timepoints** – Output timepoints for this simulation condition
- **output_ids** – IDs of outputs for this simulation condition
- **output** – Postprocessed outputs (ndarray)
- **output_sensi** – Sensitivities of postprocessed outputs (ndarray)
- **output_weight** – LLH of the simulation
- **output_sigmay** – Standard deviations of postprocessed observables
- **x_names** – IDs of model parameter w.r.t to which sensitivities were computed

```
class pypesto.predict.PredictionResult (conditions: Sequence[Union[pypesto.predict.result.PredictionConditionResult, Dict]], condition_ids: Optional[Sequence[str]] = None, comment: Optional[str] = None)
```

Bases: object

Light-weight wrapper around prediction from pyPESTO made by an AMICI model.

Its only purpose is to have fixed format/api, how prediction results should be stored, read, and handled: as predictions are a very flexible format anyway, they should at least have a common definition, which allows to work with them in a reasonable way.

```
__init__ (conditions: Sequence[Union[pypesto.predict.result.PredictionConditionResult, Dict]], condition_ids: Optional[Sequence[str]] = None, comment: Optional[str] = None)
```

Initialize PredictionResult.

Parameters

- **conditions** – A list of PredictionConditionResult objects or dicts
- **condition_ids** – IDs or names of the simulation conditions, which belong to this prediction (e.g., PEtab uses tuples of preequilibration condition and simulation conditions)
- **comment** – An additional note, which can be attached to this prediction

```
write_to_csv (output_file: str)
```

Save predictions to a csv file.

Parameters **output_file** – path to file/folder to which results will be written

write_to_h5 (*output_file*: *str*, *base_path*: *Optional[str]* = *None*)

Save predictions to an h5 file.

It appends to the file if the file already exists.

Parameters

- **output_file** – path to file/folder to which results will be written
- **base_path** – base path in the h5 file

class *pypesto.predict.PredictorTask* (*predictor*: *pypesto.predict.Predictor*, *x*: *Sequence[float]*, *sensi_orders*: *Tuple[int, ...]*, *mode*: *str*, *id*: *str*)

Bases: *pypesto.engine.task.Task*

Perform a single prediction with *pypesto.engine.Task*.

Designed for use with *pypesto.ensemble.Ensemble*.

predictor

The predictor to use.

x

The parameter vector to compute predictions with.

sensi_orders

Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad.

mode

Whether to compute function values or residuals.

id

The input ID.

__init__ (*predictor*: *pypesto.predict.Predictor*, *x*: *Sequence[float]*, *sensi_orders*: *Tuple[int, ...]*, *mode*: *str*, *id*: *str*)

Initialize self. See help(type(self)) for accurate signature.

execute () → *pypesto.predict.PredictionResult*

Execute and return the prediction.

4.5 PEtab

pyPESTO support for the PEtab data format.

class *pypesto.petab.PetabImporter* (*petab_problem*: *petab.Problem*, *output_folder*: *str* = *None*, *model_name*: *str* = *None*, *validate_petab*: *bool* = *True*)

Bases: *pypesto.objective.amici.AmiciObjectBuilder*

Importer for Petab files.

Create an *amici.Model*, an *objective.AmiciObjective* or a *pypesto.Problem* from Petab files.

MODEL_BASE_DIR = 'amici_models'

__init__ (*petab_problem*: *petab.Problem*, *output_folder*: *str* = *None*, *model_name*: *str* = *None*, *validate_petab*: *bool* = *True*)

Initialize importer.

Parameters

- **petab_problem** – Managing access to the model and data.

- **output_folder** – Folder to contain the amici model. Defaults to ‘./amici_models/{model_name}’.
- **model_name** – Name of the model, which will in particular be the name of the compiled model python module.
- **validate_petab** – Flag indicating if the PEtab problem shall be validated.

check_gradients (*args, *rtol*: *float* = 0.01, *atol*: *float* = 0.001, *mode*: *Optional[Union[str, List[str]]]* = None, *multi_eps*=None, **kwargs) → *bool*
Check if gradients match finite differences (FDs).

Parameters

- **rtol** (*relative error tolerance*) –
- **atol** (*absolute error tolerance*) –
- **mode** (*function values or residuals*) –
- **objAbsoluteTolerance** (*absolute tolerance in sensitivity calculation*) –
- **objRelativeTolerance** (*relative tolerance in sensitivity calculation*) –
- **multi_eps** (*multiple test step width for FDs*) –

Returns Indicates whether gradients match (True) FDs or not (False)

Return type *bool*

compile_model (**kwargs)

Compile the model.

If the output folder exists already, it is first deleted.

Parameters **kwargs** (Extra arguments passed to *amici.SbmlImporter.sbml2amici*.) –

create_edatas (*model*: *amici.Model* = None, *simulation_conditions*=None) → List[*amici.ExpData*] Create list of *amici.ExpData* objects.

create_model (*force_compile*: *bool* = False, **kwargs) → *amici.Model*
Import amici model.

Parameters

- **force_compile** – If False, the model is compiled only if the output folder does not exist yet. If True, the output folder is deleted and the model (re-)compiled in either case.

Warning: If *force_compile*, then an existing folder of that name will be deleted.

- **kwargs** (*Extra arguments passed to amici.SbmlImporter. sbml2amici*) –

create_objective (*model*: *amici.Model* = None, *solver*: *amici.Solver* = None, *edatas*: *Sequence[amici.ExpData]* = None, *force_compile*: *bool* = False, **kwargs) → *pypesto.objective.amici.AmiciObjective*

Create a *pypesto.AmiciObjective*.

Parameters

- **model** – The AMICI model.

- **solver** – The AMICI solver.
- **edatas** – The experimental data in AMICI format.
- **force_compile** – Whether to force-compile the model if not passed.
- ****kwargs** – Additional arguments passed on to the objective.

Returns A `pypesto.AmiciObjective` for the model and the data.

Return type objective

```
create_predictor(objective: Optional[pypesto.objective.amici.AmiciObjective] = None, amici_output_fields: Optional[Sequence[str]] = None, post_processor: Optional[Callable] = None, post_processor_sensi: Optional[Callable] = None, post_processor_time: Optional[Callable] = None, max_chunk_size: Optional[int] = None, output_ids: Optional[Sequence[str]] = None, condition_ids: Optional[Sequence[str]] = None) → pypesto.predict.amici_predictor.AmiciPredictor
```

Create a `pypesto.predict.AmiciPredictor`.

The `AmiciPredictor` facilitates generation of predictions from parameter vectors.

Parameters

- **objective** – An objective object, which will be used to get model simulations
- **amici_output_fields** – keys that exist in the return data object from AMICI, which should be available for the post-processors
- **post_processor** – A callable function which applies postprocessing to the simulation results. Default are the observables of the AMICI model. This method takes a list of ndarrays (as returned in the field ['y'] of amici ReturnData objects) as input.
- **post_processor_sensi** – A callable function which applies postprocessing to the sensitivities of the simulation results. Default are the observable sensitivities of the AMICI model. This method takes two lists of ndarrays (as returned in the fields ['y'] and ['sy'] of amici ReturnData objects) as input.
- **post_processor_time** – A callable function which applies postprocessing to the timepoints of the simulations. Default are the timepoints of the amici model. This method takes a list of ndarrays (as returned in the field ['t'] of amici ReturnData objects) as input.
- **max_chunk_size** – In some cases, we don't want to compute all predictions at once when calling the prediction function, as this might not fit into the memory for large datasets and models. Here, the user can specify a maximum number of conditions, which should be simulated at a time. Default is 0 meaning that all conditions will be simulated. Other values are only applicable, if an output file is specified.
- **output_ids** – IDs of outputs, if post-processing is used
- **condition_ids** – IDs of conditions, if post-processing is used

Returns A `pypesto.predict.AmiciPredictor` for the model, using the outputs of the AMICI model and the timepoints from the PEtab data

Return type predictor

```
create_prior() → pypesto.objective.priors.NegLogParameterPriors
```

Create a prior from the parameter table.

Returns None, if no priors are defined.

```
create_problem(objective: Optional[pypesoto.objective.amici.AmiciObjective] = None, x_guesses:  
    Optional[Iterable[float]] = None, **kwargs) → pypesoto.problem.Problem  
Create a pypesoto.Problem.
```

Parameters

- **objective** – Objective as created by *create_objective*.
- **x_guesses** – Guesses for the parameter values, shape (g, dim), where g denotes the number of guesses. These are used as start points in the optimization.
- ****kwargs** – Additional key word arguments passed on to the objective, if not provided.

Returns A [pypesoto.Problem](#) for the objective.

Return type

```
problem  
create_solver(model: amici.Model = None) → amici.Solver  
Return model solver.
```

```
create_startpoint_method()  
Create a startpoint method.
```

If the PEtab problem specifies an initializationPrior. Returns None, if no initializationPrior is specified.

```
static from_yaml(yaml_config: Union[dict, str], output_folder: Optional[str] = None,  
    model_name: Optional[str] = None) → pypesoto.petab.importer.PetabImporter  
Simplified constructor using a petab yaml file.
```

```
prediction_to_petab_measurement_df(prediction: pypesoto.predict.result.PredictionResult,  
    predictor: Optional[pypesoto.predict.amici_predictor.AmiciPredictor]  
    = None) → pandas.core.frame.DataFrame  
Cast prediction into a dataframe.
```

If a PEtab problem is simulated without post-processing, then the result can be cast into a PEtab measurement or simulation dataframe

Parameters

- **prediction** – A prediction result as produced by an AmiciPredictor
- **predictor** – The AmiciPredictor function

Returns A dataframe built from the rdatas in the format as in `self.petab_problem.measurement_df`.

Return type

```
measurement_df  
prediction_to_petab_simulation_df(prediction: pypesoto.predict.result.PredictionResult,  
    predictor: Optional[pypesoto.predict.amici_predictor.AmiciPredictor]  
    = None) → pandas.core.frame.DataFrame  
See prediction_to_petab_measurement_df.
```

Except a PEtab simulation dataframe is created, i.e. the measurement column label is adjusted.

```
rdatas_to_measurement_df(rdatas: Sequence[amici.ReturnData], model: amici.Model = None)  
    → pandas.core.frame.DataFrame  
Create a measurement dataframe in the petab format.
```

Parameters

- **rdatas** – A list of rdatas as produced by `pypesoto.AmiciObjective.__call__(x, return_dict=True)[‘rdatas’]`.
- **model** – The amici model.

Returns A dataframe built from the rdatas in the format as in self.petab_problem.measurement_df.

Return type measurement_df

rdatas_to_simulation_df (rdatas: Sequence[amici.ReturnData], model: amici.Model = None) → pandas.core.frame.DataFrame
See rdatas_to_measurement_df.

Except a petab simulation dataframe is created, i.e. the measurement column label is adjusted.

class pypesto.petab.PetabImporterPysb (petab_problem: amici.petab_import_pysb.PysbPetabProblem, output_folder: str = None)

Bases: pypesto.petab.importer.PetabImporter

Import for experimental PySB-based PEtab problems.

__init__ (petab_problem: amici.petab_import_pysb.PysbPetabProblem, output_folder: str = None)
Initialize importer.

Parameters

- **petab_problem** – Managing access to the model and data.
- **output_folder** – Folder to contain the amici model.

compile_model (**kwargs)

Compile the model.

If the output folder exists already, it is first deleted.

Parameters **kwargs** (Extra arguments passed to amici.SbmlImporter.sbml2amici.) –

4.6 Optimize

Multistart optimization with support for various optimizers.

class pypesto.optimize.CmaesOptimizer (par_sigma0: float = 0.25, options: Optional[Dict] = None)

Bases: pypesto.optimize.optimizer.Optimizer

Global optimization using cma-es.

Package homepage: <https://pypi.org/project/cma-es/>

__init__ (par_sigma0: float = 0.25, options: Optional[Dict] = None)
Initialize.

Parameters

- **par_sigma0** – scalar, initial standard deviation in each coordinate. par_sigma0 should be about 1/4th of the search domain width (where the optimum is to be expected)
- **options** – Optimizer options that are directly passed on to cma.

is_least_squares()

Check whether optimizer is a least squares optimizer.

minimize (problem, x0, id, allow_failed_starts, history_options=None)

class pypesto.optimize.DlibOptimizer (options: Optional[Dict] = None)

Bases: pypesto.optimize.optimizer.Optimizer

Use the Dlib toolbox for optimization.

__init__ (*options: Optional[Dict] = None*)
Initialize base class.

get_default_options()
Create default options specific for the optimizer.

is_least_squares()
Check whether optimizer is a least squares optimizer.

minimize (*problem, x0, id, allow_failed_starts, history_options=None*)

class pypesto.optimize.**FidesOptimizer** (*hessian_update: Optional[None] = 'Hybrid', options: Optional[Dict] = None, verbose: Optional[int] = 20*)

Bases: pypesto.optimize.optimizer.Optimizer

Global/Local optimization using the trust region optimizer fides.

Package Homepage: <https://fides-optimizer.readthedocs.io/en/latest>

__init__ (*hessian_update: Optional[None] = 'Hybrid', options: Optional[Dict] = None, verbose: Optional[int] = 20*)
Initialize.

Parameters

- **options** – Optimizer options.
- **hessian_update** – Hessian update strategy. If this is None, a hybrid approximation that switches from the problem.objective provided Hessian (approximation) to a BFGS approximation will be used.

is_least_squares()
Check whether optimizer is a least squares optimizer.

minimize (*problem, x0, id, allow_failed_starts, history_options=None*)

class pypesto.optimize.**IpoptOptimizer** (*options: Optional[Dict] = None*)

Bases: pypesto.optimize.optimizer.Optimizer

Use IpOpt (<https://pypi.org/project/ipopt/>) for optimization.

__init__ (*options: Optional[Dict] = None*)
Initialize.

Parameters **options** – Options are directly passed on to *cyipopt.minimize_ipopt*.

is_least_squares()
Check whether optimizer is a least squares optimizer.

minimize (*problem, x0, id, allow_failed_starts, history_options=None*)

class pypesto.optimize.**NloptOptimizer** (*method=None, local_method=None, options: Optional[Dict] = None, local_options: Optional[Dict] = None*)

Bases: pypesto.optimize.optimizer.Optimizer

Global/Local optimization using NLOpt.

Package homepage: <https://nlopt.readthedocs.io/en/latest/>

__init__ (*method=None, local_method=None, options: Optional[Dict] = None, local_options: Optional[Dict] = None*)
Initialize.

Parameters

- **method** – Local or global Optimizer to use for minimization.
- **local_method** – Local method to use in combination with the global optimizer (for the MSL family of solvers) or to solve a subproblem (for the AUGLAG family of solvers)
- **options** – Optimizer options. scipy option *maxiter* is automatically transformed into *mxeval* and takes precedence.
- **local_options** – Optimizer options for the local method

is_least_squares()

Check whether optimizer is a least squares optimizer.

minimize(problem, x0, id, allow_failed_starts, history_options=None)

```
class pypesto.optimize.OptimizeOptions(startpoint_resample: bool = False, allow_failed_starts: bool = True, report_sres: bool = True, report_hess: bool = True)
```

Bases: *dict*

Options for the multistart optimization.

Parameters

- **startpoint_resample** – Flag indicating whether initial points are supposed to be resampled if function evaluation fails at the initial point
- **allow_failed_starts** – Flag indicating whether we tolerate that exceptions are thrown during the minimization process.
- **report_sres** – Flag indicating whether sres will be stored in the results object. Deactivating this option will improve memory consumption for large scale problems.
- **report_hess** – Flag indicating whether hess will be stored in the results object. Deactivating this option will improve memory consumption for large scale problems.

__init__(startpoint_resample: bool = False, allow_failed_starts: bool = True, report_sres: bool = True, report_hess: bool = True)

Initialize self. See help(type(self)) for accurate signature.

static assert_instance(maybe_options: Union[pypesto.optimize.options.OptimizeOptions, Dict]) → pypesto.optimize.options.OptimizeOptions

Return a valid options object.

Parameters maybe_options (OptimizeOptions or dict) –**class pypesto.optimize.Optimizer**

Bases: *abc.ABC*

Optimizer base class, not functional on its own.

An optimizer takes a problem, and possibly a start point, and then performs an optimization. It returns an OptimizerResult.

__init__()

Initialize base class.

get_default_options()

Create default options specific for the optimizer.

abstract is_least_squares()

Check whether optimizer is a least squares optimizer.

abstract minimize(problem, x0, id, allow_failed_starts, history_options=None)

```
class pypesto.optimize.OptimizerResult(id: Optional[str] = None, x: Optional[numPy.ndarray] = None, fval: Optional[float] = None, grad: Optional[numPy.ndarray] = None, hess: Optional[numPy.ndarray] = None, res: Optional[numPy.ndarray] = None, sres: Optional[numPy.ndarray] = None, n_fval: Optional[int] = None, n_grad: Optional[int] = None, n_hess: Optional[int] = None, n_res: Optional[int] = None, n_sres: Optional[int] = None, x0: Optional[numPy.ndarray] = None, fval0: Optional[float] = None, history: Optional[pypesto.objective.history.History] = None, exitflag: Optional[int] = None, time: Optional[float] = None, message: Optional[str] = None)
```

Bases: dict

The result of an optimizer run.

Used as a standardized return value to map from the individual result objects returned by the employed optimizers to the format understood by pypesto.

Can be used like a dict.

id

Id of the optimizer run. Usually the start index.

x

The best found parameters.

fval

The best found function value, $fun(x)$.

grad

The gradient at x .

hess

The Hessian at x .

res

The residuals at x .

sres

The residual sensitivities at x .

n_fval

Number of function evaluations.

n_grad

Number of gradient evaluations.

n_hess

Number of Hessian evaluations.

n_res

Number of residuals evaluations.

n_sres

Number of residual sensitivity evaluations.

x0

The starting parameters.

fval0

The starting function value, $fun(x_0)$.

history

Objective history.

exitflag

The exitflag of the optimizer.

time

Execution time.

message

Textual comment on the optimization result.

Type str

Notes

Any field not supported by the optimizer is filled with None.

__init__(id: Optional[str] = None, x: Optional[numumpy.ndarray] = None, fval: Optional[float] = None, grad: Optional[numumpy.ndarray] = None, hess: Optional[numumpy.ndarray] = None, res: Optional[numumpy.ndarray] = None, sres: Optional[numumpy.ndarray] = None, n_fval: Optional[int] = None, n_grad: Optional[int] = None, n_hess: Optional[int] = None, n_res: Optional[int] = None, n_sres: Optional[int] = None, x0: Optional[numumpy.ndarray] = None, fval0: Optional[float] = None, history: Optional[pypesto.objective.history.History] = None, exitflag: Optional[int] = None, time: Optional[float] = None, message: Optional[str] = None)
 Initialize self. See help(type(self)) for accurate signature.

update_to_full(problem: pypesto.problem.Problem) → None
 Update values to full vectors/matrices.

Parameters **problem** – problem which contains info about how to convert to full vectors or matrices

class pypesto.optimize.PyswarmOptimizer(options: Optional[Dict] = None)
 Bases: pypesto.optimize.optimizer.Optimizer

Global optimization using pyswarm.

__init__(options: Optional[Dict] = None)
 Initialize base class.

is_least_squares()

Check whether optimizer is a least squares optimizer.

minimize(problem, x0, id, allow_failed_starts, history_options=None)

class pypesto.optimize.PyswarmsOptimizer(par_popszie: float = 10, options: Optional[Dict] = None)
 Bases: pypesto.optimize.optimizer.Optimizer

Global optimization using pyswarms.

Package homepage: <https://pyswarms.readthedocs.io/en/latest/index.html>

Parameters

- **par_popszie** – number of particles in the swarm, default value 10

- **options** – Optimizer options that are directly passed on to pyswarms. c1: cognitive parameter c2: social parameter w: inertia parameter Default values are (c1,c2,w) = (0.5, 0.3, 0.9)

Examples

Arguments that can be passed to options:

maxiter: used to calculate the maximal number of function evaluations. Default: 1000

`__init__(par_popszie: float = 10, options: Optional[Dict] = None)`

Initialize base class.

`is_least_squares()`

Check whether optimizer is a least squares optimizer.

`minimize(problem, x0, id, allow_failed_starts, history_options=None)`

`class pypesto.optimize.ScipyDifferentialEvolutionOptimizer(options: Optional[Dict] = None)`

Bases: pypesto.optimize.optimizer.Optimizer

Global optimization using scipy's differential evolution optimizer.

Package homepage: https://docs.scipy.org/doc/scipy/reference/generated/scipy.optimize.differential_evolution.html

Parameters **options** – Optimizer options that are directly passed on to scipy's optimizer.

Examples

Arguments that can be passed to options:

maxiter: used to calculate the maximal number of function evaluations by maxfevals = (maxiter + 1) * popsize * len(x) Default: 100

popszie: population size, default value 15

`__init__(options: Optional[Dict] = None)`

Initialize base class.

`is_least_squares()`

Check whether optimizer is a least squares optimizer.

`minimize(problem, x0, id, allow_failed_starts, history_options=None)`

`class pypesto.optimize.ScipyOptimizer(method: str = 'L-BFGS-B', tol: float = 1e-09, options: Optional[Dict] = None)`

Bases: pypesto.optimize.optimizer.Optimizer

Use the SciPy optimizers.

Find details on the optimizer and configuration options at: <https://docs.scipy.org/doc/scipy/reference/generated/scipy.optimize.minimize.html#scipy.optimize.minimize>

`__init__(method: str = 'L-BFGS-B', tol: float = 1e-09, options: Optional[Dict] = None)`

Initialize base class.

`get_default_options()`

Create default options specific for the optimizer.

`is_least_squares()`

Check whether optimizer is a least squares optimizer.

```
minimize(problem, x0, id, allow_failed_starts, history_options=None)
```

```
pypesto.optimize.minimize(problem: pypesto.problem.Problem, optimizer: Optional[pypesto.optimize.optimizer.Optimizer] = None, n_starts: int = 100, ids: Optional[Iterable[str]] = None, startpoint_method: Optional[Union[pypesto.startpoint.base.StartpointMethod, bool]] = None, result: Optional[pypesto.result.Result] = None, engine: Optional[pypesto.engine.base.Engine] = None, progress_bar: bool = True, options: Optional[pypesto.optimize.options.OptimizeOptions] = None, history_options: Optional[pypesto.objective.history.HistoryOptions] = None, filename: str = 'Auto') → pypesto.result.Result
```

Do multistart optimization.

Parameters

- **problem** – The problem to be solved.
- **optimizer** – The optimizer to be used n_starts times.
- **n_starts** – Number of starts of the optimizer.
- **ids** – Ids assigned to the startpoints.
- **startpoint_method** – Method for how to choose start points. False means the optimizer does not require start points, e.g. for the ‘PyswarmOptimizer’.
- **result** – A result object to append the optimization results to. For example, one might append more runs to a previous optimization. If None, a new object is created.
- **engine** – Parallelization engine. Defaults to sequential execution on a SingleCoreEngine.
- **progress_bar** – Whether to display a progress bar.
- **options** – Various options applied to the multistart optimization.
- **history_options** – Optimizer history options.
- **filename** – Name of the hdf5 file, where the result will be saved. Default is “Auto”, in which case it will automatically generate a file named *year_month_day_optimization_result.hdf5*. Deactivate saving by setting filename to *None*.

Returns Result object containing the results of all multistarts in *result.optimize_result*.

Return type result

```
pypesto.optimize.read_result_from_file(problem: pypesto.problem.Problem, history_options: pypesto.objective.history.HistoryOptions, identifier: str)
```

Fill an OptimizerResult from history.

4.7 Profile

```
class pypesto.profile.ProfileOptions(default_step_size: float = 0.01, min_step_size: float = 0.001, max_step_size: float = 1.0, step_size_factor: float = 1.25, delta_ratio_max: float = 0.1, ratio_min: float = 0.145, reg_points: int = 10, reg_order: int = 4, magic_factor_obj_value: float = 0.5)
```

Bases: `dict`

Options for optimization based profiling.

Parameters

- **default_step_size** – Default step size of the profiling routine along the profile path (adaptive step lengths algorithms will only use this as a first guess and then refine the update).
- **min_step_size** – Lower bound for the step size in adaptive methods.
- **max_step_size** – Upper bound for the step size in adaptive methods.
- **step_size_factor** – Adaptive methods recompute the likelihood at the predicted point and try to find a good step length by a sort of line search algorithm. This factor controls step handling in this line search.
- **delta_ratio_max** – Maximum allowed drop of the posterior ratio between two profile steps.
- **ratio_min** – Lower bound for likelihood ratio of the profile, based on inverse chi²-distribution. The default 0.145 is slightly lower than the 95% quantile 0.1465 of a chi² distribution with one degree of freedom.
- **reg_points** – Number of profile points used for regression in regression based adaptive profile points proposal.
- **reg_order** – Maximum degree of regression polynomial used in regression based adaptive profile points proposal.
- **magic_factor_obj_value** – There is this magic factor in the old profiling code which slows down profiling at small ratios (must be >= 0 and < 1).

```
__init__(default_step_size: float = 0.01, min_step_size: float = 0.001, max_step_size: float = 1.0,  
        step_size_factor: float = 1.25, delta_ratio_max: float = 0.1, ratio_min: float = 0.145,  
        reg_points: int = 10, reg_order: int = 4, magic_factor_obj_value: float = 0.5)  
    Initialize self. See help(type(self)) for accurate signature.
```

```
static create_instance(maybe_options: Union[pypesto.profile.options.ProfileOptions, Dict])  
    → pypesto.profile.options.ProfileOptions  
Return a valid options object.
```

Parameters `maybe_options` (`ProfileOptions` or `dict`) –

```
class pypesto.profile.ProfilerResult(x_path: numpy.ndarray, fval_path: numpy.ndarray,  
                                         ratio_path: numpy.ndarray, gradnorm_path: Optional[numpy.ndarray] = None, exitflag_path: Optional[numpy.ndarray] = None, time_path: Optional[numpy.ndarray] = None, time_total: float = 0.0,  
                                         n_fval: int = 0, n_grad: int = 0, n_hess: int = 0, message: Optional[str] = None)
```

Bases: `dict`

The result of a profiler run.

The standardized return value from `pypesto.profile`, which can either be initialized from an `OptimizerResult` or from an existing `ProfilerResult` (in order to extend the computation).

Can be used like a dict.

x_path

The path of the best found parameters along the profile (Dimension: n_par x n_profile_points)

fval_path

The function values, `fun(x)`, along the profile.

ratio_path

The ratio of the posterior function along the profile.

gradnorm_path

The gradient norm along the profile.

exitflag_path

The exitflags of the optimizer along the profile.

time_path

The computation time of the optimizer runs along the profile.

time_total

The total computation time for the profile.

n_fval

Number of function evaluations.

n_grad

Number of gradient evaluations.

n_hess

Number of Hessian evaluations.

message

Textual comment on the profile result.

Notes

Any field not supported by the profiler or the profiling optimizer is filled with None. Some fields are filled by pypesto itself.

```
__init__(x_path: numpy.ndarray, fval_path: numpy.ndarray, ratio_path: numpy.ndarray, grad-
norm_path: Optional[numpy.ndarray] = None, exitflag_path: Optional[numpy.ndarray] =
None, time_path: Optional[numpy.ndarray] = None, time_total: float = 0.0, n_fval: int = 0,
n_grad: int = 0, n_hess: int = 0, message: Optional[str] = None)
Initialize self. See help(type(self)) for accurate signature.
```

```
append_profile_point(x: numpy.ndarray, fval: float, ratio: float, gradnorm: float = nan, time:
float = nan, exitflag: float = nan, n_fval: int = 0, n_grad: int = 0, n_hess:
int = 0) → None
```

Append a new point to the profile path.

Parameters

- **x** – The parameter values.
- **fval** – The function value at x .
- **ratio** – The ratio of the function value at x by the optimal function value.
- **gradnorm** – The gradient norm at x .
- **time** – The computation time to find x .
- **exitflag** – The exitflag of the optimizer (useful if an optimization was performed to find x).
- **n_fval** – Number of function evaluations performed to find x .
- **n_grad** – Number of gradient evaluations performed to find x .
- **n_hess** – Number of Hessian evaluations performed to find x .

```
flip_profile() → None
```

Flip the profiling direction (left-right).

Profiling direction needs to be changed once (if the profile is new), or twice if we append to an existing profile. All profiling paths are flipped in-place.

```
pypesto.profile.approximate_parameter_profile(problem: pypesto.problem.Problem, result: pypesto.result.Result, profile_index: Optional[Iterable[int]] = None, profile_list: Optional[int] = None, result_index: int = 0, n_steps: int = 100) → pypesto.result.Result
```

Calculate profile approximation.

Based on an approximation via a normal likelihood centered at the chosen optimal parameter value, with the covariance matrix being the Hessian or FIM.

Parameters

- **problem** – The problem to be solved.
- **result** – A result object to initialize profiling and to append the profiling results to. For example, one might append more profiling runs to a previous profile, in order to merge these. The existence of an optimization result is obligatory.
- **profile_index** – List with the profile indices to be computed (by default all of the free parameters).
- **profile_list** – Integer which specifies whether a call to the profiler should create a new list of profiles (default) or should be added to a specific profile list.
- **result_index** – Index from which optimization result profiling should be started (default: global optimum, i.e., index = 0).
- **n_steps** – Number of profile steps in each dimension.

Returns The profile results are filled into *result.profile_result*.

Return type

```
pypesto.profile.calculate_approximate_ci(xs: numpy.ndarray, ratios: numpy.ndarray, confidence_ratio: float) → Tuple[float, float]
```

Calculate approximate confidence interval based on profile.

Interval bounds are linearly interpolated.

Parameters

- **xs** – The ordered parameter values along the profile for the coordinate of interest.
- **ratios** – The likelihood ratios corresponding to the parameter values.
- **confidence_ratio** – Minimum confidence ratio to base the confidence interval upon, as obtained via *pypesto.profile.chi2_quantile_to_ratio*.

Returns Bounds of the approximate confidence interval.

Return type

```
pypesto.profile.chi2_quantile_to_ratio(alpha: float = 0.95, df: int = 1)
```

Compute profile likelihood threshold.

Transform lower tail probability *alpha* for a chi2 distribution with *df* degrees of freedom to a profile likelihood ratio threshold.

Parameters

- **alpha** – Lower tail probability, defaults to 95% interval.

- **df** – Degrees of freedom.

Returns Corresponds to a likelihood ratio.

Return type ratio

```
pypesto.profile.parameter_profile(problem: pypesto.problem.Problem, re-
sult: pypesto.result.Result, optimizer: pypesto.optimize.optimizer.Optimizer, engine: Op-
tional[pypesto.engine.base.Engine] = None, pro-
file_index: Optional[Iterable[int]] = None, pro-
file_list: Optional[int] = None, result_index: int
= 0, next_guess_method: Union[Callable, str] =
'adaptive_step_regression', profile_options: Op-
tional[pypesto.profile.options.ProfileOptions] = None,
progress_bar: bool = True, filename: str = 'Auto') →
pypesto.result.Result
```

Call to do parameter profiling.

Parameters

- **problem** – The problem to be solved.
- **result** – A result object to initialize profiling and to append the profiling results to. For example, one might append more profiling runs to a previous profile, in order to merge these. The existence of an optimization result is obligatory.
- **optimizer** – The optimizer to be used along each profile.
- **engine** – The engine to be used.
- **profile_index** – List with the parameter indices to be profiled (by default all free indices).
- **profile_list** – Integer which specifies whether a call to the profiler should create a new list of profiles (default) or should be added to a specific profile list.
- **result_index** – Index from which optimization result profiling should be started (default: global optimum, i.e., index = 0).
- **next_guess_method** – Function handle to a method that creates the next starting point for optimization in profiling.
- **profile_options** – Various options applied to the profile optimization.
- **progress_bar** – Whether to display a progress bar.
- **filename** – Name of the hdf5 file, where the result will be saved. Default is “Auto”, in which case it will automatically generate a file named *year_month_day_profiling_result.hdf5*. Deactivate saving by setting filename to *None*.

Returns The profile results are filled into *result.profile_result*.

Return type result

```
pypesto.profile.validation_profile_significance(problem_full_data:  
    pypesto.problem.Problem,  
    result_training_data:  
        pypesto.result.Result, result_full_data:  
            Optional[pypesto.result.Result]  
            = None, n_starts: Optional[int] = 1, optimizer: Optional[pypesto.optimize.optimizer.Optimizer]  
            = None, engine: Optional[pypesto.engine.base.Engine] = None, lsq_objective: bool = False,  
            return_significance: bool = True) → float
```

Compute significance of Validation Interval.

It is a confidence region/interval for a new validation experiment.¹ et al. (This method per default returns the significance = 1-alpha!)

The reasoning behind their approach is, that a validation data set is outside the validation interval, if fitting the full data set would lead to a fit θ_{new} , that does not contain the old fit θ_{train} in their (Profile-Likelihood) based parameter-confidence intervals. (I.e. the old fit would be rejected by the fit of the full data.)

This method returns the significance of the validation data set (where *result_full_data* is the objective function for fitting both data sets). I.e. the largest alpha, such that there is a validation region/interval such that the validation data set lies outside this Validation Interval with probability alpha. (If one is interested in the opposite, set *return_significance=False*.)

Parameters

- **problem_full_data** – pypesto.problem, such that the objective is the negative-log-likelihood of the training and validation data set.
- **result_training_data** – result object from the fitting of the training data set only.
- **result_full_data** – pypesto.result object that contains the result of fitting training and validation data combined.
- **n_starts** – number of starts for fitting the full data set (if *result_full_data* is not provided).
- **optimizer** – optimizer used for refitting the data (if *result_full_data* is not provided).
- **engine** – engine for refitting (if *result_full_data* is not provided).
- **lsq_objective** – indicates if the objective of *problem_full_data* corresponds to a nllh (False), or a chi² value (True).
- **return_significance** – indicates, if the function should return the significance (True) (i.e. the probability, that the new data set lies outside the Confidence Interval for the validation experiment, as given by the method), or the largest alpha, such that the validation experiment still lies within the Confidence Interval (False). I.e. alpha = 1-significance.

¹ Kreutz, Clemens, Raue, Andreas and Timmer, Jens. “Likelihood based observability analysis and confidence intervals for predictions of dynamic models”. BMC Systems Biology 2012/12. doi:10.1186/1752-0509-6-120

4.8 Sample

Draw samples from the distribution, with support for various samplers.

```
class pypesto.sample.AdaptiveMetropolisSampler(options: Optional[Dict] = None)
Bases: pypesto.sample.metropolis.MetropolisSampler
```

Metropolis-Hastings sampler with adaptive proposal covariance.

```
__init__(options: Optional[Dict] = None)
```

Initialize self. See help(type(self)) for accurate signature.

```
classmethod default_options()
```

Return the default options for the sampler.

```
initialize(problem: pypesto.problem.Problem, x0: numpy.ndarray)
```

Initialize the sampler.

```
class pypesto.sample.AdaptiveParallelTemperingSampler(internal_sampler:
```

```
pypesto.sample.sampler.InternalSampler,
betas: Sequence[float]]
= None, n_chains: Optional[int] = None, options:
Optional[Dict] = None)
```

Bases: pypesto.sample.parallel_tempering.ParallelTemperingSampler

Parallel tempering sampler with adaptive temperature adaptation.

```
adjust_betas(i_sample: int, swapped: Sequence[bool])
```

Update temperatures as in Vousden2016.

```
classmethod default_options() → Dict
```

Get default options for sampler.

```
class pypesto.sample.EmceeSampler(nwalkers: int = 1, sampler_args: Optional[dict] = None,
run_args: Optional[dict] = None)
```

Bases: pypesto.sample.sampler.Sampler

Use emcee for sampling.

Wrapper around <https://emcee.readthedocs.io/en/stable/>, see there for details.

```
__init__(nwalkers: int = 1, sampler_args: Optional[dict] = None, run_args: Optional[dict] = None)
```

Initialize sampler.

Parameters

- **nwalkers** (*The number of walkers in the ensemble.*) –
- **sampler_args** – Further keyword arguments that are passed on to emcee. EnsembleSampler.`__init__`.
- **run_args** – Further keyword arguments that are passed on to emcee. EnsembleSampler.`run_mcmc`.

```
get_samples() → pypesto.sample.result.McmcPtResult
```

Get the samples into the fitting pypesto format.

```
initialize(problem: pypesto.problem.Problem, x0: Union[numpy.ndarray, List[numpy.ndarray]])
```

```
→ None
```

Initialize the sampler.

sample (*n_samples*: *int*, *beta*: *float* = 1.0) → *None*
Return the most recent sample state.

class `pypesto.sample.InternalSampler` (*options*: *Optional[Dict]* = *None*)
Bases: `pypesto.sample.sampler.Sampler`

Sampler to be used inside a parallel tempering sampler.

The last sample can be obtained via `get_last_sample` and set via `set_last_sample`.

abstract `get_last_sample()` → `pypesto.sample.sampler.InternalSample`
Get the last sample in the chain.

Returns The last sample in the chain in the exchange format.

Return type `internal_sample`

make_internal (*temper_lpost*: *bool*)

Allow the inner samplers to be used as inner samplers.

Can be called by parallel tempering samplers during initialization. Default: Do nothing.

Parameters `temper_lpost` – Whether to temperate the posterior or only the likelihood.

abstract `set_last_sample` (*sample*: `pypesto.sample.sampler.InternalSample`)
Set the last sample in the chain to the passed value.

Parameters `sample` – The sample that will replace the last sample in the chain.

class `pypesto.sample.McmcPtResult` (*trace_x*: `numpy.ndarray`, *trace_neglogpost*: `numpy.ndarray`,
trace_neglogprior: `numpy.ndarray`, *betas*: `Iterable[float]`,
burn_in: `Optional[int]` = *None*, *time*: `float` = 0.0,
auto_correlation: `Optional[float]` = *None*, *effective_sample_size*: `Optional[float]` = *None*, *message*:
`Optional[str]` = *None*)

Bases: `dict`

The result of a sampler run using Markov-chain Monte Carlo.

Currently result object of all supported samplers. Can be used like a dict.

Parameters

- `trace_x` ([*n_chain*, *n_iter*, *n_par*]) – Parameters.
- `trace_neglogpost` ([*n_chain*, *n_iter*]) – Negative log posterior values.
- `trace_neglogprior` ([*n_chain*, *n_iter*]) – Negative log prior values.
- `betas` ([*n_chain*]) – The associated inverse temperatures.
- `burn_in` ([*n_chain*]) – The burn in index.
- `time` ([*n_chain*]) – The computation time.
- `auto_correlation` ([*n_chain*]) – The estimated chain autocorrelation.
- `effective_sample_size` ([*n_chain*]) – The estimated effective sample size.
- `message` (`str`) – Textual comment on the profile result.
- `Here` –
- `denotes the number of chains` (*n_chain*) –
- `the number of` (*n_iter*) –
- `(i.e. (iterations))` –

- **chain_length**) (*the*) –
- **n_par** the number of parameters. (*and*) –

__init__(*trace_x*: *numpy.ndarray*, *trace_neglogpost*: *numpy.ndarray*, *trace_neglogprior*: *numpy.ndarray*, *betas*: *Iterable[float]*, *burn_in*: *Optional[int]* = *None*, *time*: *float* = 0.0, *auto_correlation*: *Optional[float]* = *None*, *effective_sample_size*: *Optional[float]* = *None*, *message*: *Optional[str]* = *None*)
 Initialize self. See help(type(self)) for accurate signature.

class *pypesto.sample.MetropolisSampler*(*options*: *Optional[Dict]* = *None*)
 Bases: *pypesto.sample.sampler.InternalSampler*

Simple Metropolis-Hastings sampler with fixed proposal variance.

__init__(*options*: *Optional[Dict]* = *None*)
 Initialize self. See help(type(self)) for accurate signature.

classmethod default_options()
 Return the default options for the sampler.

get_last_sample() → *pypesto.sample.sampler.InternalSample*
 Get the last sample in the chain.

Returns The last sample in the chain in the exchange format.

Return type *internal_sample*

get_samples() → *pypesto.sample.result.McmcPtResult*
 Get the samples into the fitting pypesto format.

initialize(*problem*: *pypesto.problem.Problem*, *x0*: *numpy.ndarray*)
 Initialize the sampler.

make_internal(*temper_lpost*: *bool*)
 Allow the inner samplers to be used as inner samplers.
 Can be called by parallel tempering samplers during initialization. Default: Do nothing.

Parameters **temper_lpost** – Whether to temperate the posterior or only the likelihood.

sample(*n_samples*: *int*, *beta*: *float* = 1.0)
 Load last recorded particle.

set_last_sample(*sample*: *pypesto.sample.sampler.InternalSample*)
 Set the last sample in the chain to the passed value.

Parameters **sample** – The sample that will replace the last sample in the chain.

class *pypesto.sample.ParallelTemperingSampler*(*internal_sampler*:
pypesto.sample.sampler.InternalSampler,
betas: *Optional[Sequence[float]]* = *None*,
n_chains: *Optional[int]* = *None*, *options*: *Optional[Dict]* = *None*)
 Bases: *pypesto.sample.sampler.Sampler*

Simple parallel tempering sampler.

__init__(*internal_sampler*: *pypesto.sample.sampler.InternalSampler*, *betas*: *Optional[Sequence[float]]* = *None*, *n_chains*: *Optional[int]* = *None*, *options*: *Optional[Dict]* = *None*)
 Initialize self. See help(type(self)) for accurate signature.

adjust_betas(*i_sample*: *int*, *swapped*: *Sequence[bool]*)
 Adjust temperature values. Default: Do nothing.

```
classmethod default_options() → Dict
    Return the default options for the sampler.

get_samples() → pypesto.sample.result.McmcPtResult
    Concatenate all chains.

initialize(problem: pypesto.problem.Problem, x0: Union[numpy.ndarray, List[numpy.ndarray]])
    Initialize all samplers.

sample(n_samples: int, beta: float = 1.0)
    Sample and swap in between samplers.

swap_samples() → Sequence[bool]
    Swap samples as in Vosden2016.

class pypesto.sample.Pymc3Sampler(step_function=None, **kwargs)
    Bases: pypesto.sample.sampler.Sampler

    Wrapper around Pymc3 samplers.
```

Parameters

- **step_function** – A pymc3 step function, e.g. NUTS, Slice. If not specified, pymc3 determines one automatically (preferable).
- ****kwargs** – Options are directly passed on to *pymc3.sample*.

```
__init__(step_function=None, **kwargs)
    Initialize self. See help(type(self)) for accurate signature.
```

```
get_samples() → pypesto.sample.result.McmcPtResult
    Convert result from Pymc3 to McmcPtResult.
```

```
initialize(problem: pypesto.problem.Problem, x0: numpy.ndarray)
    Initialize the sampler.
```

Parameters

- **problem** – The problem for which to sample.
- **x0** – Should, but is not required to, be used as initial parameter.

```
sample(n_samples: int, beta: float = 1.0)
    Sample the problem.
```

Parameters

- **n_samples** – Number of samples to be computed.
- **beta** – Inverse temperature for the log probability function.

```
classmethod translate_options(options)
    Translate options and fill in defaults.
```

Parameters **options** – Options configuring the sampler.

```
class pypesto.sample.Sampler(options: Optional[Dict] = None)
    Bases: abc.ABC

    Sampler base class, not functional on its own.
```

The sampler maintains an internal chain, which is initialized in *initialize*, and updated in *sample*.

```
__init__(options: Optional[Dict] = None)
    Initialize self. See help(type(self)) for accurate signature.
```

classmethod default_options() → Dict
Set/Get default options.

Returns Default sampler options.

Return type default_options

abstract get_samples() → pypesto.sample.result.McmcPtResult
Get the generated samples.

abstract initialize(problem: pypesto.problem.Problem, x0: Union[numpy.ndarray, List[numpy.ndarray]])
Initialize the sampler.

Parameters

- **problem** – The problem for which to sample.
- **x0** – Should, but is not required to, be used as initial parameter.

abstract sample(n_samples: int, beta: float = 1.0)

Perform sampling.

Parameters

- **n_samples** – Number of samples to generate.
- **beta** – Inverse of the temperature to which the system is elevated.

classmethod translate_options(options)

Translate options and fill in defaults.

Parameters **options** – Options configuring the sampler.

pypesto.sample.auto_correlation(result: pypesto.result.Result) → float

Calculate the autocorrelation of the MCMC chains.

Parameters **result** – The pyPESTO result object with filled sample result.

Returns Estimate of the integrated autocorrelation time of the MCMC chains.

Return type auto_correlation

pypesto.sample.calculate_ci_mcmc_sample(result: pypesto.result.Result, ci_level: float = 0.95, exclude_burn_in: bool = True) → Tuple[numpy.ndarray, numpy.ndarray]

Calculate parameter credibility intervals based on MCMC samples.

Parameters

- **result** – The pyPESTO result object with filled sample result.
- **ci_level** – Lower tail probability, defaults to 95% interval.

Returns Bounds of the MCMC percentile-based confidence interval.

Return type lb, ub

pypesto.sample.calculate_ci_mcmc_sample_prediction(simulated_values: numpy.ndarray, ci_level: float = 0.95) → Tuple[numpy.ndarray, numpy.ndarray]

Calculate prediction credibility intervals based on MCMC samples.

Parameters

- **simulated_values** – Simulated model states or model observables.

- **ci_level** – Lower tail probability, defaults to 95% interval.

Returns Bounds of the MCMC-based prediction confidence interval.

Return type lb, ub

`pypesto.sample.effective_sample_size(result: pypesto.result.Result) → float`

Calculate the effective sample size of the MCMC chains.

Parameters `result` – The pyPESTO result object with filled sample result.

Returns Estimate of the effective sample size of the MCMC chains.

Return type ess

`pypesto.sample.geweke_test(result: pypesto.result.Result, zscore: float = 2.0) → int`

Calculate the burn-in of MCMC chains.

Parameters

- **result** – The pyPESTO result object with filled sample result.
- **zscore** – The Geweke test threshold.

Returns Iteration where the first and the last fraction of the chain do not differ significantly regarding Geweke test -> Burn-In

Return type burn_in

`pypesto.sample.sample(problem: pypesto.problem.Problem, n_samples: int, sampler: Optional[pypesto.sample.sampler.Sampler] = None, x0: Optional[Union[numpy.ndarray, List[numpy.ndarray]]] = None, result: Optional[pypesto.result.Result] = None, filename: str = 'Auto') → pypesto.result.Result`

Call to do parameter sampling.

Parameters

- **problem** – The problem to be solved. If None is provided, a `pypesto.AdaptiveMetropolisSampler` is used.
- **n_samples** – Number of samples to generate.
- **sampler** – The sampler to perform the actual sampling.
- **x0** – Initial parameter for the Markov chain. If None, the best parameter found in optimization is used. Note that some samplers require an initial parameter, some may ignore it. x0 can also be a list, to have separate starting points for parallel tempering chains.
- **result** – A result to write to. If None provided, one is created from the problem.
- **filename** – Name of the hdf5 file, where the result will be saved. Default is “Auto”, in which case it will automatically generate a file named `year_month_day_sampling_result.hdf5`. Deactivate saving by setting filename to `None`.

Returns A result with filled in sample_options part.

Return type result

4.9 Result

The pypesto.Result object contains all results generated by the pypesto components. It contains sub-results for optimization, profiling, sampling.

`class pypesto.result.OptimizeResult`

Bases: `object`

Result of the `pypesto.optimize.minimize()` function.

`__init__()`

Initialize self. See help(type(self)) for accurate signature.

`append(optimizer_result: optimize.OptimizerResult)`

Append an optimizer result to the result object.

Parameters `optimizer_result` – The result of one (local) optimizer run.

`as_dataframe(keys=None) → pandas.core.frame.DataFrame`

Get as pandas DataFrame.

If keys is a list, return only the specified values, otherwise all.

`as_list(keys=None) → Sequence`

Get as list.

If keys is a list, return only the specified values.

Parameters `keys(list(str), optional)` – Labels of the field to extract.

`get_for_key(key) → list`

Extract the list of values for the specified key as a list.

`sort()`

Sort the optimizer results by function value fval (ascending).

`class pypesto.result.ProfileResult`

Bases: `object`

Result of the profile() function.

It holds a list of profile lists. Each profile list consists of a list of `ProfilerResult` objects, one for each parameter.

`__init__()`

Initialize self. See help(type(self)) for accurate signature.

`append_empty_profile_list() → int`

Append an empty profile list to the list of profile lists.

Returns The index of the created profile list.

Return type `index`

`append_profiler_result(profiler_result: profile.ProfilerResult = None, profile_list: int = None)`

Append the profiler result to the profile list.

Parameters

- `profiler_result` – The result of one profiler run for a parameter, or `None` if to be left empty.
- `profile_list` – Index specifying the profile list to which we want to append. Defaults to the last list.

```
get_profiler_result (i_par: int, profile_list: Optional[int] = None)
    Get the profiler result at parameter index i_par of profile_list.
```

Parameters

- **i_par** – Integer specifying the profile index.
- **profile_list** – Index specifying the profile list. Defaults to the last list.

```
set_profiler_result (profiler_result: profile.ProfilerResult, i_par: int, profile_list: int = None)
    → None
    Write a profiler result to the result object.
```

Parameters

- **profiler_result** – The result of one (local) profiler run.
- **i_par** – Integer specifying the parameter index where to put profiler_result.
- **profile_list** – Index specifying the profile list. Defaults to the last list.

```
class pypesto.result.Result (problem=None)
    Bases: object
```

Universal result object for pypesto.

The algorithms like optimize, profile, sample fill different parts of it.

problem

The problem underlying the results.

Type *pypesto.Problem*

optimize_result

The results of the optimizer runs.

profile_result

The results of the profiler run.

sample_result

The results of the sampler run.

__init__(problem=None)

Initialize self. See help(type(self)) for accurate signature.

```
class pypesto.result.SampleResult
    Bases: object
```

Result of the sample() function.

__init__()

Initialize self. See help(type(self)) for accurate signature.

4.10 Visualize

pypesto comes with various visualization routines. To use these, import pypesto.visualize.

```
class pypesto.visualize.ReferencePoint (reference=None, x=None, fval=None, color=None,
                                         legend=None)
```

Bases: dict

Reference point for plotting.

Should contain a parameter value and an objective function value, may also contain a color and a legend.

Can be used like a dict.

x

Reference parameters.

Type ndarray

fval

Function value, $\text{fun}(x)$, for reference parameters.

Type float

color

Color which should be used for reference point.

Type RGBA, optional

auto_color

flag indicating whether color for this reference point should be assigned automatically or whether it was assigned by user

Type boolean

legend

legend text for reference point

Type str

__init__(reference=None, x=None, fval=None, color=None, legend=None)

Initialize self. See help(type(self)) for accurate signature.

```
pypesto.visualize.assign_clustered_colors(vals,           balance_alpha=True,      high-
                                             light_global=True)
```

Cluster and assign colors.

Parameters

- **vals** (numeric list or array) – List to be clustered and assigned colors.
- **balance_alpha** (bool (optional)) – Flag indicating whether alpha for large clusters should be reduced to avoid overplotting (default: True)
- **highlight_global** (bool (optional)) – flag indicating whether global optimum should be highlighted

Returns colors – One for each element in ‘vals’.

Return type list of RGBA

```
pypesto.visualize.assign_clusters(vals)
```

Find clustering.

Parameters **vals** (numeric list or array) – List to be clustered.

Returns

- **clust** (numeric list) – Indicating the corresponding cluster of each element from ‘vals’.
- **clustsize** (numeric list) – Size of clusters, length equals number of clusters.

```
pypesto.visualize.assign_colors(vals,      colors=None,      balance_alpha=True,      high-
                                         light_global=True)
```

Assign colors or format user specified colors.

Parameters

- **vals** (numeric list or array) – List to be clustered and assigned colors.

- **colors** (*list*, or *RGB*A, *optional*) – list of colors, or single color
- **balance_alpha** (*bool* (*optional*)) – Flag indicating whether alpha for large clusters should be reduced to avoid overplotting (default: True)
- **highlight_global** (*bool* (*optional*)) – flag indicating whether global optimum should be highlighted

Returns **colors** – One for each element in ‘vals’.

Return type list of *RGB*A

```
pypesto.visualize.create_references(references=None,           x=None,          fval=None,
                                      color=None,          legend=None)      →
                                         List[pypesto.visualize.reference_points.ReferencePoint]
```

Create a list of reference point objects from user inputs.

Parameters

- **references** (*ReferencePoint* or *dict* or *list*, *optional*) – Will be converted into a list of RefPoints
- **x** (*ndarray*, *optional*) – Parameter vector which should be used for reference point
- **fval** (*float*, *optional*) – Objective function value which should be used for reference point
- **color** (*RGB*A, *optional*) – Color which should be used for reference point.
- **legend** (*str*) – legend text for reference point

Returns **colors** – One for each element in ‘vals’.

Return type list of *RGB*A

```
pypesto.visualize.delete_nan_inf(fvals: numpy.ndarray, x: Optional[numpy.ndarray] = None, xdim: Optional[int] = 1) → Tuple[numpy.ndarray, numpy.ndarray]
```

Delete nan and inf values in *fvals*.

If parameters ‘x’ are passed, also the corresponding entries are deleted.

Parameters

- **x** – array of parameters
- **fvals** – array of *fval*
- **xdim** – dimension of *x*, in case *x* dimension cannot be inferred

Returns

- *x* – array of parameters without nan or inf
- *fvals* – array of *fval* without nan or inf

```
pypesto.visualize.ensemble_crosstab_scatter_lowlevel(dataset: numpy.ndarray, component_labels: Optional[Sequence[str]] = None, **kwargs)
```

Plot cross-classification table of scatter plots for different coordinates.

Lowlevel routine for multiple UMAP and PCA plots, but can also be used to visualize, e.g., parameter traces across optimizer runs.

Parameters

- **dataset** – array of data points to be shown as scatter plot
- **component_labels** – labels for the x-axes and the y-axes

Returns A dictionary of plot axes.

Return type `axs`

```
pypesto.visualize.ensemble_idifiability(ensemble: pypesto.ensemble.ensemble.Ensemble,
                                         ax: Optional[matplotlib.axes._axes.Axes] =
                                         None, size: Optional[Tuple[float]] = (12, 6))
```

Visualize identifiability of parameter ensemble.

Plot an overview about how many parameters hit the parameter bounds based on a ensemble of parameters. confidence intervals/credible ranges are computed via the ensemble mean plus/minus 1 standard deviation. This highlevel routine expects a ensemble object as input.

Parameters

- **ensemble** – ensemble of parameter vectors (from `pypesto.ensemble`)
- **ax** – Axes object to use.
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified

Returns `ax` – The plot axes.

Return type `matplotlib.Axes`

```
pypesto.visualize.ensemble_scatter_lowlevel(dataset, ax: Optional[matplotlib.axes._axes.Axes] =
                                              None, size: Optional[Tuple[float]] = (12, 6), x_label: str = 'component 1',
                                              y_label: str = 'component 2', color_by: Optional[Sequence[float]] = None, color_map:
                                              str = 'viridis', background_color: Tuple[float, float, float] = (0.0, 0.0, 0.0,
                                              1.0), marker_type: str = '.', scatter_size: float = 0.5, invert_scatter_order: bool =
                                              False)
```

Create a scatter plot.

Parameters

- **dataset** – array of data points in reduced dimension
- **ax** – Axes object to use.
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **x_label** – The x-axis label
- **y_label** – The y-axis label
- **color_by** – A sequence/list of floats, which specify the color in the colormap
- **color_map** – A colormap name known to pyplot
- **background_color** – Background color of the axes object (defaults to black)
- **marker_type** – Type of plotted markers
- **scatter_size** – Size of plotted markers
- **invert_scatter_order** – Specifies the order of plotting the scatter points, can be important in case of overplotting

Returns ax – The plot axes.

Return type matplotlib.Axes

```
pypesto.visualize.optimization_run_properties_one_plot(results:  
                                                       pypesto.result.Result,  
                                                       properties_to_plot: Optional[List[str]] = None,  
                                                       size: Tuple[float, float] = (18.5, 10.5), start_indices:  
                                                       Optional[Union[int, Iterable[int]]] = None, colors:  
                                                       Optional[Union[List[float],  
                                                       List[List[float]]]] = None, legends: Optional[Union[str, List[str]]]  
                                                       = None, plot_type:  
                                                       str = 'line') → matplotlib.axes._axes.Axes
```

Plot stats for allproperties specified in properties_to_plot on one plot.

Parameters

- **results** – Optimization result obtained by ‘optimize.py’ or list of those
- **properties_to_plot** – Optimization run properties that should be plotted
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **start_indices** – List of integers specifying the multistarts to be plotted or int specifying up to which start index should be plotted
- **colors** – List of RGBA colors (one color per property in properties_to_plot), or single RGBA color. If not set and one result, clustering is done and colors are assigned automatically
- **legends** – Labels, one label per optimization property
- **plot_type** – Specifies plot type. Possible values: ‘line’ and ‘hist’

Returns The plot axes.

Return type ax

Examples

```
optimization_properties_per_multistart( result1, properties_to_plot=['time'], colors=[.5, .9, .9, .3])
```

```
optimization_properties_per_multistart( result1, properties_to_plot=['time', 'n_grad'], colors=[[.5, .9, .9, .3], [.2, .1, .9, .5]])
```

```
pypesto.visualize.optimization_run_properties_per_multistart(results:
    Union[pypesto.result.Result,
    Sequence[pypesto.result.Result]], properties_to_plot:
    Optional[List[str]] = None, size:
    Tuple[float, float] = (18.5, 10.5),
    start_indices: Optional[Union[int,
    Iterable[int]]] = None, colors: Optional[Union[List[float],
    List[List[float]]]] = None, legends: Optional[Union[str,
    List[str]]] = None, plot_type:
    str = 'line') → Dict[str, matplotlib.axes._subplots.AxesSubplot]
```

One plot per optimization property in properties_to_plot.

Parameters

- **results** – Optimization result obtained by ‘optimize.py’ or list of those
- **properties_to_plot** – Optimization run properties that should be plotted
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **start_indices** – List of integers specifying the multistarts to be plotted or int specifying up to which start index should be plotted
- **colors** – List of RGBA colors (one color per result in results), or single RGBA color. If not set and one result, clustering is done and colors are assigned automatically
- **legends** – Labels for line plots, one label per result object
- **plot_type** – Specifies plot type. Possible values: ‘line’ and ‘hist’

Returns

- *ax*
- *The plot axes.*

Examples

```
optimization_properties_per_multistart( result1, properties_to_plot=['time'], colors=[.5, .9, .9, .3])
optimization_properties_per_multistart( [result1, result2], properties_to_plot=['time'], colors=[[.5, .9, .9, .3], [.2, .1, .9, .5]])
optimization_properties_per_multistart( result1, properties_to_plot=['time', 'n_grad'], colors=[.5, .9, .9, .3])
optimization_properties_per_multistart( [result1, result2], properties_to_plot=['time', 'n_fval'], colors=[[.5, .9, .9, .3], [.2, .1, .9, .5]])
```

```
pypesto.visualize.optimization_run_property_per_multistart(results:
    Union[pypesto.result.Result,
          Sequence[pypesto.result.Result]],
    opt_run_property:
        str, axes: Optional[matplotlib.axes._axes.Axes]
        = None, size: Tuple[float, float]
        = (18.5, 10.5),
    start_indices: Optional[Union[int,
                                  Iterable[int]]]
        = None, colors: Optional[Union[List[float],
                                      List[List[float]]]]
        = None, legends: Optional[Union[str,
                                       List[str]]]
        = None,
    plot_type: str = 'line') → matplotlib.axes._axes.Axes
```

Plot stats for an optimization run property specified by `opt_run_property`.

It is possible to plot a histogram or a line plot. In a line plot, on the x axis are the numbers of the multistarts, where the multistarts are ordered with respect to a function value. On the y axis of the line plot the value of the corresponding parameter for each multistart is displayed.

Parameters

- **opt_run_property** – optimization run property to plot. One of the ‘time’, ‘n_fval’, ‘n_grad’, ‘n_hess’, ‘n_res’, ‘n_sres’
- **results** – Optimization result obtained by ‘optimize.py’ or list of those
- **axes** – Axes object to use
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **start_indices** – List of integers specifying the multistarts to be plotted or int specifying up to which start index should be plotted
- **colors** – List of RGBA colors (one color per result in results), or single RGBA color. If not set and one result, clustering is done and colors are assigned automatically
- **legends** – Labels for line plots, one label per result object
- **plot_type** – Specifies plot type. Possible values: ‘line’, ‘hist’, ‘both’

Returns The plot axes.

Return type ax

```
pypesto.visualize.optimizer_convergence(result: pypesto.result.Result, ax: Optional[matplotlib.axes._axes.Axes] = None, xscale: str = 'symlog',yscale: str = 'log', size: Tuple[float] = (18.5, 10.5)) → matplotlib.axes._axes.Axes
```

Visualize to help spotting convergence issues.

Scatter plot of function values and gradient values at the end of optimization. Optimizer exit-message is encoded by color. Can help identifying convergence issues in optimization and guide tolerance refinement etc.

Parameters

- **result** – Optimization result obtained by ‘optimize.py’
- **ax** – Axes object to use.
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **xscale** – Scale for x-axis
- **yscale** – Scale for y-axis

Returns ax – The plot axes.

Return type matplotlib.Axes

```
pypesto.visualize.optimizer_history(results, ax=None, size=(18.5, 10.5), trace_x='steps', trace_y='fval', scale_y='log10', offset_y=None, colors=None, y_limits=None, start_indices=None, reference=None, legends=None)
```

Plot history of optimizer.

Can plot either the history of the cost function or of the gradient norm, over either the optimizer steps or the computation time.

Parameters

- **results** (pypesto.Result or list) – Optimization result obtained by ‘optimize.py’ or list of those
- **ax** (matplotlib.Axes, optional) – Axes object to use.
- **size** (tuple, optional) – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **trace_x** (str, optional) – What should be plotted on the x-axis? Possibilities: ‘time’, ‘steps’ Default: ‘steps’
- **trace_y** (str, optional) – What should be plotted on the y-axis? Possibilities: ‘fval’, ‘gradnorm’, ‘stepsize’ Default: ‘fval’
- **scale_y** (str, optional) – May be logarithmic or linear (‘log10’ or ‘lin’)
- **offset_y** (float, optional) – Offset for the y-axis-values, as these are plotted on a log10-scale Will be computed automatically if necessary
- **colors** (list, or RGBA, optional) – list of colors, or single color color or list of colors for plotting. If not set, clustering is done and colors are assigned automatically
- **y_limits** (float or ndarray, optional) – maximum value to be plotted on the y-axis, or y-limits

- **start_indices** (*list or int*) – list of integers specifying the multistart to be plotted or int specifying up to which start index should be plotted
- **reference** (*list, optional*) – List of reference points for optimization results, containing at least a function value fval
- **legends** (*list or str*) – Labels for line plots, one label per result object

Returns `ax` – The plot axes.

Return type `matplotlib.Axes`

```
pypesto.visualize.optimizer_history_lowlevel(vals, scale_y='log10', cols=None, ax=None, size=(18.5, 10.5), x_label='Optimizer steps', y_label='Objective value', legend_text=None)
```

Plot optimizer history using list of numpy arrays.

Parameters

- **vals** (*list of numpy arrays*) – list of 2xn-arrays (x_values and y_values of the trace)
- **scale_y** (*str, optional*) – May be logarithmic or linear ('log10' or 'lin')
- **colors** (*list, or RGBA, optional*) – list of colors, or single color color or list of colors for plotting. If not set, clustering is done and colors are assigned automatically
- **ax** (*matplotlib.Axes, optional*) – Axes object to use.
- **size** (*tuple, optional*) – see waterfall
- **x_label** (*str*) – label for x-axis
- **y_label** (*str*) – label for y-axis
- **legend_text** (*str*) – Label for line plots

Returns `ax` – The plot axes.

Return type `matplotlib.Axes`

```
pypesto.visualize.parameter_hist(result: pypesto.result.Result, parameter_name: str, bins: Union[int, str] = 'auto', ax: Optional[matplotlib.Axes] = None, size: Optional[Tuple[float]] = (18.5, 10.5), color: Optional[List[float]] = None, start_indices: Optional[Union[int, List[int]]] = None)
```

Plot parameter values as a histogram.

Parameters

- **result** – Optimization result obtained by 'optimize.py'
- **parameter_name** – The name of the parameter that should be plotted
- **bins** – Specifies bins of the histogram
- **ax** – Axes object to use
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **color** – RGBA color.
- **start_indices** – List of integers specifying the multistarts to be plotted or int specifying up to which start index should be plotted

Returns The plot axes.

Return type ax

```
pypesto.visualize.parameters(results: Union[pypesto.result.Result, Sequence[pypesto.result.Result]], ax: Optional[matplotlib.axes._axes.Axes] = None, parameter_indices: Union[str, Sequence[int]] = 'free_only', lb: Optional[Union[numpy.ndarray, List[float]]] = None, ub: Optional[Union[numpy.ndarray, List[float]]] = None, size: Optional[Tuple[float, float]] = None, reference: Optional[List[pypesto.visualize.reference_points.ReferencePoint]] = None, colors: Optional[Union[List[float], List[List[float]]]] = None, legends: Optional[Union[str, List[str]]] = None, balance_alpha: bool = True, start_indices: Optional[Union[int, Iterable[int]]] = None, scale_to_interval: Optional[Tuple[float, float]] = None) → matplotlib.axes._axes.Axes
```

Plot parameter values.

Parameters

- **results** – Optimization result obtained by ‘optimize.py’ or list of those
- **ax** – Axes object to use.
- **parameter_indices** – Specifies which parameters should be plotted. Allowed string values are ‘all’ (both fixed and free parameters will be plotted) and ‘free_only’ (only free parameters will be plotted)
- **lb** – If not None, override result.problem.lb, problem.problem.ub. Dimension either result.problem.dim or result.problem.dim_full.
- **ub** – If not None, override result.problem.lb, problem.problem.ub. Dimension either result.problem.dim or result.problem.dim_full.
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **reference** – List of reference points for optimization results, containing at least a function value fval
- **colors** – list of RGBA colors, or single RGBA color If not set, clustering is done and colors are assigned automatically
- **legends** – Labels for line plots, one label per result object
- **balance_alpha** – Flag indicating whether alpha for large clusters should be reduced to avoid overplotting (default: True)
- **start_indices** – list of integers specifying the multistarts to be plotted or int specifying up to which start index should be plotted
- **scale_to_interval** – Tuple of bounds to which to scale all parameter values and bounds, or None to use bounds as determined by lb, ub.

Returns The plot axes.

Return type ax

```
pypesto.visualize.parameters_lowlevel(xs: Sequence[Union[numpy.ndarray, List[float]]],  
                                      fvals: Union[numpy.ndarray, List[float]], lb: Optional[Union[numpy.ndarray, List[float]]] = None,  
                                      ub: Optional[Union[numpy.ndarray, List[float]]] = None, x_labels: Optional[Iterable[str]] = None, ax:  
                                      Optional[matplotlib.axes._axes.Axes] = None, size:  
                                      Optional[Tuple[float, float]] = None, colors: Optional[Sequence[Union[numpy.ndarray, List[float]]]]  
                                      = None, linestyle: str = '-', legend_text: Optional[str] = None, balance_alpha: bool = True) → matplotlib.axes._axes.Axes
```

Plot parameters plot using list of parameters.

Parameters

- **xs** – Including optimized parameters for each startpoint. Shape: (n_starts, dim).
- **fvals** – Function values. Needed to assign cluster colors.
- **lb** – The lower and upper bounds.
- **ub** – The lower and upper bounds.
- **x_labels** – Labels to be used for the parameters.
- **ax** – Axes object to use.
- **size** – see parameters
- **colors** – One for each element in ‘fvals’.
- **linestyle** – linestyle argument for parameter plot
- **legend_text** – Label for line plots
- **balance_alpha** – Flag indicating whether alpha for large clusters should be reduced to avoid overplotting (default: True)

Returns The plot axes.

Return type ax

```
pypesto.visualize.process_offset_y(offset_y: Optional[float], scale_y: str, min_val: float) → float
```

Compute offset for y-axis, depend on user settings.

Parameters

- **offset_y** – value for offsetting the later plotted values, in order to ensure positivity if a semilog-plot is used
- **scale_y** – Can be ‘lin’ or ‘log10’, specifying whether values should be plotted on linear or on log10-scale
- **min_val** – Smallest value to be plotted

Returns offset_y – value for offsetting the later plotted values, in order to ensure positivity if a semilog-plot is used

Return type float

```
pypesto.visualize.process_result_list(results, colors=None, legends=None)
```

Assign colors and legends to a list of results, check user provided lists.

Parameters

- **results** (*list* or `pypesto.Result`) – list of `pypesto.Result` objects or a single `pypesto.Result`
- **colors** (*list*, *optional*) – list of RGBA colors
- **legends** (*str* or *list*) – labels for line plots

Returns

- **results** (*list of pypesto.Result*) – list of `pypesto.Result` objects
- **colors** (*list of RGBA*) – One for each element in ‘results’.
- **legends** (*list of str*) – labels for line plots

`pypesto.visualize.process_y_limits(ax, y_limits)`

Apply user specified limits of y-axis.

Parameters

- **ax** (`matplotlib.Axes`, *optional*) – Axes object to use.
- **y_limits** (`ndarray`) – y_limits, minimum and maximum, for current axes object

Returns `ax` – Axes object to use.**Return type** `matplotlib.Axes`, optional`pypesto.visualize.profile_cis(result: pypesto.result.Result, confidence_level: float = 0.95, profile_indices: Optional[Sequence[int]] = None, profile_list: int = 0, color: Union[str, tuple] = 'C0', show_bounds: bool = False, ax: Optional[matplotlib.axes._axes.Axes] = None) → matplotlib.axes._axes.Axes`

Plot approximate confidence intervals based on profiles.

Parameters

- **result** – The result object after profiling.
- **confidence_level** – The confidence level in (0,1), which is translated to an approximate threshold assuming a chi2 distribution, using `pypesto.profile.chi2_quantile_to_ratio`.
- **profile_indices** – List of integer values specifying which profiles should be plotted. Defaults to the indices for which profiles were generated in profile list `profile_list`.
- **profile_list** – Index of the profile list to be used.
- **color** – Main plot color.
- **show_bounds** – Whether to show, and extend the plot to, the lower and upper bounds.
- **ax** – Axes object to use. Default: Create a new one.

`pypesto.visualize.profile_lowlevel(fvals, ax=None, size: Tuple[float, float] = (18.5, 6.5), color=None, legend_text: Optional[str] = None, show_bounds: bool = False, lb: Optional[float] = None, ub: Optional[float] = None)`

Lowlevel routine for plotting one profile, working with a numpy array only.

Parameters

- **fvals** (*numeric list or array*) – Values to plot.
- **ax** (`matplotlib.Axes`, *optional*) – Axes object to use.
- **size** (`tuple`, *optional*) – Figure size (width, height) in inches. Is only applied when no ax object is specified.

- **color** (*RGB*A, *optional*) – Color for profiles in plot.
- **legend_text** (*str*) – Label for line plots.
- **show_bounds** – Whether to show, and extend the plot to, the lower and upper bounds.
- **lb** – Lower bound.
- **ub** – Upper bound.

Returns `ax` – The plot axes.

Return type `matplotlib.Axes`

```
pypesto.visualize.profiles(results: Union[pypesto.result.Result, Sequence[pypesto.result.Result]], ax=None, file_indices: Optional[Sequence[int]] = None, size: Sequence[float] = (18.5, 6.5), reference: Optional[Union[pypesto.visualize.reference_points.ReferencePoint, Sequence[pypesto.visualize.reference_points.ReferencePoint]]] = None, colors=None, legends: Optional[Sequence[str]] = None, x_labels: Optional[Sequence[str]] = None, profile_list_ids: Union[int, Sequence[int]] = 0, ratio_min: float = 0.0, show_bounds: bool = False)
```

Plot classical 1D profile plot.

Using the posterior, e.g. Gaussian like profile.

Parameters

- **results** (*list* or `pypesto.Result`) – List of or single `pypesto.Result` after profiling.
- **ax** (*list of matplotlib.Axes, optional*) – List of axes objects to use.
- **profile_indices** (*list of integer values*) – List of integer values specifying which profiles should be plotted.
- **size** (*tuple, optional*) – Figure size (width, height) in inches. Is only applied when no ax object is specified.
- **reference** (*list, optional*) – List of reference points for optimization results, containing at least a function value fval.
- **colors** (*list, or RGB*A, *optional*) – List of colors, or single color.
- **legends** (*list or str, optional*) – Labels for line plots, one label per result object.
- **x_labels** (*list of str*) – Labels for parameter value axes (e.g. parameter names).
- **profile_list_ids** (*int or list of ints, optional*) – Index or list of indices of the profile lists to be used for profiling.
- **ratio_min** – Minimum ratio below which to cut off.
- **show_bounds** – Whether to show, and extend the plot to, the lower and upper bounds.

Returns `ax` – The plot axes.

Return type `matplotlib.Axes`

```
pypesto.visualize.profiles_lowlevel(fvals, ax=None, size: Tuple[float, float] = (18.5,
    6.5), color=None, legend_text: Optional[str] =
    None, x_labels=None, show_bounds: bool = False,
    lb_full=None, ub_full=None)
```

Lowlevel routine for profile plotting.

Working with a list of arrays only, opening different axes objects in case.

Parameters

- **fvals** (*numeric list or array*) – Values to plot.
- **ax** (*list of matplotlib.Axes, optional*) – List of axes object to use.
- **size** (*tuple, optional*) – Figure size (width, height) in inches. Is only applied when no ax object is specified.
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified.
- **color** (*RGBA, optional*) – Color for profiles in plot.
- **legend_text** (*List[str]*) – Label for line plots.
- **legend_text** – Label for line plots.
- **show_bounds** – Whether to show, and extend the plot to, the lower and upper bounds.
- **lb_full** – Lower bound.
- **ub_full** – Upper bound.

Returns **ax** – The plot axes.

Return type matplotlib.Axes

```
pypesto.visualize.projection_scatter_pca(pca_coordinates: numpy.ndarray, components:
    Sequence[int] = (0, 1), **kwargs)
```

Plot a scatter plot for PCA coordinates.

Creates either one or multiple scatter plots, depending on the number of coordinates passed to it.

Parameters

- **pca_coordinates** – array of pca coordinates (returned as first output by the routine get_pca_representation) to be shown as scatter plot
- **components** – Components to be plotted (corresponds to columns of pca_coordinates)

Returns Either one axes object, or a dictionary of plot axes (depending on the number of coordinates passed)

Return type axs

```
pypesto.visualize.projection_scatter_umap(umap_coordinates: numpy.ndarray, compo-
    nents: Sequence[int] = (0, 1), **kwargs)
```

Plot a scatter plots for UMAP coordinates.

Creates either one or multiple scatter plots, depending on the number of coordinates passed to it.

Parameters

- **umap_coordinates** – array of umap coordinates (returned as first output by the routine get_umap_representation) to be shown as scatter plot
- **components** – Components to be plotted (corresponds to columns of umap_coordinates)

Returns Either one axes object, or a dictionary of plot axes (depending on the number of coordinates passed)

Return type axs

```
pypesto.visualize.projection_scatter_umap_original(umap_object: None, color_by: Optional[Sequence[float]] = None, components: Sequence[int] = (0, 1), **kwargs)
```

See *projection_scatter_umap* for more documentation.

Wrapper around umap.plot.points. Similar to *projection_scatter_umap*, but uses the original plotting routine from umap.plot.

Parameters

- **umap_object** – umap object (returned as second output by `get_umap_representation`) to be shown as scatter plot
- **color_by** – A sequence/list of floats, which specify the color in the colormap
- **components** – Components to be plotted (corresponds to columns of `umap_coordinates`)

Returns ax – The plot axes.

Return type matplotlib.Axes

```
pypesto.visualize.sampling_1d_marginals(result: pypesto.result.Result, i_chain: int = 0, par_indices: Optional[Sequence[int]] = None, stepsize: int = 1, plot_type: str = 'both', bw: str = 'scott', suptitle: Optional[str] = None, size: Optional[Tuple[float, float]] = None)
```

Plot marginals.

Parameters

- **result** – The pyPESTO result object with filled sample result.
- **i_chain** – Which chain to plot. Default: First chain.
- **par_indices** (*list of integer values*) – List of integer values specifying which parameters to plot. Default: All parameters are shown.
- **stepsize** – Only one in `stepsize` values is plotted.
- **plot_type** ({'hist' / 'kde' / 'both'}) – Specify whether to plot a histogram ('hist'), a kernel density estimate ('kde'), or both ('both').
- **bw** ({'scott', 'silverman' / scalar / pair of scalars}) – Kernel bandwidth method.
- **suptitle** – Figure super title.
- **size** – Figure size in inches.

Returns matplotlib-axes

Return type ax

```
pypesto.visualize.sampling_fval_traces(result: pypesto.result.Result, i_chain: int = 0, full_trace: bool = False, stepsize: int = 1, title: Optional[str] = None, size: Optional[Tuple[float, float]] = None, ax: Optional[matplotlib.axes._axes.Axes] = None)
```

Plot log-posterior (=function value) over iterations.

Parameters

- **result** – The pyPESTO result object with filled sample result.

- **i_chain** – Which chain to plot. Default: First chain.
- **full_trace** – Plot the full trace including warm up. Default: False.
- **stepsize** – Only one in *stepsize* values is plotted.
- **title** – Axes title.
- **size** (*ndarray*) – Figure size in inches.
- **ax** – Axes object to use.

Returns The plot axes.

Return type ax

```
pypesto.visualize.sampling_parameter_cis(result: pypesto.result.Result, alpha: Optional[Sequence[int]] = None, step: float = 0.05, show_median: bool = True, title: Optional[str] = None, size: Optional[Tuple[float, float]] = None, ax: Optional[matplotlib.axes._axes.Axes] = None) → matplotlib.axes._axes.Axes
```

Plot MCMC-based parameter credibility intervals.

Parameters

- **result** – The pyPESTO result object with filled sample result.
- **alpha** – List of lower tail probabilities, defaults to 95% interval.
- **step** – Height of boxes for projectile plot, defaults to 0.05.
- **show_median** – Plot the median of the MCMC chain. Default: True.
- **title** – Axes title.
- **size** (*ndarray*) – Figure size in inches.
- **ax** – Axes object to use.

Returns The plot axes.

Return type ax

```
pypesto.visualize.sampling_parameter_traces(result: pypesto.result.Result, i_chain: int = 0, par_indices: Optional[Sequence[int]] = None, full_trace: bool = False, stepsize: int = 1, use_problem_bounds: bool = True, subtitle: Optional[str] = None, size: Optional[Tuple[float, float]] = None, ax: Optional[matplotlib.axes._axes.Axes] = None)
```

Plot parameter values over iterations.

Parameters

- **result** – The pyPESTO result object with filled sample result.
- **i_chain** – Which chain to plot. Default: First chain.
- **par_indices** (*list of integer values*) – List of integer values specifying which parameters to plot. Default: All parameters are shown.
- **full_trace** – Plot the full trace including warm up. Default: False.
- **stepsize** – Only one in *stepsize* values is plotted.

- **use_problem_bounds** – Defines if the y-limits shall be the lower and upper bounds of parameter estimation problem.
- **suptitle** – Figure suptitle.
- **size** – Figure size in inches.
- **ax** – Axes object to use.

Returns The plot axes.

Return type ax

```
pypesto.visualize.sampling_prediction_trajectories(ensemble_prediction:  
    pypesto.ensemble.ensemble.EnsemblePrediction,  
    levels: Union[float, Sequence[float]], title: Optional[str] = None, size:  
    Optional[Tuple[float, float]] = None, axes: Optional[matplotlib.axes._axes.Axes]  
    = None, labels: Optional[Dict[str, str]] = None, axis_label_padding:  
    int = 50, groupby: str = 'condition', condition_gap:  
    float = 0.01, condition_ids:  
    Optional[Sequence[str]] = None, output_ids: Optional[Sequence[str]] = None,  
    weighting: bool = False) → matplotlib.axes._axes.Axes
```

Visualize prediction trajectory of an EnsemblePrediction.

Plot MCMC-based prediction credibility intervals for the model states or outputs. One or various credibility levels can be depicted. Plots are grouped by condition.

Parameters

- **result** – The pyPESTO result object with filled sample result.
- **levels** – Credibility levels, e.g. [95] for a 95% credibility interval. See the `_get_level_percentiles()` method for a description of how these levels are handled, and current limitations.
- **title** – Axes title.
- **size (ndarray)** – Figure size in inches.
- **axes** – Axes object to use.
- **labels** – Keys should be ensemble output IDs, values should be the desired label for that output. Defaults to output IDs.
- **axis_label_padding** – Pixels between axis labels and plots.
- **groupby** – Group plots by `pypesto.predict.constants.OUTPUT` or `pypesto.predict.constants.CONDITION`.
- **condition_gap** – Gap between conditions when `groupby == pypesto.predict.constants.CONDITION`.
- **condition_ids** – If provided, only data for the provided condition IDs will be plotted.
- **output_ids** – If provided, only data for the provided output IDs will be plotted.

- **weighting** – Whether weights should be used for trajectory.

Returns The plot axes.

Return type axes

```
pypesto.visualize.sampling_scatter(result: pypesto.result.Result, i_chain: int = 0, stepsize: int
                                    = 1, suptitle: Optional[str] = None, diag_kind: str = 'kde',
                                    size: Optional[Tuple[float, float]] = None)
```

Parameter scatter plot.

Parameters

- **result** – The pyPESTO result object with filled sample result.
- **i_chain** – Which chain to plot. Default: First chain.
- **stepsize** – Only one in *stepsize* values is plotted.
- **suptitle** – Figure super title.
- **diag_kind** – Visualization mode for marginal densities {‘auto’, ‘hist’, ‘kde’, None}
- **size** – Figure size in inches.

Returns The plot axes.

Return type ax

```
pypesto.visualize.waterfall(results: Union[pypesto.result.Result,
                                             Sequence[pypesto.result.Result]], ax: Optional[matplotlib.axes._axes.Axes] = None, size: Optional[Tuple[float]] = (18.5, 10.5), y_limits: Optional[Tuple[float]] = None, scale_y: Optional[str] = 'log10', offset_y: Optional[float] = None, start_indices: Optional[Union[Sequence[int], int]] = None, reference: Optional[Sequence[pypesto.visualize.reference_points.ReferencePoint]] = None, colors: Optional[Union[Tuple[float, float, float, float], Sequence[Tuple[float, float, float, float]]]] = None, legends: Optional[Union[Sequence[str], str]] = None)
```

Plot waterfall plot.

Parameters

- **results** – Optimization result obtained by ‘optimize.py’ or list of those
- **ax** (*matplotlib.Axes*, *optional*) – Axes object to use.
- **size** – Figure size (width, height) in inches. Is only applied when no ax object is specified
- **y_limits** (*float* or *ndarray*, *optional*) – maximum value to be plotted on the y-axis, or y-limits
- **scale_y** – May be logarithmic or linear (‘log10’ or ‘lin’)
- **offset_y** – offset for the y-axis, if it is supposed to be in log10-scale
- **start_indices** – Integers specifying the multistart to be plotted or int specifying up to which start index should be plotted
- **reference** – Reference points for optimization results, containing at least a function value *fval*
- **colors** – Colors or single color for plotting. If not set, clustering is done and colors are assigned automatically

- **legends** – Labels for line plots, one label per result object

Returns ax – The plot axes.

Return type matplotlib.Axes

```
pypesto.visualize.waterfall_lowlevel(fvals, scale_y='log10', offset_y=0.0, ax=None, size=(18.5, 10.5), colors=None, legend_text=None)
```

Plot waterfall plot using list of function values.

Parameters

- **fvals** (*numeric list or array*) – Including values need to be plotted.
- **scale_y** (*str, optional*) – May be logarithmic or linear ('log10' or 'lin')
- **offset_y** – offset for the y-axis, if it is supposed to be in log10-scale
- **ax** (*matplotlib.Axes, optional*) – Axes object to use.
- **size** (*tuple, optional*) – see waterfall
- **colors** (*list, or RGBA, optional*) – list of colors, or single color color or list of colors for plotting. If not set, clustering is done and colors are assigned automatically
- **legend_text** (*str*) – Label for line plots

Returns ax – The plot axes.

Return type matplotlib.Axes

4.11 Engines

The execution of the multistarts can be parallelized in different ways, e.g. multi-threaded or cluster-based. Note that it is not checked whether a single task itself is internally parallelized.

```
class pypesto.engine.Engine
```

Bases: abc.ABC

Abstract engine base class.

```
__init__()
```

Initialize self. See help(type(self)) for accurate signature.

```
abstract execute(tasks: List[pypesto.engine.task.Task], progress_bar: bool = True)
```

Execute tasks.

Parameters

- **tasks** – List of tasks to execute.
- **progress_bar** – Whether to display a progress bar.

```
class pypesto.engine.MultiprocessEngine(n_procs: Optional[int] = None)
```

Bases: pypesto.engine.base.Engine

Parallelize the task execution using multiprocessing.

Parameters **n_procs** – The maximum number of processes to use in parallel. Defaults to the number of CPUs available on the system according to *os.cpu_count()*. The effectively used number of processes will be the minimum of *n_procs* and the number of tasks submitted.

```
__init__(n_procs: Optional[int] = None)
```

Initialize self. See help(type(self)) for accurate signature.

execute (*tasks*: *List[pypesto.engine.task.Task]*, *progress_bar*: *bool* = *True*)
Pickle tasks and distribute work over parallel processes.

Parameters

- **tasks** – List of tasks to execute.
- **progress_bar** – Whether to display a progress bar.

class pypesto.engine.**MultiThreadEngine** (*n_threads*: *Optional[int]* = *None*)
Bases: pypesto.engine.base.Engine

Parallelize the task execution using multithreading.

Parameters **n_threads** – The maximum number of threads to use in parallel. Defaults to the number of CPUs available on the system according to *os.cpu_count()*. The effectively used number of threads will be the minimum of *n_threads* and the number of tasks submitted.

__init__ (*n_threads*: *Optional[int]* = *None*)
Initialize self. See help(type(self)) for accurate signature.

execute (*tasks*: *List[pypesto.engine.task.Task]*, *progress_bar*: *bool* = *True*)
Deepcopy tasks and distribute work over parallel threads.

Parameters

- **tasks** – List of tasks to execute.
- **progress_bar** – Whether to display a progress bar.

class pypesto.engine.**SingleCoreEngine**
Bases: pypesto.engine.base.Engine

Dummy engine for sequential execution on one core.

Note that the objective itself may be multithreaded.

__init__ ()
Initialize self. See help(type(self)) for accurate signature.

execute (*tasks*: *List[pypesto.engine.task.Task]*, *progress_bar*: *bool* = *True*)
Execute all tasks in a simple for loop sequentially.

Parameters

- **tasks** – List of tasks to execute.
- **progress_bar** – Whether to display a progress bar.

class pypesto.engine.**Task**
Bases: abc.ABC

Abstract Task class.

A task is one of a list of independent execution tasks that are submitted to the execution engine to be executed using the `execute()` method, commonly in parallel.

__init__ ()
Initialize self. See help(type(self)) for accurate signature.

abstract execute ()
Execute the task and return its results.

4.12 Startpoint

Methods for selecting points that can be used as startpoints for multi-start optimization. Startpoint methods can be implemented by deriving from `pypesto.startpoint.StartpointMethod`. Handling in pypesto is then wrapped in `pypesto.startpoint.assign_startpoints()`, handling e.g. non-requirement of startpoints e.g. for global methods, and re-sampling of non-finite points.

`class pypesto.startpoint.FunctionStartpoints(function: Callable)`

Bases: `pypesto.startpoint.base.StartpointMethod`

Define startpoints via callable.

The callable should take the same arguments as the `__call__` method.

`__call__(n_starts: int, lb: numpy.ndarray, ub: numpy.ndarray, objective: pypesto.objective.base.ObjectiveBase) → numpy.ndarray`

Call function.

`__init__(function: Callable)`

Initialize.

Parameters `function` – (The callable sampling startpoints.) –

`class pypesto.startpoint.LatinHypercubeStartpoints(smooth: bool = True)`

Bases: `pypesto.startpoint.base.StartpointMethod`

Generate latin hypercube-sampled startpoints.

See e.g. https://en.wikipedia.org/wiki/Latin_hypercube_sampling.

`__call__(n_starts: int, lb: numpy.ndarray, ub: numpy.ndarray, objective: Optional[pypesto.objective.base.ObjectiveBase] = None) → numpy.ndarray`

Call function.

`__init__(smooth: bool = True)`

Initialize.

Parameters `smooth` – Whether a (uniformly chosen) random starting point within the hypercube $[i/n_{\text{starts}}, (i+1)/n_{\text{starts}}]$ should be chosen (True) or the midpoint of the interval (False).

`class pypesto.startpoint.StartpointMethod`

Bases: `object`

Startpoint generation, in particular for multi-start optimization.

Abstract base class, specific sampling method needs to be defined in sub-classes.

`abstract __call__(n_starts: int, lb: numpy.ndarray, ub: numpy.ndarray, objective: pypesto.objective.base.ObjectiveBase) → numpy.ndarray`

Generate startpoints.

Parameters

- `n_starts` – Number of starts.
- `lb` – Lower parameter bound.
- `ub` – Upper parameter bound.
- `objective` – Objective, maybe required for evaluation.

Returns Startpoints, shape $(n_{\text{starts}}, n_{\text{par}})$.

Return type startpoints

```
class pypesto.startpoint.UniformStartpoints
Bases: pypesto.startpoint.base.StartpointMethod

Generate uniformly sampled startpoints.

__call__(n_starts: int, lb: numpy.ndarray, ub: numpy.ndarray, objective: Optional[pypesto.objective.base.ObjectiveBase] = None) → numpy.ndarray
Call function.
```

```
pypesto.startpoint.assign_startpoints(n_starts: int, startpoint_method: Union[pypesto.startpoint.base.StartpointMethod, Callable], problem: pypesto.problem.Problem, startpoint_resample: bool) → numpy.ndarray
```

Assign startpoints for a given problem.

This is the main method called e.g. by *pypesto.optimize.minimize*.

Parameters

- **n_starts** – Number of startpoints to generate.
- **startpoint_method** – Startpoint generation method to use.
- **problem** – Underlying problem specifying e.g. dimensions and bounds.
- **startpoint_resample** – Whether to evaluate function values at proposed startpoints, and resample ones having non-finite values until all startpoints have finite value.

Returns Startpoints, shape (n_starts, n_par).

Return type startpoints

```
pypesto.startpoint.to_startpoint_method(maybe_startpoint_method: Union[pypesto.startpoint.base.StartpointMethod, Callable]) → pypesto.startpoint.base.StartpointMethod
```

Create StartpointMethod instance if possible, otherwise raise.

Parameters **maybe_startpoint_method** – A StartpointMethod instance, or a Callable as expected by FunctionStartpoints.

Returns A StartpointMethod instance.

Return type startpoint_method

Raises **TypeError** if arguments cannot be converted to a StartpointMethod. –

4.13 Storage

Saving and loading traces and results objects.

```
class pypesto.store.OptimizationResultHDF5Reader(storage_filename: str)
Bases: object
```

Reader of the HDF5 result files written by OptimizationResultHDF5Writer.

storage_filename
HDF5 result file name

```
__init__(storage_filename: str)
Initialize reader.
```

Parameters **storage_filename** (*str*) – HDF5 result file name

```
read() → pypesto.result.Result
    Read HDF5 result file and return pyPESTO result object.

class pypesto.store.OptimizationResultHDF5Writer(storage_filename: str)
    Bases: object
    Writer of the HDF5 result files.

    storage_filename
        HDF5 result file name

    __init__(storage_filename: str)
        Initialize Writer.

        Parameters storage_filename (str) – HDF5 result file name

    write(result: pypesto.result.Result, overwrite=False)
        Write HDF5 result file from pyPESTO result object.

class pypesto.store.ProblemHDF5Reader(storage_filename: str)
    Bases: object
    Reader of the HDF5 problem files written by ProblemHDF5Writer.

    storage_filename
        HDF5 problem file name

    __init__(storage_filename: str)
        Initialize reader.

        Parameters storage_filename (str) – HDF5 problem file name

    read(objective: Optional[pypesto.objective.base.ObjectiveBase] = None) → pypesto.problem.Problem
        Read HDF5 problem file and return pyPESTO problem object.

        Parameters objective – Objective function which is currently not saved to storage.

        Returns A problem instance with all attributes read in.

        Return type problem

class pypesto.store.ProblemHDF5Writer(storage_filename: str)
    Bases: object
    Writer of the HDF5 problem files.

    storage_filename
        HDF5 result file name

    __init__(storage_filename: str)
        Initialize writer.

        Parameters storage_filename (str) – HDF5 problem file name

    write(problem, overwrite: bool = False)
        Write HDF5 problem file from pyPESTO problem object.

class pypesto.store.ProfileResultHDF5Reader(storage_filename: str)
    Bases: object
    Reader of the HDF5 result files written by OptimizationResultHDF5Writer.

    storage_filename
        HDF5 result file name
```

`__init__(storage_filename: str)`
Initialize reader.

Parameters `storage_filename` – HDF5 result file name

`read() → pypesto.result.Result`
Read HDF5 result file and return pyPESTO result object.

`class pypesto.store.ProfileResultHDF5Writer(storage_filename: str)`
Bases: `object`

Writer of the HDF5 result files.

`storage_filename`
HDF5 result file name

`__init__(storage_filename: str)`
Initialize Writer.

Parameters `storage_filename (str)` – HDF5 result file name

`write(result: pypesto.result.Result, overwrite: bool = False)`
Write HDF5 result file from pyPESTO result object.

`class pypesto.store.SamplingResultHDF5Reader(storage_filename: str)`
Bases: `object`

Reader of the HDF5 result files written by SamplingResultHDF5Writer.

`storage_filename`
HDF5 result file name

`__init__(storage_filename: str)`
Initialize reader.

Parameters `storage_filename (str)` – HDF5 result file name

`read() → pypesto.result.Result`
Read HDF5 result file and return pyPESTO result object.

`class pypesto.store.SamplingResultHDF5Writer(storage_filename: str)`
Bases: `object`

Writer of the HDF5 sampling files.

`storage_filename`
HDF5 result file name

`__init__(storage_filename: str)`
Initialize Writer.

Parameters `storage_filename (str)` – HDF5 result file name

`write(result: pypesto.result.Result, overwrite: bool = False)`
Write HDF5 sampling file from pyPESTO result object.

`pypesto.store.get_or_create_group(f: Union[h5py._hl.files.File, h5py._hl.group.Group], group_path: str) → h5py._hl.group.Group`
Return/create a group object for the group with group_path relative to f.

`pypesto.store.f`
should be checked

Type file or group where existence of a group with the path group_path

`pypesto.store.group_path`

Type the path or simply the name of the group that should exist in f

Returns hdf5 group object with specified path relative to f.

Return type grp

`pypesto.store.load_objective_config(filename: str)`

Load the objective information stored in f.

Parameters `filename` – The name of the file in which the information are stored.

Returns

- A *dictionary of the information, stored instead of the actual objective in problem.objective.*

`pypesto.store.optimization_result_from_history(filename: str) → pypesto.result.Result`

Convert a saved hdf5 History to an optimization result.

Used for interrupted optimization runs.

Parameters `filename` – The name of the file in which the information are stored.

Returns

- A *result object in which the optimization result is constructed from history. But missing “Time, Message and Exitflag” keys.*

`pypesto.store.read_result(filename: str, problem: bool = True, optimize: bool = False, profile: bool = False, sample: bool = False) → pypesto.result.Result`

Save the whole pypesto.Result object in an HDF5 file.

Parameters

- `filename` – The HDF5 filename.
- `problem` – Read the problem.
- `optimize` – Read the optimize result.
- `profile` – Read the profile result.
- `sample` – Read the sample result.

Returns Result object containing the results stored in HDF5 file.

Return type result

`pypesto.store.write_array(f: h5py._hl.group.Group, path: str, values: Collection) → None`

Write array to hdf5.

Parameters

- `f` – h5py.Group where dataset should be created
- `path` – path of the dataset to create
- `values` – array to write

`pypesto.store.write_result(result: pypesto.result.Result, filename: str, overwrite: bool = False, problem: bool = True, optimize: bool = False, profile: bool = False, sample: bool = False)`

Save whole pypesto.Result to hdf5 file.

Boolean indicators allow specifying what to save.

Parameters

- **result** – The `pypesto.Result` object to be saved.
- **filename** – The HDF5 filename.
- **overwrite** – Boolean, whether already existing results should be overwritten.
- **problem** – Read the problem.
- **optimize** – Read the optimize result.
- **profile** – Read the profile result.
- **sample** – Read the sample result.

4.14 Logging

Logging convenience functions.

```
pypesto.logging.log(name: str = 'pypesto', level: int = 20, console: bool = True, filename: str = '')
```

Log messages from *name* with *level* to any combination of console/file.

Parameters

- **name** – The name of the logger.
- **level** – The output level to use.
- **console** – If True, messages are logged to console.
- **filename** – If specified, messages are logged to a file with this name.

```
pypesto.logging.log_to_console(level: int = 20)
```

Log to console.

Parameters the log method. (See) –

```
pypesto.logging.log_to_file(level: int = 20, filename: str = '.pypesto_logging.log')
```

Log to file.

Parameters the log method. (See) –

4.15 Ensemble

```
class pypesto.ensemble.Ensemble(x_vectors: numpy.ndarray, x_names: Optional[Sequence[str]] = None, vector_tags: Optional[Sequence[Tuple[int, int]]] = None, ensemble_type: Optional[pypesto.ensemble.constants.EnsembleType] = None, predictions: Optional[Sequence[pypesto.ensemble.ensemble.EnsemblePrediction]] = None, lower_bound: Optional[numumpy.ndarray] = None, upper_bound: Optional[numumpy.ndarray] = None)
```

Bases: `object`

An ensemble is a wrapper around a numpy array.

It comes with some convenience functionality: It allows to map parameter values via identifiers to the correct parameters, it allows to compute summaries of the parameter vectors (mean, standard deviation, median, percentiles) more easily, and it can store predictions made by pyPESTO, such that the parameter ensemble and the predictions are linked to each other.

```
__init__(x_vectors: numpy.ndarray, x_names: Optional[Sequence[str]] = None, vector_tags: Optional[Sequence[Tuple[int, int]]] = None, ensemble_type: Optional[pypesto.ensemble.constants.EnsembleType] = None, predictions: Optional[Sequence[pypesto.ensemble.ensemble.EnsemblePrediction]] = None, lower_bound: Optional[numumpy.ndarray] = None, upper_bound: Optional[numumpy.ndarray] = None)
```

Initialize.

Parameters

- **x_vectors** – parameter vectors of the ensemble, in the format n_parameter x n_vectors
- **x_names** – Names or identifiers of the parameters
- **vector_tags** – Additional tag, which adds information about the the parameter vectors of the form (optimization_run, optimization_step) if the ensemble is created from an optimization result or (sampling_chain, sampling_step) if the ensemble is created from a sampling result.
- **ensemble_type** – Type of ensemble: Ensemble (default), sample, or unprocessed_chain Samples are meant to be representative, ensembles can be any ensemble of parameters, and unprocessed chains still have burn-ins
- **predictions** – List of EnsemblePrediction objects
- **lower_bound** – array of potential lower bounds for the parameters
- **upper_bound** – array of potential upper bounds for the parameters

```
check_identifiability() → pandas.core.frame.DataFrame
```

Check identifiability of ensemble.

Use ensemble mean and standard deviation to assess (in a rudimentary way) whether or not parameters are identifiable. Returns a dataframe with tuples, which specify whether or not the lower and the upper bounds are violated.

Returns DataFrame indicating parameter identifiability based on mean plus/minus standard deviations and parameter bounds

Return type parameter_identifiability

```
compute_summary(percentiles_list: Sequence[int] = (5, 20, 80, 95))
```

Compute summary for the parameters of the ensemble.

Summary includes the mean, the median, the standard deviation and possibly percentiles. Those summary results are added as a data member to the EnsemblePrediction object.

Parameters **percentiles_list** – List or tuple of percent numbers for the percentiles

Returns Dict with mean, std, median, and percentiles of parameter vectors

Return type summary

```
static from_optimization_endpoints(result: pypesto.result.Result, cutoff: float = inf, max_size: int = inf, **kwargs)
```

Construct an ensemble from an optimization result.

Parameters

- **result** – A pyPESTO result that contains an optimization result.

- **cutoff** – Exclude parameters from the optimization if the nllh is higher than the *cutoff*.
- **max_size** – The maximum size the ensemble should be.

Returns**Return type** The ensemble.

```
static from_optimization_history(result: pypesto.result.Result, cutoff: float = inf,  
                                max_size: int = inf, max_per_start: int = inf, distribute:  
                                bool = True, **kwargs)
```

Construct an ensemble from the history of an optimization.

Parameters

- **result** – A pyPESTO result that contains an optimization result with history recorded.
- **cutoff** – Exclude parameters from the optimization if the nllh is higher than the *cutoff*.
- **max_size** – The maximum size the ensemble should be.
- **max_per_start** – The maximum number of vectors to be included from a single optimization start.
- **distribute** – Boolean flag, whether the best (False) values from the start should be taken or whether the indices should be more evenly distributed.

Returns**Return type** The ensemble.

```
static from_sample(result: pypesto.result.Result, remove_burn_in: bool = True, chain_slice:  
                        Optional[slice] = None, x_names: Optional[Sequence[str]] = None,  
                        lower_bound: Optional[numumpy.ndarray] = None, upper_bound: Optional[numumpy.ndarray] = None, **kwargs)
```

Construct an ensemble from a sample.

Parameters

- **result** – A pyPESTO result that contains a sample result.
- **remove_burn_in** – Exclude parameter vectors from the ensemble if they are in the “burn-in”.
- **chain_slice** – Subset the chain with a slice. Any “burn-in” removal occurs first.
- **x_names** – Names or identifiers of the parameters
- **lower_bound** – array of potential lower bounds for the parameters
- **upper_bound** – array of potential upper bounds for the parameters

Returns**Return type** The ensemble.

```
predict(predictor: Callable, prediction_id: Optional[str] = None, sensi_orders: Tuple = (0), default_value: Optional[float] = None, mode: str = 'mode_fun', include_llh_weights: bool = False, include_sigmay: bool = False, engine: Optional[pypesto.engine.base.Engine] = None, progress_bar: bool = True) → pypesto.ensemble.ensemble.Prediction
```

Run predictions for a full ensemble.

User needs to hand over a predictor function and settings, then all results are grouped as EnsemblePrediction for the whole ensemble

Parameters

- **predictor** – Prediction function, e.g., an AmiciPredictor
- **prediction_id** – Identifier for the predictions
- **sensi_orders** – Specifies which sensitivities to compute, e.g. (0,1) -> fval, grad
- **default_value** – If parameters are needed in the mapping, which are not found in the parameter source, it can make sense to fill them up with this default value (e.g. `np.nan`) in some cases (to be used with caution though).
- **mode** – Whether to compute function values or residuals.
- **include_llh_weights** – Whether to include weights in the output of the predictor.
- **include_sigmay** – Whether to include standard deviations in the output of the predictor.
- **engine** – Parallelization engine. Defaults to sequential execution on a *SingleCoreEngine*.
- **progress_bar** – Whether to display a progress bar.

Returns

Return type The prediction of the ensemble.

```
class pypesto.ensemble.EnsemblePrediction(predictor: Optional[Callable[[Sequence],  
pypesto.predict.result.PredictionResult]]  
= None, prediction_id: Optional[str]  
= None, prediction_results: Optional[Sequence[pypesto.predict.result.PredictionResult]]  
= None, lower_bound: Optional[Sequence[numumpy.ndarray]]  
= None, upper_bound: Optional[Sequence[numumpy.ndarray]] = None)
```

Bases: `object`

Class of ensemble prediction.

An ensemble prediction consists of an ensemble, i.e., a set of parameter vectors and their identifiers such as a sample, and a prediction function. It can be attached to a ensemble-type object

```
__init__(predictor: Optional[Callable[[Sequence], pypesto.predict.result.PredictionResult]]  
= None, prediction_id: Optional[str] = None, prediction_results: Optional[Sequence[pypesto.predict.result.PredictionResult]] = None, lower_bound:  
Optional[Sequence[numumpy.ndarray]] = None, upper_bound: Optional[Sequence[numumpy.ndarray]] = None)
```

Initialize.

Parameters

- **predictor** – Prediction function, e.g., an AmiciPredictor, which takes a parameter vector as input and outputs a `PredictionResult` object
- **prediction_id** – Identifier for the predictions
- **prediction_results** – List of `PredictionResult` objects
- **lower_bound** – Array of potential lower bounds for the predictions, should have the same shape as the output of the predictions, i.e., a list of numpy array (one list entry per condition), with the arrays having the shape of n_timepoints x n_outputs for each condition.
- **upper_bound** – array of potential upper bounds for the parameters

compute_chi2 (*amici_objective*: *pypesto.objective.amici.AmiciObjective*)

Compute the chi² error of the weighted mean trajectory.

Parameters **amici_objective** – The objective function of the model, the parameter ensemble was created from.

Returns

Return type The chi² error.

compute_summary (*percentiles_list*: *Sequence[int]* = (5, 20, 80, 95), *weighting*: *bool* = False, *compute_weighted_sigma*: *bool* = False) → Dict

Compute summary from the ensemble prediction results.

Summary includes the mean, the median, the standard deviation and possibly percentiles. Those summary results are added as a data member to the EnsemblePrediction object.

Parameters

- **percentiles_list** – List or tuple of percent numbers for the percentiles
- **weighting** – Whether weights should be used for trajectory.
- **compute_weighted_sigma** – Whether weighted standard deviation of the ensemble mean trajectory should be computed. Defaults to False.

Returns dictionary of predictions results with the keys mean, std, median, percentiles, ...

Return type summary

condense_to_arrays ()

Add prediction result to EnsemblePrediction object.

Reshape the prediction results to an array and add them as a member to the EnsemblePrediction objects. It's meant to be used only if all conditions of a prediction have the same observables, as this is often the case for large-scale data sets taken from online databases or similar.

class *pypesto.ensemble.EnsembleType* (*value*)

Bases: *enum.Enum*

Class to specify the type of ensemble.

ensemble = 1

sample = 2

unprocessed_chain = 3

class *pypesto.ensemble.Enum* (*value*)

Bases: *object*

Generic enumeration.

Derive from this class to define new enumerations.

name

The name of the Enum member.

value

The value of the Enum member.

pypesto.ensemble.get_covariance_matrix_parameters (*ens*:

pypesto.ensemble.ensemble.Ensemble)

→ *numpy.ndarray*

Compute the covariance of ensemble parameters.

Parameters **ens** – Ensemble object containing a set of parameter vectors

Returns covariance matrix of ensemble parameters

Return type covariance_matrix

```
pypesto.ensemble.get_covariance_matrix_predictions(ens:  
    Union[pypesto.ensemble.ensemble.Ensemble,  
          pypesto.ensemble.ensemble.EnsemblePrediction],  
    prediction_index: int = 0) →  
    numpy.ndarray
```

Compute the covariance of ensemble predictions.

Parameters

- **ens** – Ensemble object containing a set of parameter vectors and a set of predictions or EnsemblePrediction object containing only predictions
- **prediction_index** – index telling which prediction from the list should be analyzed

Returns covariance matrix of ensemble predictions

Return type covariance_matrix

```
pypesto.ensemble.get_pca_representation_parameters(ens:  
    pypesto.ensemble.ensemble.Ensemble,  
    n_components: int = 2,  
    rescale_data: bool = True,  
    rescaler: Optional[Callable] =  
    None) → Tuple
```

PCA of parameter ensemble.

Compute the representation with reduced dimensionality via principal component analysis (with a given number of principal components) of the parameter ensemble.

Parameters

- **ens** – Ensemble objects containing a set of parameter vectors
- **n_components** – number of components for the dimension reduction
- **rescale_data** – flag indicating whether the principal components should be rescaled using a rescaler function (e.g., an arcsinh function)
- **rescaler** – callable function to rescale the output of the PCA (defaults to numpy.arcsinh)

Returns

- *principal_components* – principal components of the parameter vector ensemble
- *pca_object* – returned fitted pca object from sklearn.decomposition.PCA()

```
pypesto.ensemble.get_pca_representation_predictions(ens:  
    Union[pypesto.ensemble.ensemble.Ensemble,  
          pypesto.ensemble.ensemble.EnsemblePrediction],  
    prediction_index: int = 0,  
    n_components: int = 2,  
    rescale_data: bool = True,  
    rescaler: Optional[Callable] =  
    None) → Tuple
```

PCA of ensemble prediction.

Compute the representation with reduced dimensionality via principal component analysis (with a given number of principal components) of the ensemble prediction.

Parameters

- **ens** – Ensemble objects containing a set of parameter vectors and a set of predictions or EnsemblePrediction object containing only predictions
- **prediction_index** – index telling which prediction from the list should be analyzed
- **n_components** – number of components for the dimension reduction
- **rescale_data** – flag indicating whether the principal components should be rescaled using a rescaler function (e.g., an arcsinh function)
- **rescaler** – callable function to rescale the output of the PCA (defaults to numpy.arcsinh)

Returns

- *principal_components* – principal components of the parameter vector ensemble
- *pca_object* – returned fitted pca object from sklearn.decomposition.PCA()

`pypesto.ensemble.get_percentile_label(percentile: Union[float, int, str]) → str`

Convert a percentile to a label.

Labels for percentiles are used at different locations (e.g. ensemble prediction code, and visualization code). This method ensures that the same percentile is labeled identically everywhere.

The percentile is rounded to two decimal places in the label representation if it is specified to more decimal places. This is for readability in plotting routines, and to avoid float to string conversion issues related to float precision.

Parameters **percentile** – The percentile value that will be used to generate a label.

Returns

Return type The label of the (possibly rounded) percentile.

```
pypesto.ensemble.get_spectral_decomposition_lowlevel(matrix:      numpy.ndarray,
                                                       normalize:   bool = False,
                                                       only_separable_directions:
                                                       bool = False,      cut-
                                                       off_absolute_separable:
                                                       float = 1e-16,      cut-
                                                       off_relative_separable:
                                                       float = 1e-16,
                                                       only_identifiable_directions:
                                                       bool = False,      cut-
                                                       off_absolute_identifiable:
                                                       float = 1e-16,      cut-
                                                       off_relative_identifiable:
                                                       float = 1e-16) → Tu-
                                                       ple[numpy.ndarray,
                                                       numpy.ndarray]
```

Compute the spectral decomposition of ensemble parameters or predictions.

Parameters

- **matrix** – symmetric matrix (typically a covariance matrix) of parameters or predictions
- **normalize** – flag indicating whether the returned Eigenvalues should be normalized with respect to the largest Eigenvalue
- **only_separable_directions** – return only separable directions according to cut-off_[absolute/relative]_separable
- **cutoff_absolute_separable** – Consider only eigenvalues of the covariance matrix above this cutoff (only applied when only_separable_directions is True)

- **cutoff_relative_separable** – Consider only eigenvalues of the covariance matrix above this cutoff, when rescaled with the largest eigenvalue (only applied when only_separable_directions is True)
- **only_identifiable_directions** – return only identifiable directions according to cutoff_[absolute/relative]_identifiable
- **cutoff_absolute_identifiable** – Consider only low eigenvalues of the covariance matrix with inverses above of this cutoff (only applied when only_identifiable_directions is True)
- **cutoff_relative_identifiable** – Consider only low eigenvalues of the covariance matrix when rescaled with the largest eigenvalue with inverses above of this cutoff (only applied when only_identifiable_directions is True)

Returns

- *eigenvalues* – Eigenvalues of the covariance matrix
- *eigenvectors* – Eigenvectors of the covariance matrix

```
pypesto.ensemble.get_spectral_decomposition_parameters(ens:
```

```
    pypesto.ensemble.ensemble.Ensemble,
    normalize: bool = False,
    only_separable_directions:
        bool = False, cutoff_absolute_separable:
            float = 1e-16, cutoff_relative_separable:
                float = 1e-16,
                only_identifiable_directions:
                    bool = False, cutoff_absolute_identifiable:
                        float = 1e-16, cutoff_relative_identifiable:
                            float = 1e-16) →
    Tuple[numpy.ndarray,
          numpy.ndarray]
```

Compute the spectral decomposition of ensemble parameters.

Parameters

- **ens** – Ensemble object containing a set of parameter vectors
- **normalize** – flag indicating whether the returned Eigenvalues should be normalized with respect to the largest Eigenvalue
- **only_separable_directions** – return only separable directions according to cutoff_[absolute/relative]_separable
- **cutoff_absolute_separable** – Consider only eigenvalues of the covariance matrix above this cutoff (only applied when only_separable_directions is True)
- **cutoff_relative_separable** – Consider only eigenvalues of the covariance matrix above this cutoff, when rescaled with the largest eigenvalue (only applied when only_separable_directions is True)
- **only_identifiable_directions** – return only identifiable directions according to cutoff_[absolute/relative]_identifiable

- **cutoff_absolute_identifiable** – Consider only low eigenvalues of the covariance matrix with inverses above of this cutoff (only applied when only_identifiable_directions is True)
- **cutoff_relative_identifiable** – Consider only low eigenvalues of the covariance matrix when rescaled with the largest eigenvalue with inverses above of this cutoff (only applied when only_identifiable_directions is True)

Returns

- *eigenvalues* – Eigenvalues of the covariance matrix
- *eigenvectors* – Eigenvectors of the covariance matrix

```
pypesto.ensemble.get_spectral_decomposition_predictions(ens:
```

```
pypesto.ensemble.ensemble.Ensemble,
normalize: bool = False,
only_separable_directions:
bool = False, cutoff_absolute_separable:
float = 1e-16, cutoff_relative_separable:
float = 1e-16,
only_identifiable_directions:
bool = False, cutoff_absolute_identifiable:
float = 1e-16, cutoff_relative_identifiable:
float = 1e-16) → Tuple[numpy.ndarray,
numpy.ndarray]
```

Compute the spectral decomposition of ensemble predictions.

Parameters

- **ens** – Ensemble object containing a set of parameter vectors and a set of predictions or EnsemblePrediction object containing only predictions
- **normalize** – flag indicating whether the returned Eigenvalues should be normalized with respect to the largest Eigenvalue
- **only_separable_directions** – return only separable directions according to cutoff_[absolute/relative]_separable
- **cutoff_absolute_separable** – Consider only eigenvalues of the covariance matrix above this cutoff (only applied when only_separable_directions is True)
- **cutoff_relative_separable** – Consider only eigenvalues of the covariance matrix above this cutoff, when rescaled with the largest eigenvalue (only applied when only_separable_directions is True)
- **only_identifiable_directions** – return only identifiable directions according to cutoff_[absolute/relative]_identifiable
- **cutoff_absolute_identifiable** – Consider only low eigenvalues of the covariance matrix with inverses above of this cutoff (only applied when only_identifiable_directions is True)
- **cutoff_relative_identifiable** – Consider only low eigenvalues of the covariance matrix when rescaled with the largest eigenvalue with inverses above of this cutoff (only applied when only_identifiable_directions is True)

Returns

- *eigenvalues* – Eigenvalues of the covariance matrix
- *eigenvectors* – Eigenvectors of the covariance matrix

```
pypesto.ensemble.get_umap_representation_parameters(ens:  
                                                 pypesto.ensemble.ensemble.Ensemble,  
                                                 n_components: int = 2, nor-  
                                                 malize_data: bool = False,  
                                                 **kwargs) → Tuple
```

UMAP of parameter ensemble.

Compute the representation with reduced dimensionality via umap (with a given number of umap components) of the parameter ensemble. Allows to pass on additional keyword arguments to the umap routine.

Parameters

- **ens** – Ensemble objects containing a set of parameter vectors
- **n_components** – number of components for the dimension reduction
- **normalize_data** – flag indicating whether the parameter ensemble should be rescaled with mean and standard deviation

Returns

- *umap_components* – first components of the umap embedding
- *umap_object* – returned fitted umap object from umap.UMAP()

```
pypesto.ensemble.get_umap_representation_predictions(ens:  
                                                 Union[pypesto.ensemble.ensemble.Ensemble,  
                                                 pypesto.ensemble.ensemble.EnsemblePrediction],  
                                                 prediction_index: int = 0,  
                                                 n_components: int = 2, nor-  
                                                 malize_data: bool = False,  
                                                 **kwargs) → Tuple
```

UMAP of ensemble prediction.

Compute the representation with reduced dimensionality via umap (with a given number of umap components) of the ensemble predictions. Allows to pass on additional keyword arguments to the umap routine.

Parameters

- **ens** – Ensemble objects containing a set of parameter vectors and a set of predictions or EnsemblePrediction object containing only predictions
- **prediction_index** – index telling which prediction from the list should be analyzed
- **n_components** – number of components for the dimension reduction
- **normalize_data** – flag indicating whether the parameter ensemble should be rescaled with mean and standard deviation

Returns

- *umap_components* – first components of the umap embedding
- *umap_object* – returned fitted umap object from umap.UMAP()

```
pypesto.ensemble.read_ensemble_prediction_from_h5 (predictor:          Op-
                                                tional[Callable[[Sequence],
                                                pypesto.predict.result.PredictionResult]],
                                                input_file: str)
```

Read an ensemble prediction from an HDF5 File.

```
pypesto.ensemble.read_from_csv (path: str, sep: str = '\t', index_col: int = 0, head-
                                line_parser: Optional[Callable] = None, ensemble_type:          Op-
                                                tional[pypesto.ensemble.constants.EnsembleType] = None,
                                                lower_bound: Optional[numumpy.ndarray] = None, upper_bound:          Op-
                                                tional[numumpy.ndarray] = None)
```

Create an ensemble from a csv file.

Parameters

- **path** – path to csv file to read in parameter ensemble
- **sep** – separator in csv file
- **index_col** – index column in csv file
- **headline_parser** – A function which reads in the headline of the csv file and converts it into vector_tags (see constructor of Ensemble for more details)
- **ensemble_type** – Ensemble type: representative sample or random ensemble
- **lower_bound** – array of potential lower bounds for the parameters
- **upper_bound** – array of potential upper bounds for the parameters

Returns Ensemble object of parameter vectors

Return type result

```
pypesto.ensemble.read_from_df (dataframe: pandas.core.frame.DataFrame, headline_parser:          Op-
                                         Optional[Callable] = None, ensemble_type:          Op-
                                         tional[pypesto.ensemble.constants.EnsembleType] = None,
                                         lower_bound: Optional[numumpy.ndarray] = None, upper_bound:          Op-
                                         tional[numumpy.ndarray] = None)
```

Create an ensemble from a csv file.

Parameters

- **dataframe** – pandas.DataFrame to read in parameter ensemble
- **headline_parser** – A function which reads in the headline of the csv file and converts it into vector_tags (see constructor of Ensemble for more details)
- **ensemble_type** – Ensemble type: representative sample or random ensemble
- **lower_bound** – array of potential lower bounds for the parameters
- **upper_bound** – array of potential upper bounds for the parameters

Returns Ensemble object of parameter vectors

Return type result

```
pypesto.ensemble.write_ensemble_prediction_to_h5 (ensemble_prediction:          Op-
                                                pypesto.ensemble.ensemble.EnsemblePrediction,
                                                output_file: str, base_path:          Op-
                                                tional[str] = None)
```

Write an *EnsemblePrediction* to hdf5.

Parameters

- **ensemble_prediction** – The prediciton to be saved.
- **output_file** – The filename of the hdf5 file.
- **base_path** – An optional filepath where the file should be saved to.

CONTRIBUTE

5.1 Workflow

If you start working on a new feature or a fix, please create an issue on GitHub shortly describing the issue and assign yourself. Your startpoint should always be the `develop` branch, which contains the lastest updates.

Create an own branch or fork, on which you can implement your changes. To get your work merged, please:

1. create a pull request to the `develop` branch with a meaningful summary,
2. check that code changes are covered by tests, and all tests pass,
3. check that the documentation is up-to-date,
4. request a code review from the main developers.

5.2 Environment

If you contribute to the development of pyPESTO, install developer requirements via:

```
pip install -r requirements-dev.txt
```

This installs the tools described below.

5.2.1 Pre-commit hooks

Firstly, this installs a `pre-commit` tool. To add those hooks to the `.git` folder of your local clone such that they are run on every commit, run:

```
pre-commit install
```

When adding new hooks, consider manually running `pre-commit run --all-files` once as usually only the diff is checked. The configuration is specified in `.pre-commit-config.yaml`.

Should it be necessary to perform commits without pre-commit verification, use `git commit --no-verify` or the shortform `-n`.

5.2.2 Tox

Secondly, this installs the virtual testing tool `tox`, which we use for all tests, format and quality checks. Its configuration is specified in `tox.ini`. To run it locally, simply execute:

```
tox [-e flake8,doc]
```

with optional `-e` options specifying the environments to run, see `tox.ini` for details.

5.3 GitHub Actions

For automatic continuous integration testing, we use GitHub Actions. All tests are run there on pull requests and required to pass. The configuration is specified in `.github/workflows/ci.yml`.

5.4 Documentation

To make pyPESTO easily usable, we try to provide good documentation, including code annotation and usage examples. The documentation is hosted at pypesto.readthedocs.io and updated automatically on merges to the main branches. To create the documentation locally, first install the requirements via:

```
pip install .[doc]
```

and then compile the documentation via:

```
cd doc  
make html
```

The documentation is then under `doc/_build`.

Alternatively, the documentation can be compiled and tested via a single line:

```
tox -e doc
```

When adding code, all modules, classes, functions, parameters, code blocks should be properly documented.

For docstrings, we follow the numpy docstring standard. Check [here](#) for a detailed explanation.

5.5 Unit tests

Unit tests are located in the `test` folder. All files starting with `test_` contain tests and are automatically run on GitHub Actions. Run them locally via e.g.:

```
tox -e base
```

with `base` covering basic tests, but some parts (`optimize`, `petab`, ...) being in separate subfolders. This boils mostly down to e.g.:

```
pytest test/base
```

You can also run only specific tests.

Unit tests can be written with `pytest` or `unittest`.

Code changes should always be covered by unit tests. It might not always be easy to test code which is based on random sampling, but we still encourage general sanity and integration tests. We highly encourage a [test-driven development](#) style.

5.6 PEP8

We try to respect the [PEP8](#) coding standards. We run [flake8](#) as part of the tests. The flake8 plugins used are specified in `tox.ini` and the flake8 configuration is given in `.flake8`. You can run the checks locally via:

```
tox -e flake8
```


DEPLOY

New production releases should be created every time the `main` branch is updated.

6.1 Versions

For version numbers, we use `A.B.C`, where

- `C` is increased for bug fixes,
- `B` is increased for new features and minor API breaking changes,
- `A` is increased for major API breaking changes,

as suggested by the [Python packaging guide](#).

6.2 Create a new release

After new commits have been added via pull requests to the `develop` branch, changes can be merged to `main` and a new version of pyPESTO can be released.

6.2.1 Merge into main

1. create a pull request from `develop` to `main`,
2. check that all code changes are covered by tests and all tests pass,
3. check that the documentation is up-to-date,
4. adapt the version number in `pypesto/version.py` (see above),
5. update the release notes in `CHANGELOG.rst`,
6. request a code review,
7. merge into the origin `main` branch.

To be able to actually perform the merge, sufficient rights may be required. Also, at least one review is required.

6.2.2 Create a release on GitHub

After merging into `main`, create a new release on GitHub. This can be done either directly on the project GitHub website, or via the CLI as described in [Git Basics - Tagging](#). In the release form,

- specify a tag with the new version as specified in `pypesto/version.py`,
- include the latest additions to `CHANGELOG.rst` in the release description.

6.3 Upload to PyPI

The upload to the python package index PyPI has been automatized via GitHub Actions and is triggered whenever a new release tag is published.

Should it be necessary to manually upload a new version to PyPI, proceed as follows: First, a so called “wheel” is created via:

```
python setup.py bdist_wheel
```

A wheel is essentially a zip archive which contains the source code and the binaries (if any).

This archive is uploaded using twine:

```
twine upload dist/pypesto-x.y.z-py3-non-any.wheel
```

replacing `x.y.z` by the respective version number.

For a more in-depth discussion see also the [section on distributing packages](#) of the Python packaging guide.

RELEASE NOTES

7.1 0.2 series

7.1.1 0.2.9 (2021-11-03)

- General:

- Automatically save results (#749)
- Update all docstrings to numpy standard (#750)
- Add Google Colab and nbviewer links to all notebooks for online execution (#758)
- Option to not save hess and sres in result (#760)
- Set minimum supported python version to 3.7 (#755)

- Visualization:

- Parameterize start index in optimized model fit (#744)

7.1.2 0.2.8 (2021-10-28)

- Ptab:

- Use correct measurement column name in `rdatas_to_simulation_df` (#721)
- Visualize optimized model fit via Ptab problem (#725)
- Un-ignore observable scaling tests (#742)
- New function to plot model trajectory with custom time points (#739)

- Optimization:

- OOD Refactor startpoint generation (#732)
- Update to fides 0.6.0 (#733)
- Correctly report FVAL vs CHI2 values in fides (#741)

- Ensemble:

- Option for using weighted ensemble means (#702)
- Default names and bounds for `Ensemble.from_sample` (#730)

- Storage:

- Load optimization result from HDF5 history (#726)

- **General:**
 - Enable use of priors with least squares optimizers (#745)
 - Add temporary CITATION.cff file (#734)
 - Regular scheduled CI runs (#754)
 - Allow to not copy objective in problem (#756)
 - **Fixes:**
 - Fix non-exported visualization in notebook (#729)
 - Mark some more tests as flaky (#704)
 - Fix minor data type and OOD issues in parameter and waterfall plots (#731)
- ### 7.1.3 0.2.7 (2021-07-30)
- **Finite Differences:**
 - Adaptive finite differences (#671)
 - Add helper function for checking gradients of objectives (#690)
 - Small bug fixes (#711, #714)
 - **Storage:**
 - Store representation of the objective (#669)
 - Minor fixes in HDF5 history (#679)
 - HDF5 reader for ensemble predictions (#681)
 - Update storage demo jupyter notebook (#699)
 - Option to trim trace to be monotonically decreasing (#705)
 - **General:**
 - Improved tests and bug fixes of validation intervals (#676, #685)
 - Add input file validation via PEtab linter for PEtab import (#678)
 - Remove default values from docstring (#680)
 - Minor fixes/improvements of ensembles (#687, #688)
 - Fix sorting of optimization values including *Nan* values (#691)
 - Specify axis limits for plotting (#693)
 - Minor fixes in visualization (#696)
 - Add installation option *all_optimizers* (#695)
 - Improve installation documentation (#689)
 - Update *pysb* and *BNG* version on GitHub Actions (#697)
 - Bug fix in steady state guesses (#715)

7.1.4 0.2.6 (2021-05-17)

- **Objective:**
 - Basic finite differences (#666)
 - Fix factor 2 in res/fval values (#619)
- **Optimization:**
 - Sort optimization results when appending (#668)
 - Read optimizer result from HDF5 (previously only CSV) (#663)
- **Storage:**
 - Load ensemble from HDF5 (#640)
- **CI:**
 - Add flake8 checks as pre-commit hook (#662)
 - Add efficient biological conversion reaction test model (#619)
- **General:**
 - No automatic import of the predict module (#657)
 - Assert unique problem parameter names (#665)
 - Load ensemble from optimization result with and without history usage (#640)
 - Calculate validation profile significance (#658)
 - Set pypesto screen logger to “INFO” by default (#667)
- **Minor fixes:**
 - Fix axis variable overwriting in *visualize.sampling_parameter_traces* (#665)

7.1.5 0.2.5 (2021-05-04)

- **Objectives:**
 - New Aesara objective (#623, #629, #635)
- **Sampling:**
 - New Emcee sampler (#606)
 - Fix compatibility to new Theano version (#650)
- **Storage:**
 - Improve hdf5 storage documentation (#612)
 - Hdf5 history for MultiProcessEngine (#650)
 - Minor fixes (#637, #638, #645, #649)
- **Visualization:**
 - Fix bounds of parameter plots (#601)
 - Fix waterfall plots with multiple results (#611)
- **CI:**

- Move CI tests on GitHub Actions to python 3.9 (#598)
- Add issue template (#604)
- Update BionetGen Link (#630)
- Introduce project.toml (#634)
- **General:**
 - Introduce progress bar for optimization, profiles and ensembles (#641)
 - Extend gradient checking functionality (#644)
- **Minor fixes:**
 - Fix installation of ipopt (#599)
 - Fix Zenodo link (#601)
 - Fix duplicates in documentation (#603)
 - Fix least squares optimizers (#617 #631 #632)
 - Fix trust region options (#616)
 - Fix slicing for new AMICI release (#621)
 - Refactor and document latin hypercube sampling (#647)
 - Fix missing SBML name in PEtab import (#648)

7.1.6 0.2.4 (2021-03-12)

- **Ensembles/Sampling:**
 - General ensemble analysis, visualization, storage (#557, #565, #568)
 - Calculate and plot MCMC parameter and prediction CIs via ensemble definition, parallelize ensemble predictions (#490)
- **Optimization:**
 - New optimizer: SciPy Differential Evolution (#543)
 - Set fides default to hybrid (#578)
- **AMICI:**
 - Make *guess_steadystate* less restrictive (#561) and have a more intuitive default behavior (#562, #582)
 - Customize time points (#490)
- **Storage:**
 - Save HDF5 history with SingleCoreEngine (#564)
 - Add read/write function for whole results (#589)
- **Engines:**
 - MPI based distributed parallelization (#542)
- **Visualization:**
 - Speed up waterfall plots by resizing scales only once (#577)
 - Change waterfall default offset to 1 - minimum (#593)

- CI:
 - Move GHA CI tests to pull request level for better cooperability (#574)
 - Streamline test environments using tox and pre-commit hooks (#579)
 - Test profile and sampling storage (#585)
 - Update for Ubuntu 20.04, add rerun on failure (#587)
- Minor fixes (release notes #558, nlop tests #559, close files #495, visualization #554, deployment #560, flakiness #570, aggregated deepcopy #572, respect user-provided offsets #576, update to SWIG 4 #591, check overwrite in profile writing #566)

7.1.7 0.2.3 (2021-01-18)

- New optimizers:
 - FIDES (#506, #503 # 500)
 - NLOpt (#493)
- Extended PEtab support:
 - PySB import (#437)
 - Support of PEtab's initializationPriors (#535)
 - Support of prior parameterScale{Normal,Laplace} (#520)
 - Example notebook for synthetic data generation (#482)
- General new and improved functionality:
 - Predictions (#544)
 - Move tests to GitHub Actions (#524)
 - Parallelize profile calculation (#532)
 - Save *x_guesses* in *pypesto.problem* (#494)
 - Improved finite difference gradients (#464)
 - Support of unconstrained optimization (#519)
 - Additional NaN check for fval, grad and hessian (#521)
 - Add sanity checks for optimizer bounds (#516)
- Improvements in storage:
 - Fix hdf5 export of optimizer history (#536)
 - Fix reading *x_names* from hdf5 history (#528)
 - Storage does not save empty arrays (#489)
 - hdf5 storage sampling (#546)
 - hdf5 storage parameter profiles (#546)
- Improvements in the visualization routines:
 - Plot parameter values as histogram (#485)
 - Fix y axis limits in waterfall plots (#503)
 - Fix color scheme in visualization (#498)

- Improved visualization of optimization results (#486)
- Several small bug fixes (#547, #541, #538, #533, #512, #508)

7.1.8 0.2.2 (2020-10-05)

- New optimizer: CMA-ES (#457)
- New plot: Optimizer convergence summary (#446)
- **Fixes in visualization:**
 - Type checks for reference points (#460)
 - y_limits in waterfall plots with multiple results (#475)
- Support of new amici release (#469)
- **Multiple fixes in optimization code:**
 - Remove unused argument for dlib optimizer (#466)
 - Add check for installation of ipopt (#470)
 - Add maxiter as default option of dlib (#474)
- Numpy based subindexing in amici_util (#462)
- Check amici/PEtab installation (#477)

7.1.9 0.2.1 (2020-09-07)

- Example Notebook for prior functionality (#438)
- Changed parameter indexing in profiling routines (#419)
- Basic sanity checking for parameter fixing (#420)
- **Bug fixes in:**
 - Displaying of multi start optimization (#430)
 - AMICI error output (#428)
 - Axes scaling/limits in waterfall plots (#441)
 - Priors (PEtab import, error handling) (#448, #452, #454)
- Improved sampling diagnostics (e.g. effective samples size) (#426)
- Improvements and bug fixes in parameter plots (#425)

7.1.10 0.2.0 (2020-06-17)

Major:

- Modularize import, to import optimization, sampling and profiling separately (#413)

Minor:

- **Bug fixes in**
 - sampling (#412)

- visualization (#405)
- PEtab import (#403)
- Hessian computation (#390)
- Improve hdf5 error output (#409)
- Outlaw large new files in GitHub commits (#388)

7.2 0.1 series

7.2.1 0.1.0 (2020-06-17)

Objective

- Write solver settings to stream to enable serialization for distributed systems (#308)
- **Refactor objective function (#347)**
 - Removes necessity for all of the nasty binding/undbinding in AmiciObjective
 - Substantially reduces the complexity of the AggregatedObjective class
 - Aggregation of functions with inconsistent sensi_order/mode support
 - Introduce ObjectiveBase as an abstract Objective class
 - Introduce FunctionObjective for objectives from functions
- Implement priors with gradients, integrate with PEtab (#357)
- Fix minus sign in AmiciObjective.get_error_output (#361)
- Implement a prior class, derivatives for standard models, interface with PEtab (#357)
- Use *amici.import_model_module* to resolve module loading failure (#384)

Problem

- Tidy up problem vectors using properties (#393)

Optimization

- Interface IpOpt optimizer (#373)

Profiles

- Tidy up profiles (#356)
- Refactor profiles; add locally approximated profiles (#369)
- Fix profiling and visualization with fixed parameters (#393)

Sampling

- Geweke test for sampling convergence (#339)
- Implement basic Pymc3 sampler (#351)
- Make theano for pymc3 an optional dependency (allows using pypesto without pymc3) (#356)
- Progress bar for MCMC sampling (#366)
- Fix Geweke test crash for small sample sizes (#376)
- In parallel tempering, allow to only temperate the likelihood, not the prior (#396)

History and storage

- Allow storing results in a pre-filled hdf5 file (#290)
- Various fixes of the history (reduced vs. full parameters, read-in from file, chi2 values) (#315)
- Fix proper dimensions in result for failed start (#317)
- Create required directories before creating hdf5 file (#326)
- Improve storage and docs documentation (#328)
- Fix storing x_free_indices in hdf5 result (#334)
- Fix problem hdf5 return format (#336)
- Implement partial trace extraction, simplify History API (#337)
- Save really all attributes of a Problem to hdf5 (#342)

Visualization

- Customizable xLabels and tight layout for profile plots (#331)
- Fix non-positive bottom ylim on a log-scale axis in waterfall plots (#348)
- Fix “palette list has the wrong number of colors” in sampling plots (#372)
- Allow to plot multiple profiles from one result (#399)

Logging

- Allow easier specification of only logging for submodules (#398)

Tests

- Speed up travis build (#329)
- Update travis test system to latest ubuntu and python 3.8 (#330)
- Additional code quality checks, minor simplifications (#395)

7.3 0.0 series

7.3.1 0.0.13 (2020-05-03)

- Tidy up and speed up tests (#265 and others).
- Basic self-implemented Adaptive Metropolis and Adaptive Parallel Tempering sampling routines (#268).
- Fix namespace sample -> sampling (#275).
- Fix covariance matrix regularization (#275).
- Fix circular dependency *PetabImporter* - *PetabAmiciObjective* via *AmiciObjectBuilder*, *PetabAmiciObjective* becomes obsolete (#274).
- Define *AmiciCalculator* to separate the AMICI call logic (required for hierarchical optimization) (#277).
- Define initialize function for resetting steady states in *AmiciObjective* (#281).
- Fix scipy least squares options (#283).
- Allow failed starts by default (#280).
- Always copy parameter vector in objective to avoid side effects (#291).

- Add Dockerfile (#288).
- Fix header names in CSV history (#299).

Documentation:

- Use imported members in autodoc (#270).
- Enable python syntax highlighting in notebooks (#271).

7.3.2 0.0.12 (2020-04-06)

- Add typehints to global functions and classes.
- Add *PetabImporter.rdatas_to_simulation_df* function (all #235).
- Adapt y scale in waterfall plot if convergence was too good (#236).
- Clarify that *Objective* is of type negative log-posterior, for minimization (#243).
- Tidy up *AmiciObjective.parameter_mapping* as implemented in AMICI now (#247).
- Add *MultiThreadEngine* implementing multi-threading aside the *MultiProcessEngine* implementing multi-processing (#254).
- Fix copying and pickling of *AmiciObjective* (#252, #257).
- Remove circular dependence history-objective (#254).
- Fix problem of visualizing results with failed starts (#249).
- Rework history: make thread-safe, use factory methods, make context-specific (#256).
- Improve PEtab usage example (#258).
- Define history base contract, enabling different backends (#260).
- Store optimization results to HDF5 (#261).
- Simplify tests (#263).

Breaking changes:

- *HistoryOptions* passed to *pypesto.minimize* instead of *Objective* (#256).
- *GlobalOptimizer* renamed to *PyswarmOptimizer* (#235).

7.3.3 0.0.11 (2020-03-17)

- Rewrite AmiciObjective and PetabAmiciObjective simulation routine to directly use amici.petab_objective routines (#209, #219, #225).
- Implement petab test suite checks (#228).
- Various error fixes, in particular regarding PEtab and visualization.
- Improve trace structure.
- Fix conversion between fval and chi2, fix FIM (all #223).

7.3.4 0.0.10 (2019-12-04)

- Only compute FIM when sensitivities are available (#194).
- Fix documentation build (#197).
- Add support for pyswarm optimizer (#198).
- Run travis tests for documentation and notebooks only on pull requests (#199).

7.3.5 0.0.9 (2019-10-11)

- Update to AMICI 0.10.13, fix API changes (#185).
- Start using PEtab import from AMICI to be able to import constant species (#184, #185)
- Require PEtab>=0.0.0a16 (#183)

7.3.6 0.0.8 (2019-09-01)

- Add logo (#178).
- Fix petab API changes (#179).
- Some minor bugfixes (#168).

7.3.7 0.0.7 (2019-03-21)

- Support noise models in Petab and Amici.
- Minor Petab update bug fixes.

7.3.8 0.0.6 (2019-03-13)

- Several minor error fixes, in particular on tests and steady state.

7.3.9 0.0.5 (2019-03-11)

- Introduce AggregatedObjective to use multiple objectives at once.
- Estimate steady state in AmiciObjective.
- Check amici model build version in PetabImporter.
- Use Amici multithreading in AmiciObjective.
- Allow to sort multistarts by initial value.
- Show usage of visualization routines in notebooks.
- Various fixes, in particular to visualization.

7.3.10 0.0.4 (2019-02-25)

- Implement multi process parallelization engine for optimization.
- Introduce PrePostProcessor to more reliably handle pre- and post-processing.
- Fix problems with simulating for multiple conditions.
- Add more visualization routines and options for those (colors, reference points, plotting of lists of result obejcts)

7.3.11 0.0.3 (2019-01-30)

- Import amici models and the petab data format automatically using pypesto.PetabImporter.
- Basic profiling routines.

7.3.12 0.0.2 (2018-10-18)

- Fix parameter values
- Record trace of function values
- Amici objective to directly handle amici models

7.3.13 0.0.1 (2018-07-25)

- Basic framework and implementation of the optimization

**CHAPTER
EIGHT**

AUTHORS

This package is mainly developed by:

- Yannik Schälte
- Jakob Vanhoefer
- Fabian Fröhlich
- Paul Stapor

with major contributions by:

- Dantong Wang
- Daniel Weindl
- Polina Lakrisenko
- Elba Raimúndez
- Leonard Schmiester
- Dilan Pathirana
- Paul Jonas Jost
- Lorenzo Contento
- Erika Dudkin
- Simon Merkt
- Carolin Loos
- Philipp Städter

CONTACT

Discovered an error? Need help? Not sure if something works as intended? Please contact us!

- Yannik Schälte: yannik.schaelte@gmail.com

**CHAPTER
TEN**

LICENSE

Copyright (c) 2018, Jan Hasenauer
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are
→permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list
→of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this
→list of conditions and the following disclaimer in the documentation and/or other
→materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be
→used to endorse or promote products derived from this software without specific
→prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY
→EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
→WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.
→IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT,
→INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
→NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
→PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
→WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
→ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
→POSSIBILITY OF SUCH DAMAGE.

CHAPTER
ELEVEN

LOGO



pyPESTO's logo can be found in multiple variants in the doc/logo directory on github, in svg and png format. It is made available under a [creative commons CC0 license](#). You are encouraged to use it e.g. in presentations and posters.

We thank Patrick Beart for his contribution to the logo.

CHAPTER
TWELVE

INDICES AND TABLES

- genindex
- modindex
- search

PYTHON MODULE INDEX

p

`pypesto`, 109
`pypesto.engine`, 206
`pypesto.ensemble`, 213
`pypesto.logging`, 213
`pypesto.objective`, 132
`pypesto.optimize`, 169
`pypesto.petab`, 165
`pypesto.predict`, 162
`pypesto.problem`, 155
`pypesto.profile`, 175
`pypesto.result`, 186
`pypesto.sample`, 180
`pypesto.startpoint`, 207
`pypesto.store`, 209
`pypesto.visualize`, 188

INDEX

Symbols

`__call__()` (*pypesto.ObjectiveBase method*), 124
`__call__()` (*pypesto.objective.AmiciCalculator method*), 133
`__call__()` (*pypesto.objective.ObjectiveBase method*), 150
`__call__()` (*pypesto.predict.AmiciPredictor method*), 162
`__call__()` (*pypesto.problem.ObjectiveBase method*), 155
`__call__()` (*pypesto.startpoint.FunctionStartpoints method*), 208
`__call__()` (*pypesto.startpoint.LatinHypercubeStartpoints method*), 208
`__call__()` (*pypesto.startpoint.StartpointMethod method*), 208
`__call__()` (*pypesto.startpoint.UniformStartpoints method*), 209
`__init__()` (*pypesto.AmiciObjective method*), 109
`__init__()` (*pypesto.CsvHistory method*), 111
`__init__()` (*pypesto.FD method*), 114
`__init__()` (*pypesto.FDDelta method*), 115
`__init__()` (*pypesto.Hdf5History method*), 115
`__init__()` (*pypesto.History method*), 117
`__init__()` (*pypesto.HistoryOptions method*), 120
`__init__()` (*pypesto.MemoryHistory method*), 120
`__init__()` (*pypesto.Objective method*), 123
`__init__()` (*pypesto.ObjectiveBase method*), 124
`__init__()` (*pypesto.OptimizeResult method*), 127
`__init__()` (*pypesto.OptimizerHistory method*), 128
`__init__()` (*pypesto.Problem method*), 130
`__init__()` (*pypesto.ProfileResult method*), 131
`__init__()` (*pypesto.Result method*), 132
`__init__()` (*pypesto.SampleResult method*), 132
`__init__()` (*pypesto.engine.Engine method*), 206
`__init__()` (*pypesto.engine.MultiProcessEngine method*), 206
`__init__()` (*pypesto.engine.MultiThreadEngine method*), 207
`__init__()` (*pypesto.engine.SingleCoreEngine method*), 207
`__init__()` (*pypesto.engine.Task method*), 207
`__init__()` (*pypesto.ensemble.Ensemble method*), 214
`__init__()` (*pypesto.ensemble.EnsemblePrediction method*), 216
`__init__()` (*pypesto.objective.AggregatedObjective method*), 133
`__init__()` (*pypesto.objective.AmiciCalculator method*), 134
`__init__()` (*pypesto.objective.AmiciObjective method*), 134
`__init__()` (*pypesto.objective.CsvHistory method*), 136
`__init__()` (*pypesto.objective.FD method*), 139
`__init__()` (*pypesto.objective.FDDelta method*), 140
`__init__()` (*pypesto.objective.Hdf5History method*), 141
`__init__()` (*pypesto.objective.History method*), 143
`__init__()` (*pypesto.objective.HistoryOptions method*), 146
`__init__()` (*pypesto.objective.MemoryHistory method*), 146
`__init__()` (*pypesto.objective.NegLogParameterPriors method*), 148
`__init__()` (*pypesto.objective.Objective method*), 149
`__init__()` (*pypesto.objective.ObjectiveBase method*), 151
`__init__()` (*pypesto.objective.OptimizerHistory method*), 154
`__init__()` (*pypesto.optimize.CmaesOptimizer method*), 169
`__init__()` (*pypesto.optimize.DlibOptimizer method*), 170
`__init__()` (*pypesto.optimize.FidesOptimizer method*), 170
`__init__()` (*pypesto.optimize.IpoptOptimizer method*), 170
`__init__()` (*pypesto.optimize.NLoptOptimizer method*), 170
`__init__()` (*pypesto.optimize.OptimizeOptions method*), 171
`__init__()` (*pypesto.optimize.Optimizer method*), 171
`__init__()` (*pypesto.optimize.OptimizerResult method*), 171

```
        method), 173
__init__(pypesto.optimize.PyswarmOptimizer
        method), 173
__init__(pypesto.optimize.PyswarmsOptimizer
        method), 174
__init__(pypesto.optimize.ScipyDifferentialEvolutionOptimizer
        method), 174
__init__(pypesto.optimize.ScipyOptimizer
        method), 174
__init__(pypesto.petab.PetabImporter
        method), 165
__init__(pypesto.petab.PetabImporterPysb
        method), 169
__init__(pypesto.predict.AmiciPredictor
        method), 163
__init__(pypesto.predict.PredictionConditionResult
        method), 164
__init__(pypesto.predict.PredictionResult
        method), 164
__init__(pypesto.predict.PredictorTask
        method), 165
__init__(pypesto.problem.ObjectiveBase
        method), 156
__init__(pypesto.problem.Problem
        method), 160
__init__(pypesto.problem.SupportsFloat
        method), 161
__init__(pypesto.problem.SupportsInt
        method), 162
__init__(pypesto.profile.ProfileOptions
        method), 176
__init__(pypesto.profile.ProfilerResult
        method), 177
__init__(pypesto.result.OptimizeResult
        method), 187
__init__(pypesto.result.ProfileResult
        method), 187
__init__(pypesto.result.Result
        method), 188
__init__(pypesto.result.SampleResult
        method), 188
__init__(pypesto.sample.AdaptiveMetropolisSampler
        method), 181
__init__(pypesto.sample.EmceeSampler
        method), 181
__init__(pypesto.sample.McmcPtResult
        method), 183
__init__(pypesto.sample.MetropolisSampler
        method), 183
__init__(pypesto.sample.ParallelTemperingSampler
        method), 183
__init__(pypesto.sample.Pymc3Sampler
        method), 184
__init__(pypesto.sample.Sampler
        method), 184
__init__(pypesto.startpoint.FunctionStartpoints
        method), 208
__init__(pypesto.startpoint.LatinHypercubeStartpoints
        method), 208
__init__(pypesto.store.OptimizationResultHDF5Reader
        method), 209
__init__(pypesto.store.OptimizationResultHDF5Writer
        method), 210
__init__(pypesto.store.ProblemHDF5Reader
        method), 210
__init__(pypesto.store.ProblemHDF5Writer
        method), 210
__init__(pypesto.store.ProfileResultHDF5Reader
        method), 210
__init__(pypesto.store.ProfileResultHDF5Writer
        method), 211
__init__(pypesto.store.SamplingResultHDF5Reader
        method), 211
__init__(pypesto.store.SamplingResultHDF5Writer
        method), 211
__init__(pypesto.visualize.ReferencePoint
        method), 189
```

A

```
AdaptiveMetropolisSampler (class in
    pypesto.sample), 181
AdaptiveParallelTemperingSampler (class in
    pypesto.sample), 181
adjust_betas() (pypesto.sample.AdaptiveParallelTemperingSampler
    method), 181
adjust_betas() (pypesto.sample.ParallelTemperingSampler
    method), 183
AggregatedObjective (class in pypesto.objective),
    133
AmiciCalculator (class in pypesto.objective), 133
AmiciObjectBuilder (class in pypesto.objective),
    134
AmiciObjective (class in pypesto), 109
AmiciObjective (class in pypesto.objective), 134
AmiciPredictor (class in pypesto.predict), 162
append() (pypesto.OptimizeResult
        method), 127
append() (pypesto.result.OptimizeResult
        method), 187
append_empty_profile_list()
    (pypesto.ProfileResult
        method), 131
append_empty_profile_list()
    (pypesto.result.ProfileResult
        method), 187
append_profile_point()
    (pypesto.profile.ProfilerResult
        method), 177
append_profiler_result()
    (pypesto.ProfileResult
        method), 131
append_profiler_result()
    (pypesto.result.ProfileResult
        method), 187
apply_custom_timepoints()
    (pypesto.AmiciObjective
        method), 110
apply_custom_timepoints()
    (pypesto.objective.AmiciObjective
        method), 135
```

```

apply_steadystate_guess()
    (pypesto.AmiciObjective method), 110
apply_steadystate_guess()
    (pypesto.objective.AmiciObjective method),
    135
approximate_parameter_profile() (in module
    pypesto.profile), 178
as_dataframe() (pypesto.OptimizeResult method),
    127
as_dataframe() (pypesto.result.OptimizeResult
    method), 187
as_list() (pypesto.OptimizeResult method), 127
as_list() (pypesto.result.OptimizeResult method),
    187
assert_instance() (pypesto.HistoryOptions static
    method), 120
assert_instance()
    (pypesto.objective.HistoryOptions static
        method), 146
assert_instance()
    (pypesto.optimize.OptimizeOptions static
        method), 171
assign_clustered_colors() (in module
    pypesto.visualize), 189
assign_clusters() (in module pypesto.visualize),
    189
assign_colors() (in module pypesto.visualize), 189
assign_startpoints() (in module
    pypesto.startpoint), 209
auto_color (pypesto.visualize.ReferencePoint attribute), 189
auto_correlation() (in module pypesto.sample),
    185
B
BACKWARD (pypesto.FD attribute), 114
BACKWARD (pypesto.objective.FD attribute), 139
C
calculate_approximate_ci() (in module
    pypesto.profile), 178
calculate_ci_mcmc_sample() (in module
    pypesto.sample), 185
calculate_ci_mcmc_sample_prediction()
    (in module pypesto.sample), 185
call_unprocessed() (pypesto.AmiciObjective
    method), 110
call_unprocessed() (pypesto.FD method), 114
call_unprocessed() (pypesto.Objective method),
    123
call_unprocessed()
    (pypesto.objective.AggregatedObjective
        method), 133
call_unprocessed()
    (pypesto.objective.AmiciObjective method), 135
call_unprocessed()
    (pypesto.objective.NegLogParameterPriors
        method), 139
call_unprocessed()
    (pypesto.objective.FD method), 139
call_unprocessed()
    (pypesto.objective.NegLogParameterPriors
        method), 148
call_unprocessed() (pypesto.objective.Objective
    method), 149
call_unprocessed()
    (pypesto.objective.ObjectiveBase method),
    151
call_unprocessed() (pypesto.ObjectiveBase
    method), 124
call_unprocessed()
    (pypesto.problem.ObjectiveBase method),
    156
CENTRAL (pypesto.FD attribute), 114
CENTRAL (pypesto.objective.FD attribute), 139
check_grad() (pypesto.objective.ObjectiveBase
    method), 151
check_grad() (pypesto.ObjectiveBase method), 124
check_grad() (pypesto.problem.ObjectiveBase
    method), 156
check_grad_multi_eps()
    (pypesto.objective.ObjectiveBase method),
    151
check_grad_multi_eps() (pypesto.ObjectiveBase
    method), 125
check_grad_multi_eps()
    (pypesto.problem.ObjectiveBase method),
    156
check_gradients() (pypesto.petab.PetabImporter
    method), 166
check_gradients_match_finite_differences()
    (pypesto.AmiciObjective method), 110
check_gradients_match_finite_differences()
    (pypesto.objective.AmiciObjective method),
    135
check_gradients_match_finite_differences()
    (pypesto.objective.ObjectiveBase method), 152
check_gradients_match_finite_differences()
    (pypesto.ObjectiveBase method), 125
check_gradients_match_finite_differences()
    (pypesto.problem.ObjectiveBase method), 157
check_identifiability()
    (pypesto.ensemble.Ensemble method), 214
check_mode() (pypesto.AmiciObjective method), 110
check_mode() (pypesto.objective.AggregatedObjective
    method), 133
check_mode() (pypesto.objective.AmiciObjective
    method), 136
check_mode() (pypesto.objective.NegLogParameterPriors
    method), 139

```

```

        method), 148
check_mode() (pypesto.objective.ObjectiveBase
    method), 152
check_mode() (pypesto.ObjectiveBase method), 125
check_mode() (pypesto.problem.ObjectiveBase
    method), 157
check_sensi_orders() (pypesto.AmiciObjective
    method), 110
check_sensi_orders()
    (pypesto.objective.AggregatedObjective
        method), 133
check_sensi_orders()
    (pypesto.objective.AmiciObjective     method),
    136
check_sensi_orders()
    (pypesto.objective.NegLogParameterPriors
        method), 148
check_sensi_orders()
    (pypesto.objective.ObjectiveBase     method),
    152
check_sensi_orders() (pypesto.ObjectiveBase
    method), 126
check_sensi_orders()
    (pypesto.problem.ObjectiveBase     method),
    157
chi2_quantile_to_ratio() (in     module
    pypesto.profile), 178
CmaesOptimizer (class in pypesto.optimize), 169
color (pypesto.visualize.ReferencePoint attribute), 189
compile_model() (pypesto.petab.PetabImporter
    method), 166
compile_model() (pypesto.petab.PetabImporterPysb
    method), 169
compute_chi2() (pypesto.ensemble.EnsemblePrediction
    method), 216
compute_summary() (pypesto.ensemble.Ensemble
    method), 214
compute_summary()
    (pypesto.ensemble.EnsemblePrediction
        method), 217
condense_to_arrays()
    (pypesto.ensemble.EnsemblePrediction
        method), 217
CONSTANT (pypesto.FDDelta attribute), 115
CONSTANT (pypesto.objective.FDDelta attribute), 140
create_edatas() (pypesto.objective.AmiciObjectBuilder
    method), 134
create_edatas() (pypesto.petab.PetabImporter
    method), 166
create_history() (pypesto.HistoryOptions
    method), 120
create_history() (pypesto.objective.HistoryOptions
    method), 146
create_instance() (pypesto.profile.ProfileOptions
    static method), 176
create_model() (pypesto.objective.AmiciObjectBuilder
    method), 134
create_model() (pypesto.petab.PetabImporter
    method), 166
create_objective() (pypesto.petab.PetabImporter
    method), 166
create_predictor() (pypesto.petab.PetabImporter
    method), 167
create_prior() (pypesto.petab.PetabImporter
    method), 167
create_problem() (pypesto.petab.PetabImporter
    method), 167
create_references() (in     module
    pypesto.visualize), 190
create_solver() (pypesto.objective.AmiciObjectBuilder
    method), 134
create_solver() (pypesto.petab.PetabImporter
    method), 168
create_startpoint_method()
    (pypesto.petab.PetabImporter method), 168
CsvHistory (class in pypesto), 111
CsvHistory (class in pypesto.objective), 136

```

D

```

default_options()
    (pypesto.sample.AdaptiveMetropolisSampler
        class method), 181
default_options()
    (pypesto.sample.AdaptiveParallelTemperingSampler
        class method), 181
default_options()
    (pypesto.sample.MetropolisSampler     class
        method), 183
default_options()
    (pypesto.sample.ParallelTemperingSampler
        class method), 183
default_options() (pypesto.sample.Sampler class
    method), 184
delete_nan_inf() (in module pypesto.visualize),
    190
delta (pypesto.objective.FDDelta attribute), 140
delta_fun (pypesto.objective.FD attribute), 139
delta_grad (pypesto.objective.FD attribute), 139
delta_res (pypesto.objective.FD attribute), 139
dim() (pypesto.Problem property), 130
dim() (pypesto.problem.Problem property), 160
DISTANCE (pypesto.FDDelta attribute), 115
DISTANCE (pypesto.objective.FDDelta attribute), 140
DlibOptimizer (class in pypesto.optimize), 169

```

E

```

effective_sample_size() (in     module
    pypesto.sample), 186

```

EmceeSampler (*class in pypesto.sample*), 181
 Engine (*class in pypesto.engine*), 206
 Ensemble (*class in pypesto.ensemble*), 213
 ensemble (*pypesto.ensemble.EnsembleType attribute*), 217
 ensemble_crosstab_scatter_lowlevel () (*in module pypesto.visualize*), 190
 ensemble_identifiability () (*in module pypesto.visualize*), 191
 ensemble_scatter_lowlevel () (*in module pypesto.visualize*), 191
 EnsemblePrediction (*class in pypesto.ensemble*), 216
 EnsembleType (*class in pypesto.ensemble*), 217
 Enum (*class in pypesto.ensemble*), 217
 execute () (*pypesto.engine.Engine method*), 206
 execute () (*pypesto.engine.MultiProcessEngine method*), 206
 execute () (*pypesto.engine.MultiThreadEngine method*), 207
 execute () (*pypesto.engine.SingleCoreEngine method*), 207
 execute () (*pypesto.engine.Task method*), 207
 execute () (*pypesto.predict.PredictorTask method*), 165
 exitflag (*pypesto.optimize.OptimizerResult attribute*), 173
 exitflag_path (*pypesto.profile.ProfilerResult attribute*), 177
 extract_from_history ()
 (*pypesto.objective.OptimizerHistory method*), 154
 extract_from_history ()
 (*pypesto.OptimizerHistory method*), 128

F

f (*in module pypesto.store*), 211
 FD (*class in pypesto*), 113
 FD (*class in pypesto.objective*), 138
 FDDelta (*class in pypesto*), 114
 FDDelta (*class in pypesto.objective*), 140
 FidesOptimizer (*class in pypesto.optimize*), 170
 finalize () (*pypesto.CsvHistory method*), 111
 finalize () (*pypesto.Hdf5History method*), 115
 finalize () (*pypesto.History method*), 117
 finalize () (*pypesto.HistoryBase method*), 118
 finalize () (*pypesto.objective.CsvHistory method*), 136
 finalize () (*pypesto.objective.Hdf5History method*), 141
 finalize () (*pypesto.objective.History method*), 143
 finalize () (*pypesto.objective.HistoryBase method*), 143

finalize () (*pypesto.objective.OptimizerHistory method*), 154
 finalize () (*pypesto.OptimizerHistory method*), 128
 fix_parameters () (*pypesto.Problem method*), 130
 fix_parameters () (*pypesto.problem.Problem method*), 160
 flip_profile () (*pypesto.profile.ProfilerResult method*), 177
 FORWARD (*pypesto.FD attribute*), 114
 FORWARD (*pypesto.objective.FD attribute*), 139
 from_optimization_endpoints ()
 (*pypesto.ensemble.Ensemble static method*), 214
 from_optimization_history ()
 (*pypesto.ensemble.Ensemble static method*), 215
 from_sample () (*pypesto.ensemble.Ensemble static method*), 215
 from_yaml () (*pypesto.petab.PetabImporter static method*), 168
 full_index_to_free_index () (*pypesto.Problem method*), 130
 full_index_to_free_index ()
 (*pypesto.problem.Problem method*), 160
 FunctionStartpoints (*class in pypesto.startpoint*), 208
 fval (*pypesto.optimize.OptimizerResult attribute*), 172
 fval (*pypesto.visualize.ReferencePoint attribute*), 189
 fval0 (*pypesto.optimize.OptimizerResult attribute*), 172
 fval_path (*pypesto.profile.ProfilerResult attribute*), 176

G

get () (*pypesto.FDDelta method*), 115
 get () (*pypesto.objective.FDDelta method*), 140
 get_chi2_trace () (*pypesto.CsvHistory method*), 111
 get_chi2_trace () (*pypesto.Hdf5History method*), 115
 get_chi2_trace () (*pypesto.HistoryBase method*), 118
 get_chi2_trace ()
 (*pypesto.MemoryHistory method*), 120
 get_chi2_trace ()
 (*pypesto.objective.CsvHistory method*), 137
 get_chi2_trace ()
 (*pypesto.objective.Hdf5History method*), 141
 get_chi2_trace ()
 (*pypesto.objective.HistoryBase method*), 144
 get_chi2_trace ()
 (*pypesto.objective.MemoryHistory method*), 146
 get_config () (*pypesto.AmiciObjective method*), 110
 get_config () (*pypesto.Objective method*), 123

```
get_config() (pypesto.objective.AggregatedObjective      get_grad()          (pypesto.objective.ObjectiveBase
    method), 133                                         method), 153
get_config()      (pypesto.objective.AmiciObjective      get_grad()          (pypesto.ObjectiveBase method), 126
    method), 136                                         get_grad()          (pypesto.problem.ObjectiveBase method),
get_config()      (pypesto.objective.Objective method), 158
get_config()      (pypesto.objective.ObjectiveBase      get_grad_trace()  (pypesto.CsvHistory  method),
    method), 152                                         112
get_config()      (pypesto.ObjectiveBase method), 126      get_grad_trace()  (pypesto.Hdf5History method),
get_config()      (pypesto.problem.ObjectiveBase      get_grad_trace()  (pypesto.HistoryBase method),
    method), 157                                         118
get_covariance_matrix_parameters() (in      get_grad_trace()  (pypesto.MemoryHistory
    module pypesto.ensemble), 217                     method), 121
get_covariance_matrix_predictions() (in      get_grad_trace()  (pypesto.objective.CsvHistory
    module pypesto.ensemble), 218                     method), 137
get_default_options()      (pypesto.optimize.DlibOptimizer      get_grad_trace()  (pypesto.objective.Hdf5History
    method), 170                                         method), 141
get_default_options()      (pypesto.optimize.Optimizer method), 171      get_grad_trace()  (pypesto.objective.HistoryBase
    method), 174                                         method), 144
get_for_key()      (pypesto.OptimizeResult  method), 127      get_grad_trace()  (pypesto.objective.MemoryHistory
    method), 127                                         method), 146
get_for_key()      (pypesto.result.OptimizeResult      get_hess()          (pypesto.objective.ObjectiveBase
    method), 187                                         method), 153
get_full_matrix()  (pypesto.Problem method), 130      get_hess()          (pypesto.ObjectiveBase method), 126
get_full_matrix()  (pypesto.problem.Problem      get_hess()          (pypesto.problem.ObjectiveBase method),
    method), 160                                         158
get_full_vector() (pypesto.Problem method), 130      get_hess_trace()  (pypesto.CsvHistory  method),
get_full_vector() (pypesto.problem.Problem      get_hess_trace()  (pypesto.Hdf5History method),
    method), 160                                         112
get_fval()          (pypesto.objective.ObjectiveBase      get_hess_trace()  (pypesto.HistoryBase method),
    method), 153                                         118
get_fval()          (pypesto.ObjectiveBase method), 126      get_hess_trace()  (pypesto.MemoryHistory
get_fval()          (pypesto.problem.ObjectiveBase method), 158                                         method), 121
get_fval_trace()  (pypesto.CsvHistory  method), 111      get_hess_trace()  (pypesto.objective.CsvHistory
    method), 137                                         method), 137
get_fval_trace()  (pypesto.Hdf5History method), 116      get_hess_trace()  (pypesto.objective.Hdf5History
    method), 141                                         method), 141
get_fval_trace()  (pypesto.HistoryBase method), 118      get_hess_trace()  (pypesto.objective.HistoryBase
    method), 144                                         method), 144
get_fval_trace()  (pypesto.MemoryHistory      get_hess_trace()  (pypesto.objective.MemoryHistory
    method), 121                                         method), 147
get_fval_trace()  (pypesto.objective.CsvHistory      get_history_directory() (pypesto.Hdf5History
    method), 137                                         method), 116
get_fval_trace()  (pypesto.objective.Hdf5History      get_history_directory() (pypesto.objective.Hdf5History
    method), 141                                         method), 142
get_fval_trace()  (pypesto.objective.HistoryBase      get_last_sample() (pypesto.sample.InternalSampler
    method), 144                                         method), 182
get_fval_trace()  (pypesto.objective.MemoryHistory      get_last_sample() (pypesto.sample.MetropolisSampler
    method), 146                                         method), 183
get_or_create_group() (in      get_or_create_group() (in
    module
```

`pypesto.store)`, 211
`get_pca_representation_parameters()` (in *module pypesto.ensemble*), 218
`get_pca_representation_predictions()` (in *module pypesto.ensemble*), 218
`get_percentile_label()` (in *module pypesto.ensemble*), 219
`get_profiler_result()` (*pypesto.ProfileResult method*), 132
`get_profiler_result()` (*pypesto.result.ProfileResult method*), 187
`get_reduced_matrix()` (*pypesto.Problem method*), 130
`get_reduced_matrix()` (*pypesto.problem.Problem method*), 161
`get_reduced_vector()` (*pypesto.Problem method*), 130
`get_reduced_vector()` (*pypesto.problem.Problem method*), 161
`get_res()` (*pypesto.objective.ObjectiveBase method*), 153
`get_res()` (*pypesto.ObjectiveBase method*), 126
`get_res()` (*pypesto.problem.ObjectiveBase method*), 158
`get_res_trace()` (*pypesto.CsvHistory method*), 112
`get_res_trace()` (*pypesto.Hdf5History method*), 116
`get_res_trace()` (*pypesto.HistoryBase method*), 118
`get_res_trace()` (*pypesto.MemoryHistory method*), 121
`get_res_trace()` (*pypesto.objective.CsvHistory method*), 137
`get_res_trace()` (*pypesto.objective.Hdf5History method*), 142
`get_res_trace()` (*pypesto.objective.HistoryBase method*), 144
`get_res_trace()` (*pypesto.objective.MemoryHistory method*), 147
`get_samples()` (*pypesto.sample.EmceeSampler method*), 181
`get_samples()` (*pypesto.sample.MetropolisSampler method*), 183
`get_samples()` (*pypesto.sample.ParallelTemperingSampler method*), 184
`get_samples()` (*pypesto.sample.Pymc3Sampler method*), 184
`get_samples()` (*pypesto.sample.Sampler method*), 185
`get_schi2_trace()` (*pypesto.CsvHistory method*), 112
`get_schi2_trace()` (*pypesto.Hdf5History method*), 116
`get_schi2_trace()` (*pypesto.HistoryBase method*), 118
`get_schi2_trace()` (in *module pypesto.ensemble*), 211
`get_schi2_trace()` (*pypesto.objective.CsvHistory method*), 137
`get_schi2_trace()` (*pypesto.objective.Hdf5History method*), 142
`get_schi2_trace()` (*pypesto.objective.HistoryBase method*), 144
`get_schi2_trace()` (*pypesto.objective.MemoryHistory method*), 147
`get_spectral_decomposition_lowlevel()` (in *module pypesto.ensemble*), 219
`get_spectral_decomposition_parameters()` (in *module pypesto.ensemble*), 220
`get_spectral_decomposition_predictions()` (in *module pypesto.ensemble*), 221
`get_sres()` (*pypesto.objective.ObjectiveBase method*), 153
`get_sres()` (*pypesto.ObjectiveBase method*), 126
`get_sres()` (*pypesto.problem.ObjectiveBase method*), 158
`get_sres_trace()` (*pypesto.CsvHistory method*), 112
`get_sres_trace()` (*pypesto.Hdf5History method*), 116
`get_sres_trace()` (*pypesto.HistoryBase method*), 119
`get_sres_trace()` (*pypesto.MemoryHistory method*), 121
`get_sres_trace()` (*pypesto.objective.CsvHistory method*), 137
`get_sres_trace()` (*pypesto.objective.Hdf5History method*), 142
`get_sres_trace()` (*pypesto.objective.HistoryBase method*), 144
`get_sres_trace()` (*pypesto.objective.MemoryHistory method*), 147
`get_time_trace()` (*pypesto.CsvHistory method*), 112
`get_time_trace()` (*pypesto.Hdf5History method*), 116
`get_time_trace()` (*pypesto.HistoryBase method*), 119
`get_time_trace()` (*pypesto.MemoryHistory method*), 121
`get_time_trace()` (*pypesto.objective.CsvHistory method*), 137
`get_time_trace()` (*pypesto.objective.Hdf5History method*), 142
`get_time_trace()` (*pypesto.objective.HistoryBase method*), 144
`get_time_trace()` (*pypesto.objective.MemoryHistory method*)

method), 147
get_trimmed_indices() (pypesto.HistoryBase method), 119
get_trimmed_indices() (pypesto.objective.HistoryBase method), 144
get_umap_representation_parameters() (in module pypesto.ensemble), 222
get_umap_representation_predictions() (in module pypesto.ensemble), 222
get_x_trace() (pypesto.CsvHistory method), 112
get_x_trace() (pypesto.Hdf5History method), 117
get_x_trace() (pypesto.HistoryBase method), 119
get_x_trace() (pypesto.MemoryHistory method), 121
get_x_trace() (pypesto.objective.CsvHistory method), 138
get_x_trace() (pypesto.objective.Hdf5History method), 142
get_x_trace() (pypesto.objective.HistoryBase method), 144
get_x_trace() (pypesto.objective.MemoryHistory method), 147
geweke_test() (in module pypesto.sample), 186
grad (pypesto.objective.FD attribute), 139
grad (pypesto.optimize.OptimizerResult attribute), 172
grad_min (pypesto.objective.OptimizerHistory attribute), 154
grad_min (pypesto.OptimizerHistory attribute), 128
gradient_neg_log_density() (pypesto.objective.NegLogParameterPriors method), 148
gradnorm_path (pypesto.profile.ProfilerResult attribute), 176
group_path (in module pypesto.store), 211

H

has_fun() (pypesto.FD property), 114
has_fun() (pypesto.Objective property), 123
has_fun() (pypesto.objective.FD property), 139
has_fun() (pypesto.objective.Objective property), 150
has_fun() (pypesto.objective.ObjectiveBase property), 153
has_fun() (pypesto.ObjectiveBase property), 126
has_fun() (pypesto.problem.ObjectiveBase property), 158
has_grad() (pypesto.FD property), 114
has_grad() (pypesto.Objective property), 123
has_grad() (pypesto.objective.FD property), 139
has_grad() (pypesto.objective.Objective property), 150
has_grad() (pypesto.objective.ObjectiveBase property), 153
has_grad() (pypesto.ObjectiveBase property), 126
has_hess() (pypesto.FD property), 114
has_hess() (pypesto.Objective property), 123
has_hess() (pypesto.objective.FD property), 139
has_hess() (pypesto.objective.Objective property), 150
has_hess() (pypesto.objective.ObjectiveBase property), 153
has_hess() (pypesto.ObjectiveBase property), 126
has_hess() (pypesto.problem.ObjectiveBase property), 158
has_hessp() (pypesto.Objective property), 123
has_hessp() (pypesto.objective.Objective property), 150
has_hessp() (pypesto.objective.ObjectiveBase property), 153
has_hessp() (pypesto.ObjectiveBase property), 126
has_hessp() (pypesto.problem.ObjectiveBase property), 158
has_res() (pypesto.FD property), 114
has_res() (pypesto.Objective property), 123
has_res() (pypesto.objective.FD property), 139
has_res() (pypesto.objective.Objective property), 150
has_res() (pypesto.objective.ObjectiveBase property), 153
has_res() (pypesto.ObjectiveBase property), 126
has_res() (pypesto.problem.ObjectiveBase property), 158
has_sres() (pypesto.FD property), 114
has_sres() (pypesto.Objective property), 123
has_sres() (pypesto.objective.FD property), 139
has_sres() (pypesto.objective.Objective property), 150
has_sres() (pypesto.objective.ObjectiveBase property), 153
has_sres() (pypesto.ObjectiveBase property), 126
has_sres() (pypesto.problem.ObjectiveBase property), 158
Hdf5History (class in pypesto), 115
Hdf5History (class in pypesto.objective), 141
hess (pypesto.objective.FD attribute), 139
hess (pypesto.optimize.OptimizerResult attribute), 172
hess_min (pypesto.objective.OptimizerHistory attribute), 154
hess_min (pypesto.OptimizerHistory attribute), 128
hess_via_fval (pypesto.objective.FD attribute), 139
hessian_neg_log_density() (pypesto.objective.NegLogParameterPriors method), 148
hessian_vp_neg_log_density() (pypesto.objective.NegLogParameterPriors method), 148
History (class in pypesto), 117

History (*class in pypesto.objective*), 143
 history (*pypesto.objective.ObjectiveBase attribute*), 150
 history (*pypesto.ObjectiveBase attribute*), 123
 history (*pypesto.optimize.OptimizerResult attribute*), 173
 history (*pypesto.problem.ObjectiveBase attribute*), 155
 HistoryBase (*class in pypesto*), 118
 HistoryBase (*class in pypesto.objective*), 143
 HistoryOptions (*class in pypesto*), 119
 HistoryOptions (*class in pypesto.objective*), 145

|

id (*pypesto.optimize.OptimizerResult attribute*), 172
 id (*pypesto.predict.PredictorTask attribute*), 165
 initialize() (*pypesto.AmiciObjective method*), 110
 initialize() (*pypesto.objective.AggregatedObjective method*), 133
 initialize() (*pypesto.objective.AmiciCalculator method*), 134
 initialize() (*pypesto.objective.AmiciObjective method*), 136
 initialize() (*pypesto.objective.ObjectiveBase method*), 153
 initialize() (*pypesto.ObjectiveBase method*), 126
 initialize() (*pypesto.problem.ObjectiveBase method*), 158
 initialize() (*pypesto.sample.AdaptiveMetropolisSampler method*), 181
 initialize() (*pypesto.sample.EmceeSampler method*), 181
 initialize() (*pypesto.sample.MetropolisSampler method*), 183
 initialize() (*pypesto.sample.ParallelTemperingSampler method*), 184
 initialize() (*pypesto.sample.Pymc3Sampler method*), 184
 initialize() (*pypesto.sample.Sampler method*), 185
 InternalSampler (*class in pypesto.sample*), 182
 IpoptOptimizer (*class in pypesto.optimize*), 170
 is_least_squares()
 (*pypesto.optimize.CmaesOptimizer method*), 169
 is_least_squares()
 (*pypesto.optimize.DlibOptimizer method*), 170
 is_least_squares()
 (*pypesto.optimize.FidesOptimizer method*), 170
 is_least_squares()
 (*pypesto.optimize.IpoptOptimizer method*), 170

is_least_squares()
 (*pypesto.optimize.NloptOptimizer method*), 171
 is_least_squares()
 (*pypesto.optimize.Optimizer method*), 171
 is_least_squares()
 (*pypesto.optimize.PyswarmOptimizer method*), 173
 is_least_squares()
 (*pypesto.optimize.PyswarmsOptimizer method*), 174
 is_least_squares()
 (*pypesto.optimize.ScipyDifferentialEvolutionOptimizer method*), 174
 is_least_squares()
 (*pypesto.optimize.ScipyOptimizer method*), 174

L

LatinHypercubeStartpoints (*class in pypesto.startpoint*), 208
 lb() (*pypesto.Problem property*), 131
 lb() (*pypesto.problem.Problem property*), 161
 lb_init() (*pypesto.Problem property*), 131
 lb_init() (*pypesto.problem.Problem property*), 161
 legend (*pypesto.visualize.ReferencePoint attribute*), 189
 load() (*pypesto.Hdf5History static method*), 117
 load() (*pypesto.optimize.Hdf5History static method*), 142
 load_objective_config() (*in module pypesto.store*), 212
 log() (*in module pypesto.logging*), 213
 log_to_console() (*in module pypesto.logging*), 213
 log_to_file() (*in module pypesto.logging*), 213

M

make_internal() (*pypesto.sample.InternalSampler method*), 182
 make_internal() (*pypesto.sample.MetropolisSampler method*), 183
 max_distance (*pypesto.objective.FDDelta attribute*), 140
 max_steps (*pypesto.objective.FDDelta attribute*), 140
 McmcPtResult (*class in pypesto.sample*), 182
 MemoryHistory (*class in pypesto*), 120
 MemoryHistory (*class in pypesto.objective*), 146
 message (*pypesto.optimize.OptimizerResult attribute*), 173
 message (*pypesto.profile.ProfilerResult attribute*), 177
 method (*pypesto.objective.FD attribute*), 140
 METHODS (*pypesto.FD attribute*), 114
 METHODS (*pypesto.objective.FD attribute*), 139
 MetropolisSampler (*class in pypesto.sample*), 183

```

minimize() (in module pypesto.optimize), 175
minimize() (pypesto.optimize.CmaesOptimizer
    method), 169
minimize() (pypesto.optimize.DlibOptimizer method),
    170
minimize() (pypesto.optimize.FidesOptimizer
    method), 170
minimize() (pypesto.optimize.IpoptOptimizer
    method), 170
minimize() (pypesto.optimize.NLoptOptimizer
    method), 171
minimize() (pypesto.optimize.Optimizer method), 171
minimize() (pypesto.optimize.PyswarmOptimizer
    method), 173
minimize() (pypesto.optimize.PyswarmsOptimizer
    method), 174
minimize() (pypesto.optimize.ScipyDifferentialEvolution
    method), 174
minimize() (pypesto.optimize.ScipyOptimizer
    method), 174
mode (pypesto.predict.PredictorTask attribute), 165
MODEL_BASE_DIR (pypesto.petab.PetabImporter at-
    tribute), 165
module
    pypesto, 109
    pypesto.engine, 206
    pypesto.ensemble, 213
    pypesto.logging, 213
    pypesto.objective, 132
    pypesto.optimize, 169
    pypesto.petab, 165
    pypesto.predict, 162
    pypesto.problem, 155
    pypesto.profile, 175
    pypesto.result, 186
    pypesto.sample, 180
    pypesto.startpoint, 207
    pypesto.store, 209
    pypesto.visualize, 188
MultiProcessEngine (class in pypesto.engine), 206
MultiThreadEngine (class in pypesto.engine), 207

N
n_fval (pypesto.optimize.OptimizerResult attribute),
    172
n_fval (pypesto.profile.ProfilerResult attribute), 177
n_fval() (pypesto.Hdf5History property), 117
n_fval() (pypesto.History property), 117
n_fval() (pypesto.HistoryBase property), 119
n_fval() (pypesto.objective.Hdf5History property),
    142
n_fval() (pypesto.objective.History property), 143
n_fval() (pypesto.objective.HistoryBase property),
    145
n_grad (pypesto.optimize.OptimizerResult attribute),
    172
n_grad (pypesto.profile.ProfilerResult attribute), 177
n_grad() (pypesto.Hdf5History property), 117
n_grad() (pypesto.History property), 117
n_grad() (pypesto.HistoryBase property), 119
n_grad() (pypesto.objective.Hdf5History property),
    142
n_grad() (pypesto.objective.History property), 143
n_grad() (pypesto.objective.HistoryBase property),
    145
n_hess (pypesto.optimize.OptimizerResult attribute),
    172
n_hess (pypesto.profile.ProfilerResult attribute), 177
n_hess() (pypesto.Hdf5History property), 117
n_hess() (pypesto.History property), 117
n_hess() (pypesto.HistoryBase property), 119
n_hess() (pypesto.objective.Hdf5History property),
    142
n_hess() (pypesto.objective.History property), 143
n_hess() (pypesto.objective.HistoryBase property),
    145
n_res (pypesto.optimize.OptimizerResult attribute), 172
n_res() (pypesto.Hdf5History property), 117
n_res() (pypesto.History property), 117
n_res() (pypesto.HistoryBase property), 119
n_res() (pypesto.objective.Hdf5History property), 142
n_res() (pypesto.objective.History property), 143
n_res() (pypesto.objective.HistoryBase property), 145
n_sres (pypesto.optimize.OptimizerResult attribute),
    172
n_sres() (pypesto.Hdf5History property), 117
n_sres() (pypesto.History property), 117
n_sres() (pypesto.HistoryBase property), 119
n_sres() (pypesto.objective.Hdf5History property),
    143
n_sres() (pypesto.objective.History property), 143
n_sres() (pypesto.objective.HistoryBase property),
    145
name (pypesto.ensemble.Enum attribute), 217
neg_log_density()
    (pypesto.objective.NegLogParameterPriors
        method), 148
NegLogParameterPriors (class in
    pypesto.objective), 147
NegLogPriors (class in pypesto), 122
NegLogPriors (class in pypesto.objective), 148
NegLogPriors (class in pypesto.problem), 155
NLoptOptimizer (class in pypesto.optimize), 170
normalize() (pypesto.Problem method), 131
normalize() (pypesto.problem.Problem method), 161

O
obj (pypesto.objective.FD attribute), 140

```

Objective (*class in pypesto*), 122
 Objective (*class in pypesto.objective*), 149
 ObjectiveBase (*class in pypesto*), 123
 ObjectiveBase (*class in pypesto.objective*), 150
 ObjectiveBase (*class in pypesto.problem*), 155
 optimization_result_from_history () (in module pypesto.store), 212
 optimization_run_properties_one_plot () (in module pypesto.visualize), 192
 optimization_run_properties_per_multistart () (in module pypesto.visualize), 192
 optimization_run_property_per_multistart () (in module pypesto.visualize), 194
 OptimizationResultHDF5Reader (*class in pypesto.store*), 209
 OptimizationResultHDF5Writer (*class in pypesto.store*), 210
 optimize_result (*pypesto.Result attribute*), 132
 optimize_result (*pypesto.result.Result attribute*), 188
 OptimizeOptions (*class in pypesto.optimize*), 171
 Optimizer (*class in pypesto.optimize*), 171
 optimizer_convergence () (in module pypesto.visualize), 195
 optimizer_history () (in module pypesto.visualize), 195
 optimizer_history_lowlevel () (in module pypesto.visualize), 196
 OptimizeResult (*class in pypesto*), 127
 OptimizeResult (*class in pypesto.result*), 187
 OptimizerHistory (*class in pypesto*), 127
 OptimizerHistory (*class in pypesto.objective*), 154
 OptimizerResult (*class in pypesto.optimize*), 171
 output_to_tuple () (*pypesto.objective.ObjectiveBase static method*), 153
 output_to_tuple () (*pypesto.ObjectiveBase static method*), 126
 output_to_tuple () (*pypesto.problem.ObjectiveBase static method*), 158
P
 par_arr_to_dct () (*pypesto.AmiciObjective method*), 110
 par_arr_to_dct () (*pypesto.objective.AmiciObjective method*), 136
 ParallelTemperingSampler (*class in pypesto.sample*), 183
 parameter_hist () (in module pypesto.visualize), 196
 parameter_profile () (in module pypesto.profile), 179
 parameters () (in module pypesto.visualize), 197
 parameters_lowlevel () (in module pypesto.visualize), 197
 PetabImporter (*class in pypesto.petab*), 165
 PetabImporterPysb (*class in pypesto.petab*), 169
 pre_post_processor
 (pypesto.objective.ObjectiveBase attribute), 150
 pre_post_processor (*pypesto.ObjectiveBase attribute*), 123
 post_processor
 (pypesto.problem.ObjectiveBase attribute), 155
 predict () (*pypesto.ensemble.Ensemble method*), 215
 prediction_to_petab_measurement_df () (*pypesto.petab.PetabImporter method*), 168
 prediction_to_petab_simulation_df () (*pypesto.petab.PetabImporter method*), 168
 PredictionConditionResult (*class in pypesto.predict*), 163
 PredictionResult (*class in pypesto.predict*), 164
 predictor (*pypesto.predict.PredictorTask attribute*), 165
 PredictorTask (*class in pypesto.predict*), 165
 print_parameter_summary () (*pypesto.Problem method*), 131
 print_parameter_summary () (*pypesto.problem.Problem method*), 161
 Problem (*class in pypesto*), 128
 Problem (*class in pypesto.problem*), 159
 problem (*pypesto.Result attribute*), 132
 problem (*pypesto.result.Result attribute*), 188
 ProblemHDF5Reader (*class in pypesto.store*), 210
 ProblemHDF5Writer (*class in pypesto.store*), 210
 process_offset_y () (in module pypesto.visualize), 198
 process_result_list () (in module pypesto.visualize), 198
 process_y_limits () (in module pypesto.visualize), 199
 profile_cis () (in module pypesto.visualize), 199
 profile_lowlevel () (in module pypesto.visualize), 199
 profile_result (*pypesto.Result attribute*), 132
 profile_result (*pypesto.result.Result attribute*), 188
 ProfileOptions (*class in pypesto.profile*), 175
 ProfileResult (*class in pypesto*), 131
 ProfileResult (*class in pypesto.result*), 187
 ProfileResultHDF5Reader (*class in pypesto.store*), 210
 ProfileResultHDF5Writer (*class in pypesto.store*), 211
 ProfilerResult (*class in pypesto.profile*), 176
 profiles () (in module pypesto.visualize), 200

profiles_lowlevel() (in module <code>pypesto.visualize</code>), 200	projection_scatter_pca() (in module <code>pypesto.visualize</code>), 201	projection_scatter_umap() (in module <code>pypesto.visualize</code>), 201	projection_scatter_umap_original() (in module <code>pypesto.visualize</code>), 202	Pymc3Sampler (<i>class</i> in <code>pypesto.sample</code>), 184	pypesto	module, 109	pypesto.engine	module, 206	pypesto.ensemble	module, 213	pypesto.logging	module, 213	pypesto.objective	module, 132	pypesto.optimize	module, 169	pypesto.petab	module, 165	pypesto.predict	module, 162	pypesto.problem	module, 155	pypesto.profile	module, 175	pypesto.result	module, 186	pypesto.sample	module, 180	pypesto.startpoint	module, 207	pypesto.store	module, 209	pypesto.visualize	module, 188	PyswarmOptimizer (<i>class</i> in <code>pypesto.optimize</code>), 173	PyswarmsOptimizer (<i>class</i> in <code>pypesto.optimize</code>), 173
R	ratio_path (<code>pypesto.profile.ProfilerResult</code> attribute), 176	rdatas_to_measurement_df() (<code>pypesto.petab.PetabImporter</code> method), 168	rdatas_to_simulation_df() (<code>pypesto.petab.PetabImporter</code> method), 169	read() (<code>pypesto.store.OptimizationResultHDF5Reader</code> method), 209	read() (<code>pypesto.store.ProblemHDF5Reader</code> method), 210	read() (in module <code>pypesto.store.ProfileResultHDF5Reader</code> method), 211	read() (in module <code>pypesto.store.SamplingResultHDF5Reader</code> method), 211	read_ensemble_prediction_from_h5() (in module <code>pypesto.ensemble</code>), 222	read_from_csv() (in module <code>pypesto.ensemble</code>), 223	read_from_df() (in module <code>pypesto.ensemble</code>), 223	read_result() (in module <code>pypesto.store</code>), 212	read_result_from_file() (in module <code>pypesto.optimize</code>), 175	ReferencePoint (<i>class</i> in <code>pypesto.visualize</code>), 188	res (<code>pypesto.optimize.OptimizerResult</code> attribute), 172	res_min (<code>pypesto.objective.OptimizerHistory</code> attribute), 154	res_min (<code>pypesto.OptimizerHistory</code> attribute), 128	res_to_chi2() (in module <code>pypesto.objective</code>), 155	reset_steadystate_guesses() (<code>pypesto.AmiciObjective</code> method), 111	reset_steadystate_guesses() (<code>pypesto.objective.AmiciObjective</code> method), 136	residual() (<code>pypesto.objective.NegLogParameterPriors</code> method), 148	residual_jacobian() (<code>pypesto.objective.NegLogParameterPriors</code> method), 148	Result (<i>class</i> in <code>pypesto</code>), 132	Result (<i>class</i> in <code>pypesto.result</code>), 188													
S	sample (<code>pypesto.ensemble.EnsembleType</code> attribute), 217	sample() (in module <code>pypesto.sample</code>), 186	sample() (<code>pypesto.sample.EmceeSampler</code> method), 181	sample() (<code>pypesto.sample.MetropolisSampler</code> method), 183	sample() (<code>pypesto.sample.ParallelTemperingSampler</code> method), 184	sample() (<code>pypesto.sample.Pymc3Sampler</code> method), 184	sample() (<code>pypesto.sample.Sampler</code> method), 185	sample_result (<code>pypesto.Result</code> attribute), 132	sample_result (<code>pypesto.result.Result</code> attribute), 188	Sampler (<i>class</i> in <code>pypesto.sample</code>), 184	SampleResult (<i>class</i> in <code>pypesto</code>), 132	SampleResult (<i>class</i> in <code>pypesto.result</code>), 188	sampling_1d_marginals() (in module <code>pypesto.visualize</code>), 202	sampling_fval_traces() (in module <code>pypesto.visualize</code>), 202	sampling_parameter_cis() (in module <code>pypesto.visualize</code>), 203																					

sampling_parameter_traces() (in module `pypesto.visualize`), 203

sampling_prediction_trajectories() (in module `pypesto.visualize`), 204

sampling_scatter() (in module `pypesto.visualize`), 205

`SamplingResultHDF5Reader` (class in `pypesto.store`), 211

`SamplingResultHDF5Writer` (class in `pypesto.store`), 211

`ScipyDifferentialEvolutionOptimizer` (class in `pypesto.optimize`), 174

`ScipyOptimizer` (class in `pypesto.optimize`), 174

`sensi_orders` (`pypesto.predict.PredictorTask` attribute), 165

`set_custom_timepoints()` (`pypesto.AmiciObjective` method), 111

`set_custom_timepoints()` (`pypesto.objective.AmiciObjective` method), 136

`set_last_sample()` (`pypesto.sample.InternalSampler` method), 182

`set_last_sample()` (`pypesto.sample.MetropolisSampler` method), 183

`set_profiler_result()` (`pypesto.ProfileResult` method), 132

`set_profiler_result()` (`pypesto.result.ProfileResult` method), 188

`set_x_guesses()` (`pypesto.Problem` method), 131

`set_x_guesses()` (`pypesto.problem.Problem` method), 161

`SingleCoreEngine` (class in `pypesto.engine`), 207

`sort()` (`pypesto.OptimizeResult` method), 127

`sort()` (`pypesto.result.OptimizeResult` method), 187

`sres` (`pypesto.objective.FD` attribute), 140

`sres` (`pypesto.optimize.OptimizerResult` attribute), 172

`sres_min` (`pypesto.objective.OptimizerHistory` attribute), 154

`sres_min` (`pypesto.OptimizerHistory` attribute), 128

`sres_to_schi2()` (in module `pypesto.objective`), 155

`start_time()` (`pypesto.History` property), 117

`start_time()` (`pypesto.HistoryBase` property), 119

`start_time()` (`pypesto.objective.History` property), 143

`start_time()` (`pypesto.objective.HistoryBase` property), 145

`StartpointMethod` (class in `pypesto.startpoint`), 208

`STEPS` (`pypesto.FDDelta` attribute), 115

`STEPS` (`pypesto.objective.FDDelta` attribute), 140

`steps` (`pypesto.objective.FDDelta` attribute), 140

`storage_filename` (`pypesto.store.OptimizationResultHDF5Reader` attribute), 209

`storage_filename` (`pypesto.store.OptimizationResultHDF5Writer` attribute), 210

`storage_filename` (`pypesto.store.ProblemHDF5Reader` attribute), 210

`storage_filename` (`pypesto.store.ProblemHDF5Writer` attribute), 210

`storage_filename` (`pypesto.store.ProfileResultHDF5Reader` attribute), 210

`storage_filename` (`pypesto.store.ProfileResultHDF5Writer` attribute), 211

`storage_filename` (`pypesto.store.SamplingResultHDF5Reader` attribute), 211

`storage_filename` (`pypesto.store.SamplingResultHDF5Writer` attribute), 211

`store_steadystate_guess()` (`pypesto.AmiciObjective` method), 111

`store_steadystate_guess()` (`pypesto.objective.AmiciObjective` method), 136

`SupportsFloat` (class in `pypesto.problem`), 161

`SupportsInt` (class in `pypesto.problem`), 161

`swap_samples()` (`pypesto.sample.ParallelTemperingSampler` method), 184

T

`Task` (class in `pypesto.engine`), 207

`test_deltas` (`pypesto.objective.FDDelta` attribute), 140

`time` (`pypesto.optimize.OptimizerResult` attribute), 173

`time_path` (`pypesto.profile.ProfilerResult` attribute), 177

`time_total` (`pypesto.profile.ProfilerResult` attribute), 177

`to_startpoint_method()` (in module `pypesto.startpoint`), 209

`trace_save_iter()` (`pypesto.Hdf5History` property), 117

`trace_save_iter()` (`pypesto.objective.Hdf5History` property), 143

`translate_options()` (`pypesto.sample.Pymc3Sampler` class method), 184

`translate_options()` (`pypesto.sample.Sampler` class method), 185

U

`ub()` (`pypesto.Problem` property), 131

`ub()` (`pypesto.problem.Problem` property), 161

`ub_init()` (`pypesto.Problem` property), 131

`ub_init()` (`pypesto.problem.Problem` property), 161

`unfix_parameters()` (`pypesto.Problem` method), 131

`unfix_parameters()` (`pypesto.problem.Problem` method), 161

```

UniformStartpoints (class in pypesto.startpoint),    write()      (pypesto.store.SamplingResultHDF5Writer
    208                                               method), 211
unprocessed_chain
    (pypesto.ensemble.EnsembleType attribute),       write_array() (in module pypesto.store), 212
    217                                               write_ensemble_prediction_to_h5()   (in
                                                module pypesto.ensemble), 223
update() (pypesto.CsvHistory method), 112
update() (pypesto.FDDelta method), 115
update() (pypesto.Hdf5History method), 117
update() (pypesto.History method), 118
update() (pypesto.HistoryBase method), 119
update() (pypesto.MemoryHistory method), 122
update() (pypesto.objective.CsvHistory method), 138
update() (pypesto.objective.FDDelta method), 140
update() (pypesto.objective.Hdf5History method), 143
update() (pypesto.objective.History method), 143
update() (pypesto.objective.HistoryBase method), 145
update() (pypesto.objective.MemoryHistory method),
    147
update() (pypesto.objective.OptimizerHistory
    method), 154
update() (pypesto.OptimizerHistory method), 128
update_condition (pypesto.objective.FDDelta at-
    tribute), 141
UPDATE_CONDITIONS (pypesto.FDDelta attribute),
    115
UPDATE_CONDITIONS (pypesto.objective.FDDelta at-
    tribute), 140
update_from_problem()
    (pypesto.objective.ObjectiveBase     method),
    153
update_from_problem() (pypesto.ObjectiveBase
    method), 127
update_from_problem()
    (pypesto.problem.ObjectiveBase      method),
    158
update_to_full() (pypesto.optimize.OptimizerResult
    method), 173

```

V

```

validation_profile_significance()      (in
    module pypesto.profile), 179
value (pypesto.ensemble.Enum attribute), 217

```

W

```

waterfall() (in module pypesto.visualize), 205
waterfall_lowlevel()      (in      module
    pypesto.visualize), 206
write() (pypesto.store.OptimizationResultHDF5Writer
    method), 210
write() (pypesto.store.ProblemHDF5Writer method),
    210
write() (pypesto.store.ProfileResultHDF5Writer
    method), 211

```

```

write()      (pypesto.store.SamplingResultHDF5Writer
method), 211
write_array() (in module pypesto.store), 212
write_ensemble_prediction_to_h5()   (in
    module pypesto.ensemble), 223
write_result() (in module pypesto.store), 212
write_to_csv()  (pypesto.predict.PredictionResult
    method), 164
write_to_h5()   (pypesto.predict.PredictionResult
    method), 164

```

X

```

x (pypesto.optimize.OptimizerResult attribute), 172
x (pypesto.predict.PredictorTask attribute), 165
x (pypesto.visualize.ReferencePoint attribute), 189
x0 (pypesto.objective.FDDelta attribute), 141
x0 (pypesto.optimize.OptimizerResult attribute), 172
x_free_indices() (pypesto.Problem property), 131
x_free_indices() (pypesto.problem.Problem prop-
erty), 161
x_guesses() (pypesto.Problem property), 131
x_guesses() (pypesto.problem.Problem property),
    161
x_names() (pypesto.objective.ObjectiveBase prop-
erty), 154
x_names() (pypesto.ObjectiveBase property), 127
x_names() (pypesto.problem.ObjectiveBase property),
    159
x_path (pypesto.profile.ProfilerResult attribute), 176

```